




inTEC[®]
LIGHT

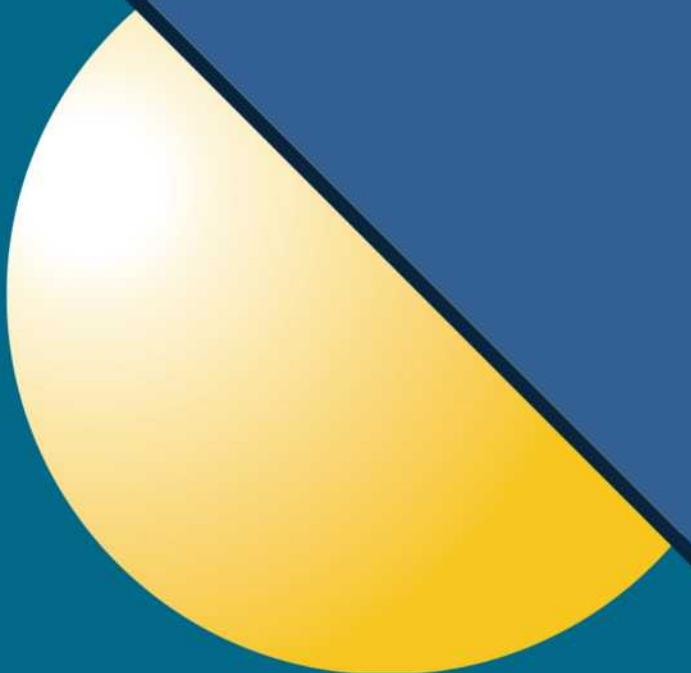

iNTEC[®]
LIGHT

La nostra storia comincia dal momento in cui l'arte del vetro entra nella nostra famiglia. Siamo agli inizi del 900' e Antonio Tammaro diventa un affermato Mastro vetrario a Napoli, creando , quelle che all'epoca, erano considerate opere d'arte.

Our story began when the art of glass entered our family. We were at the beginning of the 1900s and Antonio Tammaro became an established master glassmaker in Naples, creating what at the time were considered works of art.

Come tradizione insegna, l'arte passa di padre in figlio. Carmine, seguendo le orme del padre, continua con l'arte del vetro cristallo per tavolame, ma l'avvento dell'industrializzazione lo costringe a un cambio di rotta: lavorazione di vetro soffiato per illuminazione. Fonda così ,alla fine degli anni 50', la VE.CRI.N.

As tradition teaches, art skill passes from father to son. Carmine, following in his father's footsteps, continued with the art of crystal glass for tableware, but the advent of industrialization forces him to change course: starting the processing of blown glass for lighting. Thus, at the end of the 1950s, VE.CRI.N. was founded

Negli anni 80' nasce la vetreria Tammaro e figli. Il salto generazionale porta parte del processo produttivo alla meccanizzazione che, affiancata alla classica lavorazione del vetro, permette all'azienda di adeguare la produzione alla richiesta in tempi brevissimi (a differenza delle aziende completamente meccanizzate obbligate a produzione di massa dello stesso articolo). Questa flessibilità permette di raggiungere clientele diversificate.

In the 80s "Vetreria Tammaro e Figli" glass factory was born. The generational leap brought part of the production process to mechanization, which, alongside the classic glass processing, allowed the company to adapt the production to the market demand in a very short time (unlike fully mechanized companies obliged to mass production of the same article). This flexibility of production did allow us to reach diversified customers.

Lo spettro della globalizzazione e il fulmineo sviluppo dei paesi extra europei instillano nella mente del giovane Franco , figlio di Carmine, l'idea di lanciare sul mercato il prodotto d'illuminazione assemblato. Nasce ,così, negli anni 90' la F.A.N. Europe lighting che , in breve tempo s'impone sul mercato proponendo articoli nei quali il vetro rimanga elemento primario.

The threat of globalization and the rapid development of extra-European countries instilled in the mind of young Franco, Carmine's son, the idea of launching the assembled lighting product on the market. Thus F.A.N. Europe Lighting was born in the 90s. In a short time, this new company imposed itself on the market by offering assembled light items in which glass remains a primary element.

Alla fine degli anni 90' , per mantenere alto il target di qualità e al contempo diversificare sempre di più la gamma dei prodotti, Franco fonda la L.V.F. , azienda che produce parti metalliche per illuminazione: alla lavorazione del vetro soffiato e centrifugato si aggiunge, con la nascita dell'azienda 2T, quella del vetro a lastra. La F.A.N. Mantiene il ruolo di assemblaggio, controllo qualità e lancio sul mercato del prodotto finito.

At the end of the 90s, to keep the quality target high and at the same time to diversify the range of products more and more, Franco founded L.V.F. , a company that manufactured metal parts for lighting. With the creation of the company 2T, production of bent glass was added to the processing of blown and centrifuged glass. In this way F.A.N. Maintained the role of assembly, quality control and launch of the finished product on the market.

Nel 2010 , periodo di crisi economica europea, i costi ormai diventati insostenibili per la gestione della produzione del vetro, unitamente a un carenza di materia prima nel paese e a un non ben delineato settore di ricerca e sviluppo delle tecnologie emergenti nel campo dell'illuminazione (LED), costringono Franco a spegnere definitivamente i forni.

Comincia così la collaborazione con aziende extraeuropee che possano realizzare sia prodotti altamente tecnologici che dal design ricercato, rispettando costantemente le linee guida e gli standard richiesti da Franco e i requisiti delle normative europee. La F.A.N. Europe lighting lancia sul mercato i marchi IN.TEC. E Luce Ambiente Design che racchiudono le esigenze tecnologiche e stilistiche per qualunque ambiente.

On 2010, a period of European economic crisis, production costs became unsustainable for the management of glass production. Furthermore, the shortage of raw materials in our country and a poorly defined sector of research and poor development of emerging technologies in the field of lighting (LED), did force Franco to permanently switch off the ovens. Thus cooperation with non-European companies did begin and did start the possibility to create both highly technological products and refined designed products, constantly respecting the guidelines and standards required by Franco and the requirements of European norms and regulations. F.A.N. Europe Lighting launched the brands IN.TEC and Luce Ambiente Design on the market that both encompass the technological and stylistic needs for any light environment.

Oggi la FAN Europe lighting si affaccia al futuro: i fratelli Tammaro Letizia, Carmine e Davide si affiancano al padre per gestire rispettivamente amministrazione e rapporti con l'estero, ricerca - sviluppo e logistica , area commerciale e assistenza con un team affidato di 40 persone. Alla storica sede di Nola con i suoi 15000 metri quadrati coperti su 30000 totali si aggiungerà la nuova sede a Milano studiata per ampliare i rapporti con l'Europa, migliorare ulteriormente la logistica ma soprattutto per un controllo qualità sempre più minuzioso e attento.

Today FAN Europe lighting faces the future: the brothers Tammaro Letizia, Carmine and Davide work alongside their father to manage the administration and foreign relations, research - development and logistics, commercial area and assistance with a close-knit team of 40 people . The new headquarters in Milan, designed to expand relations with Europe, will be added to the historic site in Nola with its 15,000 square meters out of 30,000 in total, improving logistics but above all for increasingly meticulous and careful quality control.

Nasce l'app intec, la luce diventa smart con prodotti app e voice control. Nuovi servizi di customizzazione e domotica per adattare in maniera funzionale i prodotti professionali. Luci industriali ad alti lumen e consumi green. Cataloghi in continua evoluzione per tenersi al passo con la tecnologia che avanza e nuovi design.

The Intec app is born, the light becomes smart with app products and voice control. New personalization and home automation services for the functional adaptation of professional products. High lumen industrial lights and green consumption. Constantly evolving catalogues to keep up with advancing technology and new designs.

La tradizione continua, diventa innovativa; un nuovo concetto di luce fatto su misura per tutti gli ambienti e gli stili.

Good Light & Good Style!

The tradition continues, it becomes innovative; a new concept of light tailored to all environments and styles.

Good Light & Good Style!



Illuminazione su misura

L'evoluzione stilistica e tecnologica dell'illuminazione focalizzata sempre più su un progetto luminoso piuttosto che sull'estetica del corpo illuminante fine a se stesso, ha indirizzato l'evoluzione illuminotecnica sempre più verso progetti di illuminazione realizzati su misura, atti a valorizzare gli ambienti architettonici, rendendo i corpi illuminanti degli strumenti discreti, al servizio del progetto architettonico, ancora protagonisti del design innovativo ma amalgamati al progetto come corpo illuminante e non più come oggetto luminoso.

Questa fase evolutiva ci ha spinto ad ampliare la divisione Project ed Illuminotecnica della nostra azienda, divisione che si dedica ai progetti su misura.

La nostra divisione Project ed Illuminotecnica esegue già servizio di progettazione, realizzazione prototipi, test e controllo produzione durante la fabbricazione di ogni prodotto presente nel nostro catalogo.

Quando i nostri prodotti non incontrano le esigenze del cliente, ci occupiamo della realizzazione di prodotti "customizzati" partendo dalla ricerca dei materiali giusti, del LED più idoneo allo spettro estetico e normativo richiesto, e dell'elettronica di controllo più adeguata. Ogni customizzazione su misura viene curata nei minimi dettagli per essere adeguata alle esigenze specifiche del progetto e per valorizzare al massimo gli ambienti del disegno illuminotecnico, in modo che ogni architettura sia messa in risalto da un efficace dialogo tra estetica e tecnica.

Grazie a strumenti informatici e software di calcolo fotometrico siamo in grado di fornire per ogni nuovo prodotto i calcoli fotometrici per un adeguato sviluppo progettuale illuminotecnico.

The stylistic and technological evolution of lighting focused more and more on a lighting project rather than on the aesthetics of the lighting body itself, has increasingly directed the evolution of lighting technology towards tailor-made lighting projects, aimed at enhancing the environments architectural, turning the lighting bodies in discreet lighting instruments, at the service of the architectural project, still protagonists of the innovative design but amalgamated with the project as a lighting body and no longer as a luminous object.

This evolutionary phase prompted us to expand the Project and Lighting Engineering division of our company, a division dedicated to tailor-made projects.

Our Project and Lighting Engineering division already carries out design, prototype, test and production control services during the manufacture of each product on our catalogue.

When our products do not meet the customer's needs, we take care of the creation of "customized" products starting from the research for the right materials, the most suitable LED for the aesthetic and regulatory spectrum required, and the most suitable control system electronics. Each custom-made customization is taken with the highest care till the smallest detail to be appropriate to the specific needs of the project and to make the best lighting design environments, so that each architecture is highlighted by an effective dialogue between aesthetics and technique.

Thanks to highly professional devices and photometric calculation software we are able to provide photometric calculations for each new product for adequate lighting design development and project calculation.


EASY DOMOTICA

Easy domotica Easy Home Automation

Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica.

Questa sezione raggruppa prodotti a bassa tensione che è possibile collegare con alimentatori a tensione costante in parallelo e si caratterizzano per la estrema flessibilità e modularità essendo essi compatibili con centraline di controllo in Radio Frequenza 2,4G, Infrarossi, Wifi o Bluetooth. Le centraline a loro volta prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

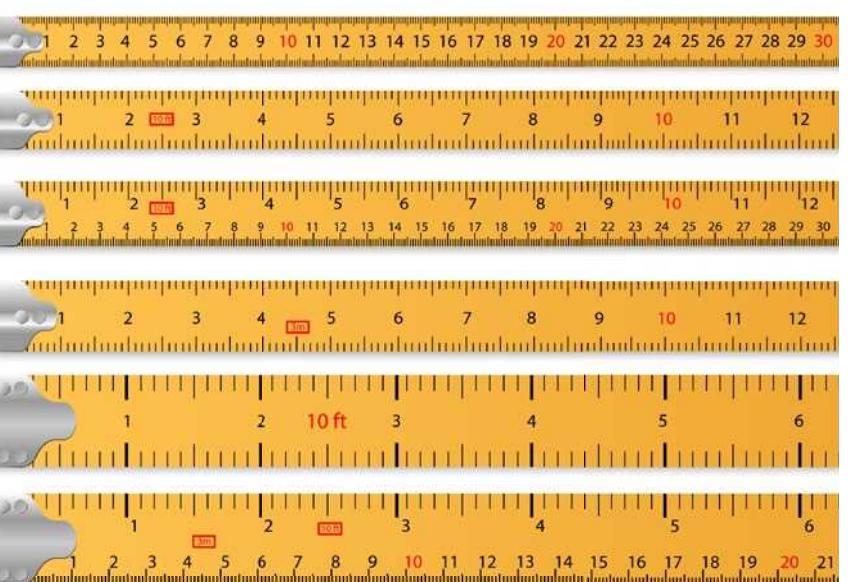

App Intec



Good solution for your Smart life!

Ogni momento della vita quotidiana richiede la giusta luce.

Grazie all'illuminazione Smart, creare l'atmosfera ideale per tutti i momenti sarà possibile con i nostri prodotti Wi-Fi e Bluetooth.

Tramite la nostra app Smart INTEC è possibile comandare da remoto tutti gli apparecchi luminosi per accendere o spegnere, cambiare temperatura colore Kelvin della luce e anche impostare scene. Tra i nostri articoli troverai una selezione di prodotti a LED integrato pronti all'installazione ma anche tutti gli accessori necessari per rendere smart qualunque apparecchio domestico e non. Una volta collegata e scaricata l'app INTEC, la creazione delle varie stanze sarà semplice e intuitivo grazie alle istruzioni step by step.

Per controllare i nostri prodotti smart è possibile anche utilizzare gli smart speaker e video Amazon e Google. Abilita la skill e controlla i dispositivi semplicemente parlando.

Every moment of everyday life require the right light.

Thank to the Smart lighting it will be possible to create the ideal atmosphere connecting them and controlling them thorough Wi-fi or Bluetooth connection.

With our APP Smart Intec it is possible to control from remote all the lighting devices with on-off, kelvin colour temperature changing, light colour and scenes functions.

To instore some smart lamps it is necessary just your standard home electric connection, and wifi connection.

Once connected the lamp and downloaded the APP Smart Intec it will be very easy to create groups and rooms in very easy process thank to the instructions step by step on the App.

The smart lamps can be controlled also with Wifi voice control devices.



SMART INTEC Bluetooth Sig mesh



La rete Bluetooth è stata ben accolta nell'illuminazione industriale, commerciale e domestica, in quanto uno dei sistemi di controllo dell'illuminazione intelligenti più semplici e convenienti che svolge un ruolo chiave nel facilitare l'inter-dialogo tra i dispositivi di illuminazione. I nostri articoli Bluetooth Sig Mesh possono essere collegati con i dispositivi intelligenti tramite l'APP Smart Intec e ogni dispositivo di illuminazione può comunicare con un altro numero infinito di dispositivi attraverso la rete mesh entro una distanza di 15m per ogni dispositivo.

La rete Mesh Bluetooth può essere controllata da remoto tramite Wifi grazie alla connessione del gateway Bluetooth il quale a sua volta può connettersi ai dispositivi voice control Alexa e Google.

Per tutti gli utenti, i prodotti mesh Bluetooth sono anche comodi da usare. Abilitata da una rete di dispositivi su larga scala e in grado di sfruttare il basso consumo energetico, una rete mesh Bluetooth può supportare migliaia di dispositivi che lavorano contemporaneamente. Quindi, non importa se sei a casa o in ufficio, puoi sempre eseguire un gran numero di dispositivi intelligenti connessi allo stesso tempo. Di conseguenza, i prodotti Bluetooth mesh smart forniscono una gamma completa di comodità per vivere e lavorare senza preoccuparsi degli alti costi energetici. Nella casa intelligente, il Bluetooth abbassa la soglia di utilizzo dei dispositivi domestici intelligenti con il suo basso consumo energetico, l'elevata compatibilità e le caratteristiche di alta sicurezza, fornitorgli un'esperienza domestica più economica, più user-friendly e più intelligente. Senza l'autorizzazione dell'utente, il segnale Bluetooth non sarà in grado di connettersi e tracciare il dispositivo, proteggendo la privacy dell'utente.

Bluetooht mesh has been well received across the industrial, commercial and domestic lighting, as one of the easiest and much convenient smart lighting control systems playing a key role in facilitating the inter-dialogue between lighting devices.


Our Bluetooth mesh items can be connected with the smart devices through the APP Smart Intec and each lighting device can communicate with other infinite number of devices through the mesh network with all other devices within a distance of 15m.

The Bluetooth mesh network can be controlled from remote area through Wifi thank to the connection of Bluetooth gateway that can connect in turn to Alexa and Google voice controls.

For individual users, Bluetooth mesh products are also convenient to use. Enabled by a large-scale device network and able to take advantage of low power consumption, a Bluetooth mesh network can support thousands of devices working simultaneously. So, no matter if you are at home or in the office, you can always run a large number of connected smart devices at the same time. As a result, Bluetooth mesh smart products provide a full range of conveniences for living and working without worrying about high energy costs.

In the smart home, Bluetooth lowers the threshold of using smart home devices with its low power consumption, high compatibility, and high-security characteristics, providing a lower cost, more user-friendly, and smarter home experience. Without the user's permission, the Bluetooth signal will not be able to connect and track any device, protecting the user's privacy.



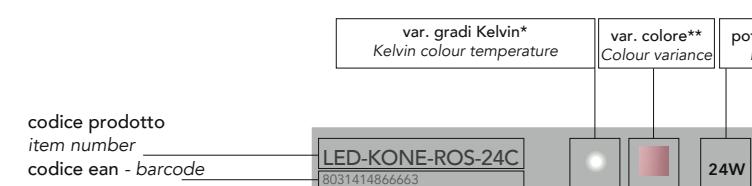

Destinazione d'uso / Intended use


Ogni collezione sarà accompagnata da uno o più simboli per precisare la destinazione d'uso del prodotto
Every collection will be distinguished by a symbol for intended use




Legenda simboli / Legend of symbols



Temperatura colore LED espressa in Kelvin (K)
Colour temperature in Kelvin

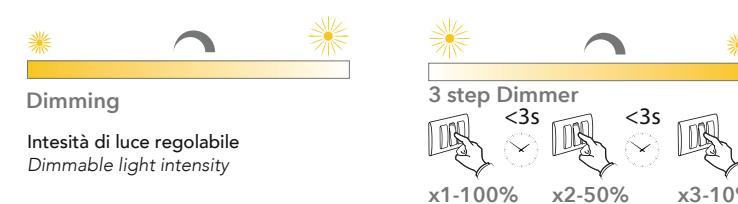

Caratteristiche prodotto / Product features

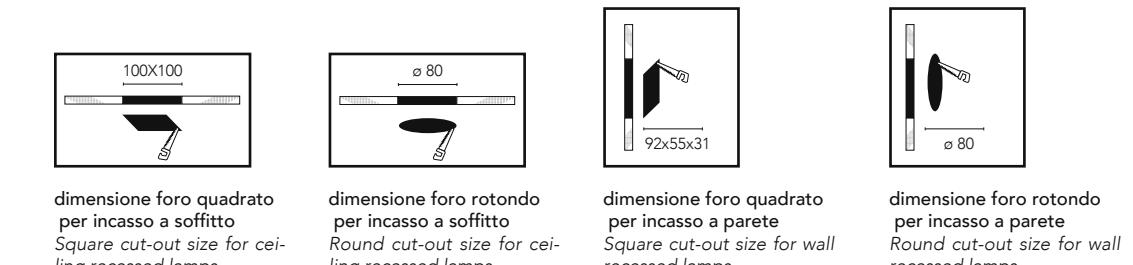

Prodotto UGR
unified glare rating

Sistema di illuminazione UGR

UGR è un indice unificato in campo internazionale, sviluppato dalla CIE (commission international de l'Enclairage), per la valutazione dell'abbagliamento diretto derivante dall'impianto di illuminazione. La norma europea per l'illuminazione dei posti di lavoro in interni **UNI-EN 12464-1** richiede un valore UGR specifico per ogni applicazione, compreso tra **10 e 30**:
più basso è il valore, minore è l'abbagliamento

Unified glare rating

UGR is an international unified data, developed by CIE (commission international de l'Enclairage) for the evaluation of the glancing degree of the light sources. The European norme for the lighting of te specific working place **UNI-EN 12464-1** requires a value UGR for every application, included between 10 and 30: lower is the value, lower is the anti glare ratee.

CLASSE IP - IP CLASS



Tutti i prodotti presenti nel catalogo senza specifica grado IP si intendono IP20.
All items in the catalogue without IP rating specific are IP20.



Potezione da corpi solidi
Protection against solid bodies



Potezione da liquidi
Protection against liquids

0	Nessuna protezione No protection
1	Protetto contro corpi solidi di dimensioni superiori a 50 mm Protected against solid bodies larger than 50mm
2	Protetto contro corpi solidi di dimensioni superiori a 12 mm Protected against solid bodies larger than 12 mm
3	Protetto contro corpi solidi di dimensioni superiori a 2,5 mm Protected against solid bodies larger than 2,5 mm
4	Protetto contro corpi solidi di dimensioni superiori a 1 mm Protected against solid bodies larger than 1 mm
5	Protetto dalla polvere senza deposito dannoso Protected against dust no harmful deposit
6	Completamente protetto dalla polvere Completely protected against dust

0	Nessuna protezione - No protection
1	Protetto contro le gocce d'acqua a caduta verticale Protected against vertically-falling drops of water
2	Protetto contro le gocce d'acqua che cadono fino a 15 ° dalla verticale Protected against drops of water falling at up to 15° from the vertical
3	Protetto contro le gocce d'acqua che cadono fino a 60 ° dalla verticale Protected against drops of water falling at up to 60° from the vertical
4	Protetto contro le gocce d'acqua da tutte le direzioni Protected against projections of water from all directions
5	Protetto da getti d'acqua da tutte le direzioni Protected against jets of water from all directions
6	Protetto da getti d'acqua con una forte forza d'impatto Protected against jets of water of similar force heavy seas
7	Protetto dagli effetti dell' immersione Protected against the effects of immersion
8	Protetto contro gli effetti prolungati dell'immersione sotto pressione Protected against pro-longed the effects of immersion under pressure

CLASSE IK - IK CLASS

Gradi di protezione degli involucri per apparecchiature elettriche contro impatti meccanici esterni
Degrees of protection for enclosures for electrical equipment against external mechanical impacts

IK	Energia d'impatto (in Joules) Impact energy (in Joules)
00	0
01	0,15
02	0,2
03	0,35
04	0,5
05	0,7
06	1
07	2
08	5
09	10
10	20

CLASSE ISOLAMENTO ELETTRICO - APPLIANCE CLASS

Le classi di isolamento elettrico sono il raggruppamento omogeneo definito dall'IEC (International Electrotechnical Commission) delle caratteristiche tecniche applicabili ad un dispositivo elettrico per limitare i rischi di folgorazione conseguenti ad un guasto dello stesso.

The electrical insulation classes are the homogeneous grouping defined by the IEC (International Electrotechnical Commission) of the technical characteristics applicable to an electrical device to limit the risk of electrocution resulting from its failure.

I		Questi apparecchi devono avere il telaio collegato alla terra elettrica da un conduttore di terra separato These appliance must have their chassis connected to electrical earth by a separate earth conductor
II		Questi apparecchi sono progettati in modo da non richiedere la connessione delle messe a terra These appliance are designed in such a way that it does not require a safety connection to electrical earth
III		Questi apparecchi sono progettati per essere alimentati da una fonte di alimentazione a bassissima tensione separata / di sicurezza These appliance are designed to be supplied from a separated/safety extra-low voltage power source

CERTIFICAZIONE E NORMATIVE - NORMS AND CERTIFICATIONS

Tutti i nostri prodotti sono certificati e conformi alle normative vigenti nella comunità Europea.
All our products comply with CE norms and current European standards




SISTEMA BINARI / TRACK LIGHT	26	APPLIQUE PER ESTERNI / OUTDOOR WALL LAMP	322
INCASSI / RECESSED LAMP	56	PLAFONIERE PER ESTERNI / OUTDOOR CEILING LAMP	378
SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE / MULTI-FUNCTION LIGHTING SYSTEM	138	APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SOSPENSION AND FLOOR LAMP COMBINED	394
APPLIQUE E PLAFONIERE/ WALL LAMP AND CEILING LAMP	158	INCASSI E SEGNAPASSI PER ESTERNI / OUTDOOR INGROUND AND WALK LIGHT	454
SPOT E FARETTI/ SPOT LIGHT	250	SOLARI / SOLAR LAMP	478
SOTTOPENSILI E BARRE LED / CABINET AND LEDBAR	269	PROIETTORI / FLOOD LIGHT	488
PROFILI E STRIP LED / PROFILE AND STRIP LED	286	STRADALI / STREET LIGHT	516
LAMPADE D'EMERGENZA / EMERGENCY LAMP	316	HIGH BAY E TRI-PROOF / HIGH BAY AND TRI-PROOF	526
		DECO LIGHT 24V	540
		LUCI DECORATIVE TECNICHE / TECHNICAL DECORATION LIGHTING	548
		COMPONENTISTICA / LIGHTING COMPONENTS	566


SISTEMA BINARI / TRACK LIGHT



INCASSI

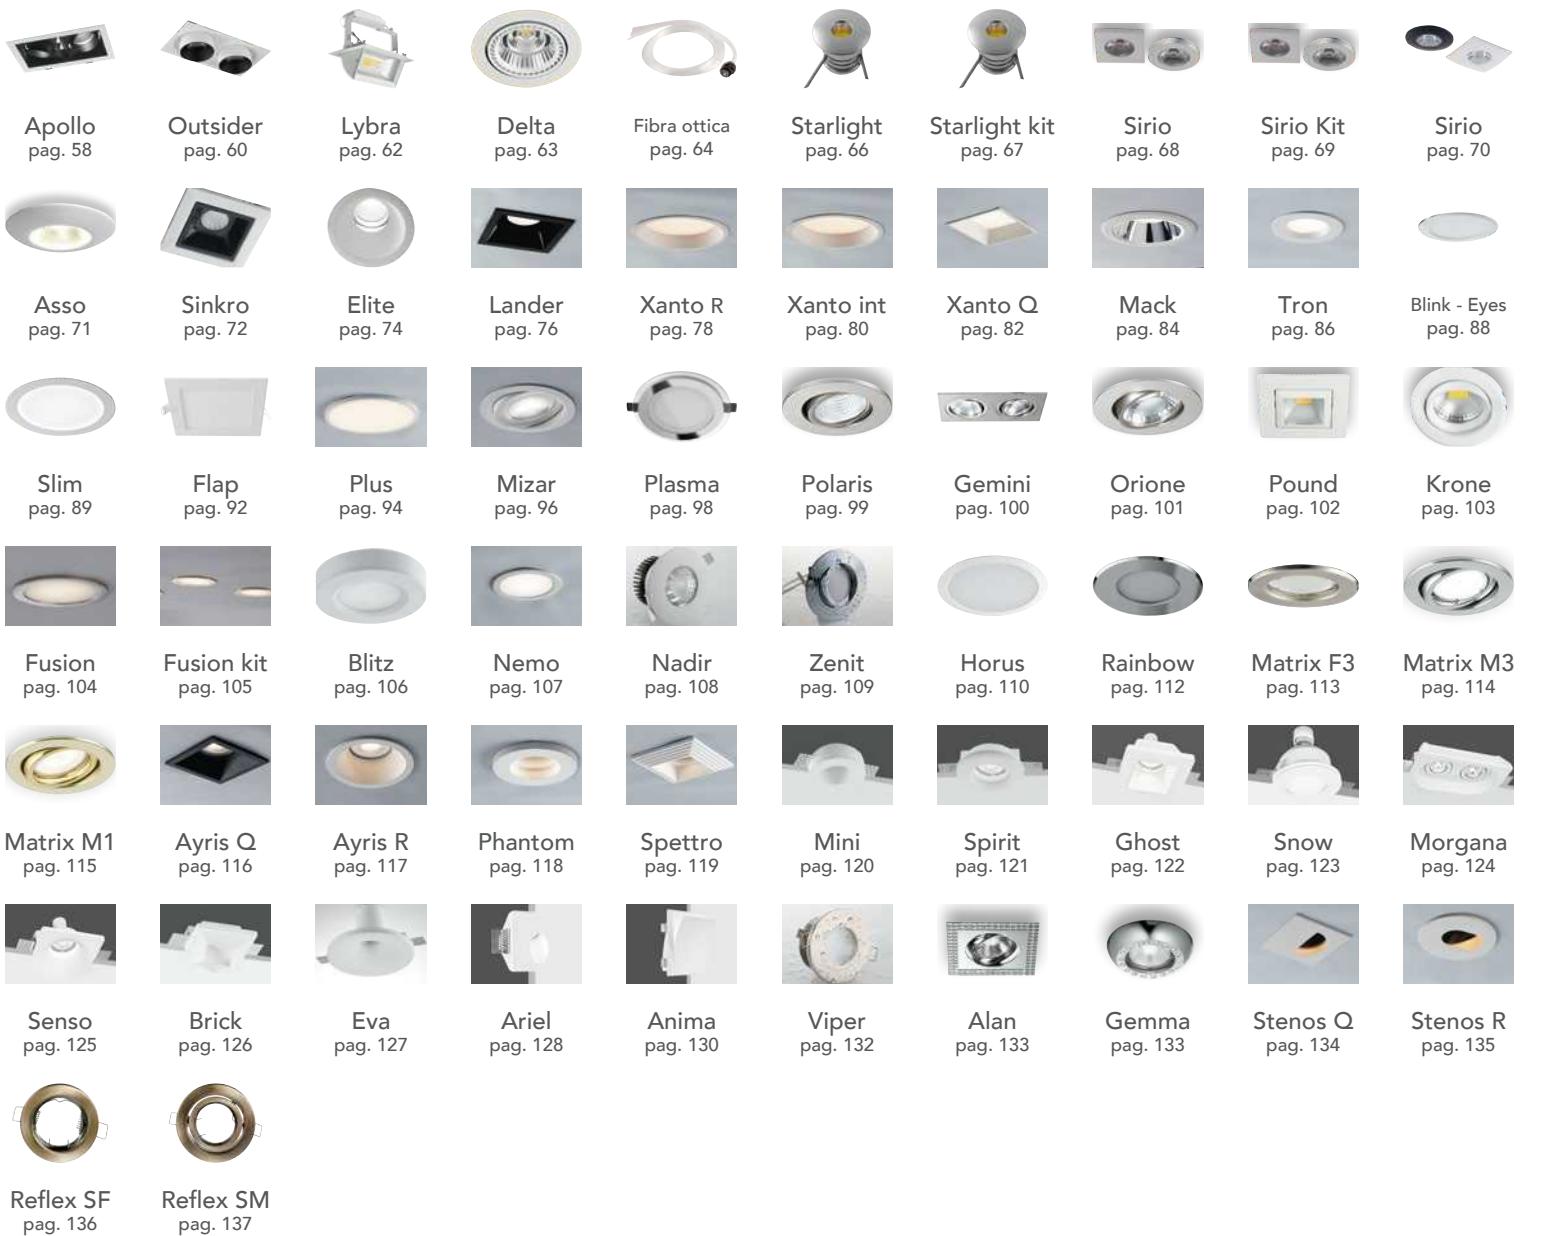

SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE / MULTI-FUNCTION LIGHTING SYSTEM

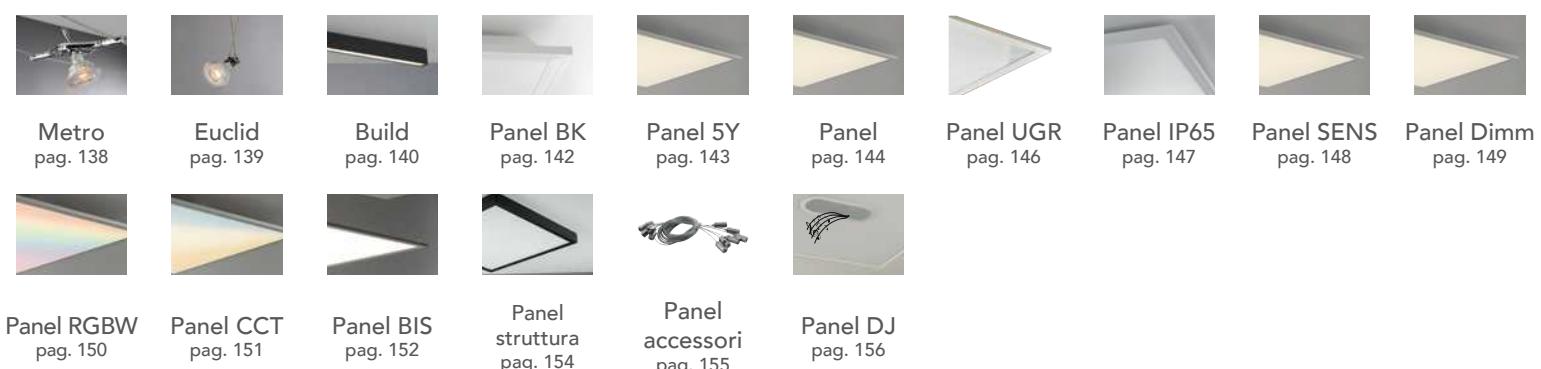

APPLIQUE E PLAFONIERE/ WALL LAMP AND CEILING LAMP




SPOT E FARETTI/ SPOT LIGHT


Zero
pag. 250 **Punto**
pag. 252 **Tecnico**
pag. 254 **Techno nik**
pag. 256 **Sunny**
pag. 258 **Miami**
pag. 260 **Cooper**
pag. 262 **Cadillac**
pag. 264 **Mito**
pag. 265 **Carrera**
pag. 266

Double U
pag. 267



Compass
pag. 322 **Compact**
pag. 324 **Detroit**
pag. 325 **Amon**
pag. 326 **Stealth**
pag. 328 **Mercury**
pag. 330 **Gamma**
pag. 331 **Miura**
pag. 332 **Tunnel**
pag. 333 **Biome**
pag. 334

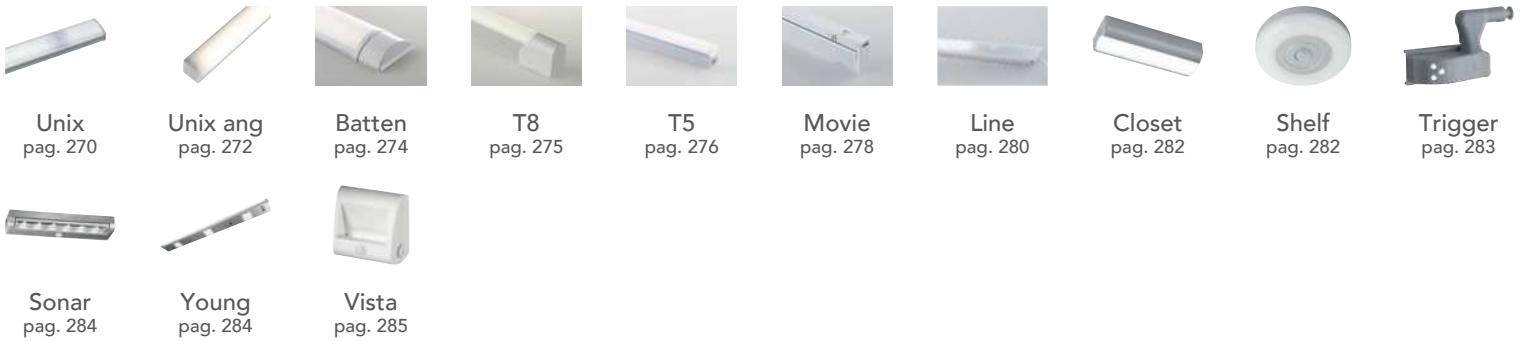SOTTOPENSILI E BARRE LED / CABINET AND LEDBAR


Unix
pag. 270 **Unix ang**
pag. 272 **Batten**
pag. 274 **T8**
pag. 275 **T5**
pag. 276 **Movie**
pag. 278 **Line**
pag. 280 **Closet**
pag. 282 **Shelf**
pag. 282 **Trigger**
pag. 283

Sonar
pag. 284 **Young**
pag. 284 **Vista**
pag. 285



Alfa
pag. 350 **Delta**
pag. 352 **Beta**
pag. 354 **Ghibli**
pag. 355 **Parker gr**
pag. 356 **Parker bco**
pag. 358 **Portland**
pag. 360 **Oakland**
pag. 360 **Jump**
pag. 361 **One**
pag. 362

Qubo
pag. 364 **Tucson**
pag. 366 **Huracan**
pag. 368 **Seattle**
pag. 369 **Austin**
pag. 370 **Boston**
pag. 372 **Memphis**
pag. 372 **Atlanta**
pag. 373 **Denver**
pag. 373 **Mondrian**
pag. 374

PROFILI E STRIP LED / PROFILE AND STRIP LED


Profilo strip
pag. 286 **Sensori strip**
pag. 289 **Strip CC30**
pag. 290 **Strip CC15**
pag. 291 **Strip 2835 240**
pag. 292 **Strip 2835 120**
pag. 293 **Strip 2835 60**
pag. 294 **Strip 5050 RGB**
pag. 295 **Strip 2835 3D**
pag. 296 **Strip 5050 3D**
pag. 297

Strip 5050 60
pag. 298 **Strip 5050 RGBW**
pag. 300 **Strip 5050 RGB CCT**
pag. 301 **Strip 2835 CCT**
pag. 302 **Strip 2835 KIT**
pag. 303 **Strip 2838**
pag. 304 **Strip 5050 RGB KIT**
pag. 305 **Strip 2835 IP67 60**
pag. 306 **Strip 5050 IP67 60**
pag. 307 **Strip 5050 IP67 RGB**
pag. 308

Strip 5050 IP68 RGBW
pag. 309 **Neon Flex**
pag. 310 **Insign lens**
pag. 312 **Insign RGBW**
pag. 313 **Insign F**
pag. 313 **Taylor**
pag. 314 **Strip surround**
pag. 315



Zoom
pag. 378 **Tutor**
pag. 380 **Vertigo**
pag. 381 **Extra**
pag. 382 **Sensitive**
pag. 383 **Shelly Q MW**
pag. 384 **Shelly Q**
pag. 385 **Shelly**
pag. 386 **Ever Q**
pag. 387 **Ever R**
pag. 388

Ever XL
pag. 389 **Ever XL MW**
pag. 390 **Ever XLP**
pag. 391 **Picnic**
pag. 392

LAMPADE D'EMERGENZA / EMERGENCY LAMP




Eterna
pag. 316 **Help exit**
pag. 318 **Bolt Help**
pag. 319 **Help 503**
pag. 320 **Help 511**
pag. 321

PLAFONIERE PER ESTERNI / OUTDOOR CEILING LAMP

OUTDOOR


OUTDOOR

APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMP COMBINED

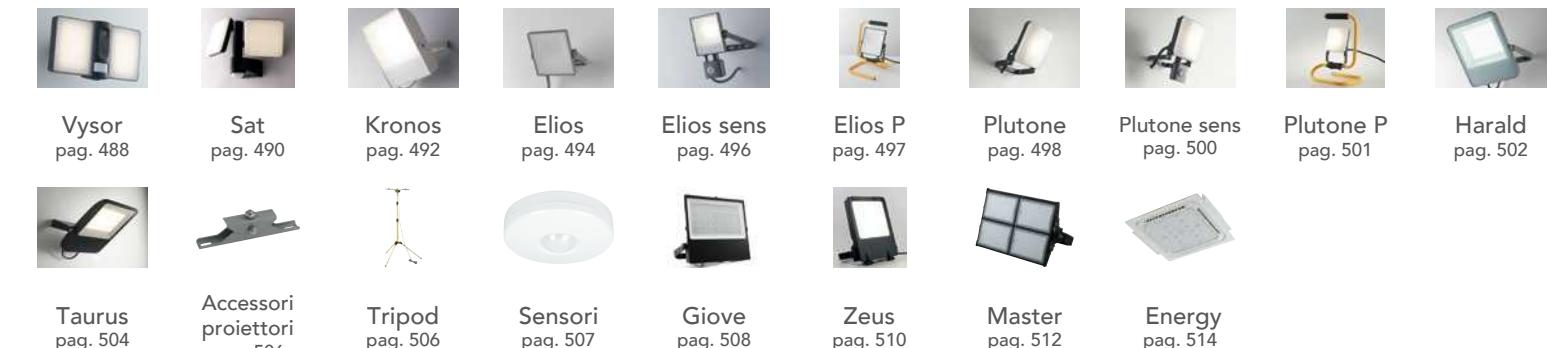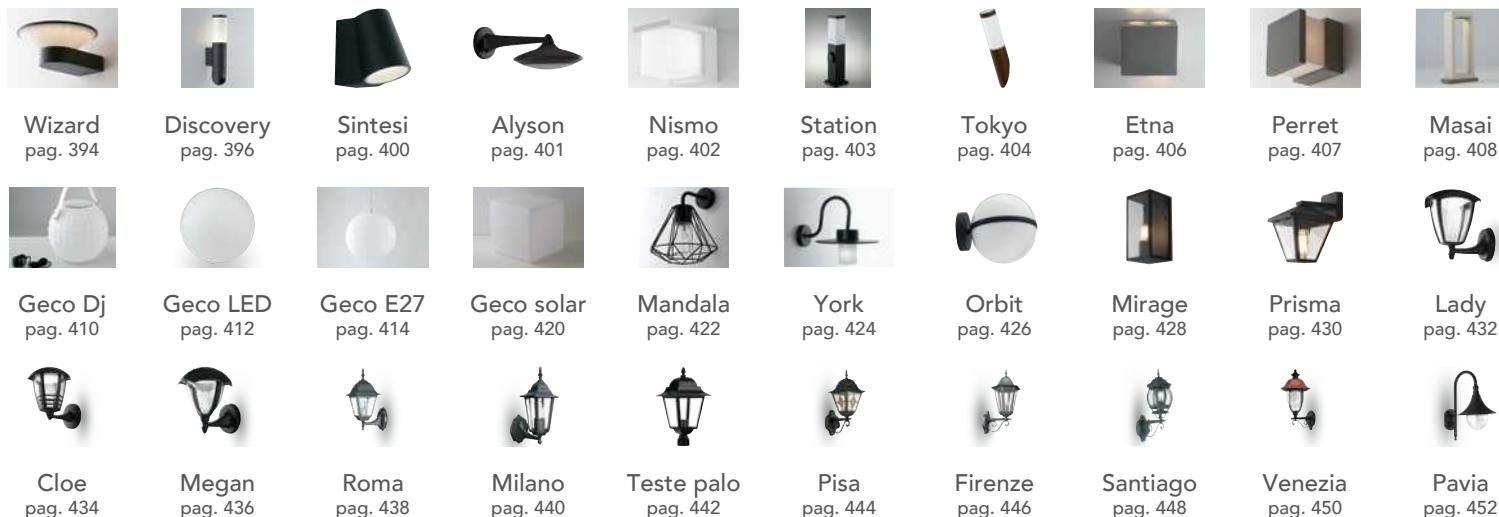

PROIETTORI / FLOOD LIGHT



INCASSI E SEGNAPASSI PER ESTERNI / OUTDOOR INGROUND AND WALK LIGHT

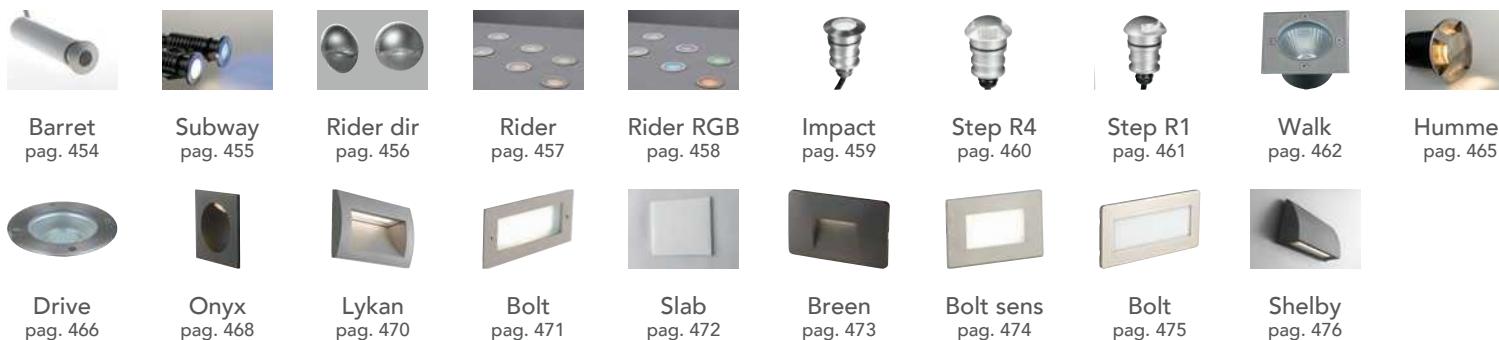

STRADALI / STREET LIGHT

INDUSTRIAL

SOLARI / SOLAR LAMP

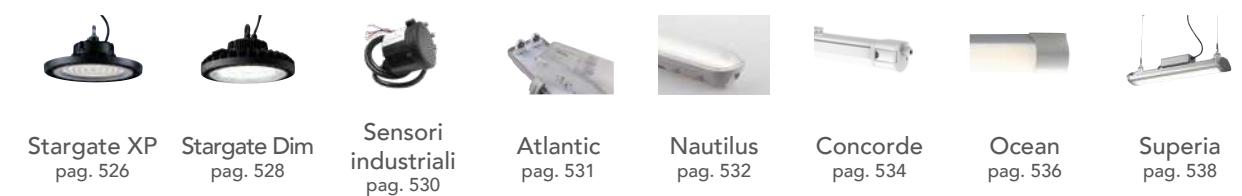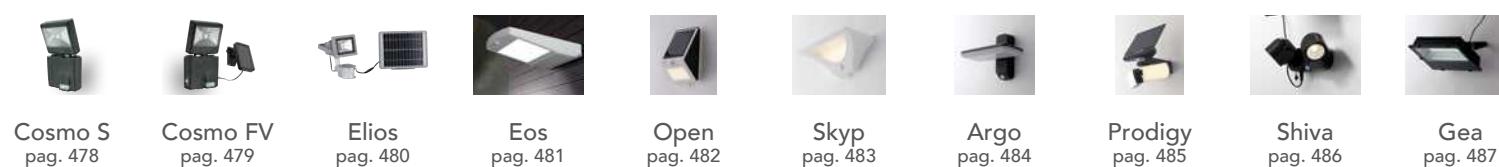

HIGH BAY E TRI-PROOF / HIGH BAY AND TRI-PROOF


Accessori
pag. 540

Xanto RF
pag. 541

Panel 24V
pag. 542

**Strip 5050
RGBW**
pag. 543

**Strip 5050
RGBW IP68**
pag. 544

Target
pag. 545

Sprint
pag. 546

Runner
pag. 547

Driver
pag. 567

Controller
pag. 574

Clay
pag. 576

**Porta
lampade**
pag. 578

Adattatori
pag. 580

Power
pag. 582

**Dispositivi
Wi-Fi**
pag. 583

LUCI DECORATIVE TECNICHE / TECHNICAL DECORATION LIGHTING

Rays
pag. 548

Wallwasher
pag. 550

Iride
pag. 552

Iride inc
pag. 554

Neptune

Crown
pag. 557

Trevis
pag. 558

Par 56
pag. 560

Pelps
pag. 561

Controller
pag. 562

Xanto int
pag. 80

Slim
pag. 89

Borea
pag. 226

Skyron
pag. 227

Aliseo
pag. 228

Foehn
pag. 229

Moon INT
pag. 232

Compass
pag. 322

Splitter
pag. 563

Sunlite
pag. 564

Accessori
pag. 566

Zoom
pag. 378

Tutor
pag. 380

Wizard
pag. 394

Discovery
pag. 396

Kone BT
pag. 39

Blink - Eyes
pag. 88

Harald
pag. 502

Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO
Abel	202	Binari e accessori davinci	34	Dado	247	Foehn	229	Joy	245
Accessori deco24v	540	Binari e accessori track	50	Delta	352	Foster	170	Jump	361
Accessori domotica	566	Biome	334	Delta inc	63	Fusion	104	Kite	221
Accessori proiettori	506	Blaster	236	Denver	373	Fusion kit	105	Klio q	158
Action	42	Blink - eyes	88	Detroit	325	Gabriel	176	Klio r	160
Adattatori	580	Blitz	106	Dezir	344	Gaeta	375	Kone	40
Agera	342	Bolt	471	Discovery	396	Gaia	247	Kone bt	39
Aileron	212	Bolt help	319	Dispositivi wi-fi	583	Gamma	331	Krone	103
Akron	376	Bolt 503 - 506	475	Domo	234	Gatsby	198	Kronos	492
Alan	133	Bolt sens	474	Double u	267	Gea	487	Lady	432
Alcor	219	Borea	226	Drive	466	Geco dj	410	Lambda	218
Alfa	350	Boston	372	Driver	567	Geco e27	414	Lancer	238
Aliseo	228	Boxter	346	Elios solar	480	Geco led	412	Lander	76
Alma	210	Breen	473	Elios	494	Geco solar	420	Leiron	182
Alyson	401	Brick	126	Elios p	497	Gemini	100	Line	280
Amon	326	Build	140	Elios sens	496	Gemma	133	Line davinci	30
Andromeda	216	Cadillac	264	Elite	74	Gibli	355	Livigno	208
Anima	130	Candida	196	Endy	245	Ghost	122	Living	174
Antares	214	Carrera	266	Energy	514	Giove	508	Luxon	340
Apollo	58	Cervinia	186	Eos	481	Golf	336	Lybra	67
Aqa	243	Clay	576	Eterna	316	Grado	220	Lykan	470
Argo	484	Clock	47	Etna	406	Harald	502	Mack	84
Ariel	128	Cloe	434	Euclid	139	Help 503	320	Mandala	422
Asso	71	Closet	282	Eva	127	Help 511	321	Masai	408
Astron	185	Compact	324	Ever xl	391	Help exit	318	Master	512
Atlanta	373	Compass	322	Ever q	387	Highway	522	Matrix f3	113
Atlantic	531	Concorde	534	Ever r	388	Horus	110	Matrix m1	115
Atlas	217	Controller	562	Ever xl	389	Hummer	465	Matrix m3	114
Austin	370	Controller pool	563	Ever xl mw	390	Huracan	368	Megan	436
Ayris q	116	Controller wi-fi	574	Express	48	Impact	459	Memphis	372
Ayris r	117	Cooper	262	Extra	382	Insign lens	312	Mercury	330
Banjie	166	Cortina	194	F1	248	Insign rgbw + f	313	Metro	138
Barret	454	Cosmo fv	479	Febo	519	Invictus	517	Miami	260
Batten	274	Cosmo s	478	Fibra ottica	64	Iperion	518	Mig	162
Beetle	348	Crown	557	Firenze	446	Iride	552	Milano	440
Beta	354	Cruise	241	Flap	92	Iride inc	554	Mini	167


Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO	Articolo	PAGINA CATALOGO
Mirage	428	Panel accessori	155	Qubo	364	Shine	184	Strip 2835 60	294
Mito	265	Panel bis	152	Rain	233	Shiva	486	Strip 2835 cct	302
Miura	332	Panel bk	142	Rainbow	112	Sigma	216	Strip 2835 ip67 60	306
Mizar	96	Panel cct	151	Ray	337	Sinkro	72	Strip 2835 kit	303
Mondrian	374	Panel dj	156	Rays	548	Sintesi	400	Strip 3838 168 rgb	304
Montblanc	183	Panel ip65	147	Reflex Sf	136	Sirio	68	Strip 5050 3d	297
Moon	230	Panel 24V	542	Reflex Sm	137	Sirio bco ner	70	Strip 5050 60	298
Moon int	232	Panel rgbw	150	Rider	457	Sirio kit	69	Strip 5050 IP67 60	307
Morgana	124	Panel sens	148	Rider rgb	458	Skyp	483	Strip 5050 IP67 rgb	308
Moritz	204	Panel ugr	146	Riva	241	Skyron	227	Strip 5050 rgb	295
Moses	190	Panel struttura	154	Roby	246	Slab	472	Strip 5050 rgb kit	305
Motion	516	Par 56	560	Rock	178	Slide	32	Strip 5050 rgbw	300
Movie	278	Parker bco	358	Rocket	44	Slim	89	Strip 5050 rgbw	543
Mustang	222	Parker gr	356	Rocket ap	45	Snow	123	Strip 5050 rgbw IP68	309
Mykonos	201	Pavia	452	Rider dir	456	Sonar	284	Strip 5050 rgbw IP68	544
Nadir	108	Pelps	561	Roma	438	Space	165	Strip 5050 rgb cct	301
Nautilus	532	Perret	407	Rubik	188	Space s	164	Strip cc15	291
Nemo	167	Phantom	167	Runner	547	Spettro	119	Strip cc30	290
Neon flex	310	Picnic	392	Sacs	240	Spirit	121	Strip surround	315
Neptune	556	Piroette	192	Santiago	448	Splitter	563	Subway	455
Nismo	402	Pisa	444	Santorini	200	Sprint	546	Sunlite	564
Oakland	360	Plus	94	Sat	490	Stargate xp	526	Sunny	258
Oboe	46	Plutone	498	Scarab	242	Stargate dim	528	Superia	538
Ocean	536	Plutone p	501	Scott	187	Starlight	66	T5	276
Omega	217	Plutone sens	500	Seattle	369	Starlight kit	67	T8	275
Omnia	225	Polaris	99	Sensitive	383	Station	403	Target	545
One	362	Polis	524	Senso	125	Stealth	328	Taurus	504
Onyx	468	Portalampade	578	Sensori	507	Stenos q	134	Taylor	314
Open	482	Portland	360	Sensori industriali	530	Stenos r	135	Techno	254
Orbit	426	Pound	102	Sensori strip	289	Step r1	461	Techno nik	256
Orione	101	Power	582	Sestriere	203	Step r4	460	Tema	29
Ortisei	180	Prisma	430	Shelby	476	Stone	199	Teste palo	442
Outsider	60	Prodigy	485	Shelf	282	Streetway	520	Tokyo	404
Panel	144	Profili strip	286	Shelly	386	Strip 2835 120	293	Town	163
Panel dimm	149	Punto	252	Shelly q	385	Strip 2835 240	292	Trevis	558
Panel 5y	143	Q1	249	Shelly q mw	384	Strip 2835 3d	296	Trigger	283

Articolo	PAGINA CATALOGO
Tripod	507
Tron	86
Tubo	33
Tucson	366
Tunnel	333
Tutor	380
Twilight	224
Twin	338
Unix	270
Unix ang	272
Venezia	450
Vertigo	381
Veyron	335
Viper	132
Vista	285
Vysor	488
Walk	462
Wallwasher	550
Wally	242
Wizard	394
Xanto int	80
Xanto q	82
Xanto r	78
Xanto rf	541
York	424
Young	284
Zenit	109
Zephyr	244
Zero	250
Zeus	510
Zonda	345
Zoom	378

iNTEC[®]
LIGHT

INTEC fa un salto nel futuro con il sistema Davinci, Sistema progettato per integrarsi totalmente con l'architettura degli ambienti. Esso può essere fissato al soffitto o alle pareti, Inserito nella muratura ad incasso a filo oppure nella versione a sospensione con luce bi-emissione.


Il binario Davinci è un binario completamente elettrificato a bassa tensione e si completa con elementi luminosi a LED inseribili semplicemente con un click, grazie all'incastro a sfere volventi, lungo tutto il percorso. Frutto della ricerca tecnologica più avanzata, il sistema consente di creare luce che scaturisce direttamente dalle pareti o dal soffitto, e gioca con gli spazi abitativi tracciando segni luminosi che variano a seconda della posizione del corpo illuminante, posizione che può essere modificata con la massima versatilità in ogni momento grazie al semplice inserimento dei corpi illuminanti all'interno del binario tramite il fluido sistema di innesti a sfere volventi. La diversificata gamma di corpi illuminanti Davinci, e la ampia scelta di forme, angoli e connessioni permettono la realizzazione di disegni illuminotecnici che esprimono la massima dinamicità e poliedricità delle personalizzazioni.

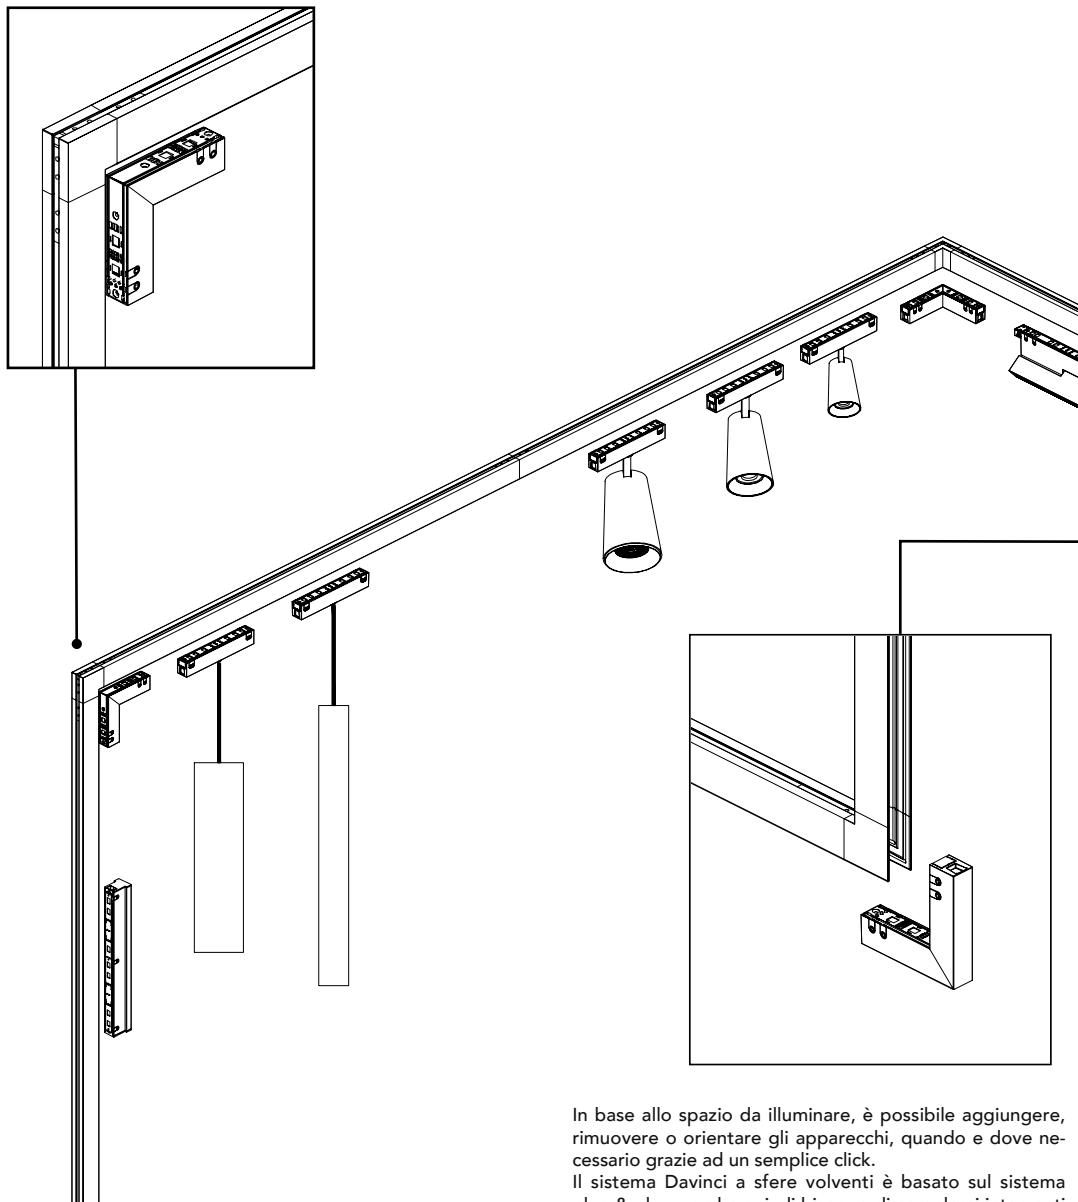


In base allo spazio da illuminare, è possibile aggiungere, rimuovere o orientare gli apparecchi, quando e dove necessario grazie ad un semplice click.
Il sistema Davinci a sfere volventi è basato sul sistema plug & play, non ha quindi bisogno di complessi interventi tecnici. Ogni corpo illuminante Davinci ha solo bisogno di essere posizionato, inserito ed acceso. All'interno del binario Davinci si può operare con inserimento di una vasta gamma di moduli di illuminazione decorativa sia con fari a spot orientabili, lampade sospese, che con lampade a led lineari fisse o movibili.

INTEC leap forward into the future with the Davinci system, System designed to fully integrate with the architecture environments. It can be fixed to the ceiling or to the walls, Inserted in the flush-mounted masonry or mounted in suspension version with single or bi-emission light.

Davinci track is a fully electrified low voltage track system and it is completed with LED light elements which can be inserted simply with a click, thanks to the joint a rolling spheres, all along the path. Fruit of most advanced technological research, the system allows you to create light that springs directly from the walls or ceiling, and plays with living spaces by drawing luminous signs that vary according to the position of the luminaire, position which can be modified with maximum versatility at any time thanks to the simple insertion of the LED luminous bodies inside the track by means of the fluid ball bearings. The diversified range of lighting fixtures Davinci, and the wide choice of shapes, angles and connections allow the creation of lighting designs which express the maximum dynamism and versatility of the customizations.



Depending on the space to be illuminated, it is possible to add, remove or orient the appliances when and where necessary thanks to a simple click.
The Davinci rolling ball system is based on the system plug & play, therefore it does not need complex interventions of technicians. Every Davinci luminaire just needs to be positioned, inserted and switched on.
Inside the track Davinci can be inserted a wide range of decorative lighting modules with headlights, adjustable spots, suspended lamps, and with LED linear lamps fixed or movable.

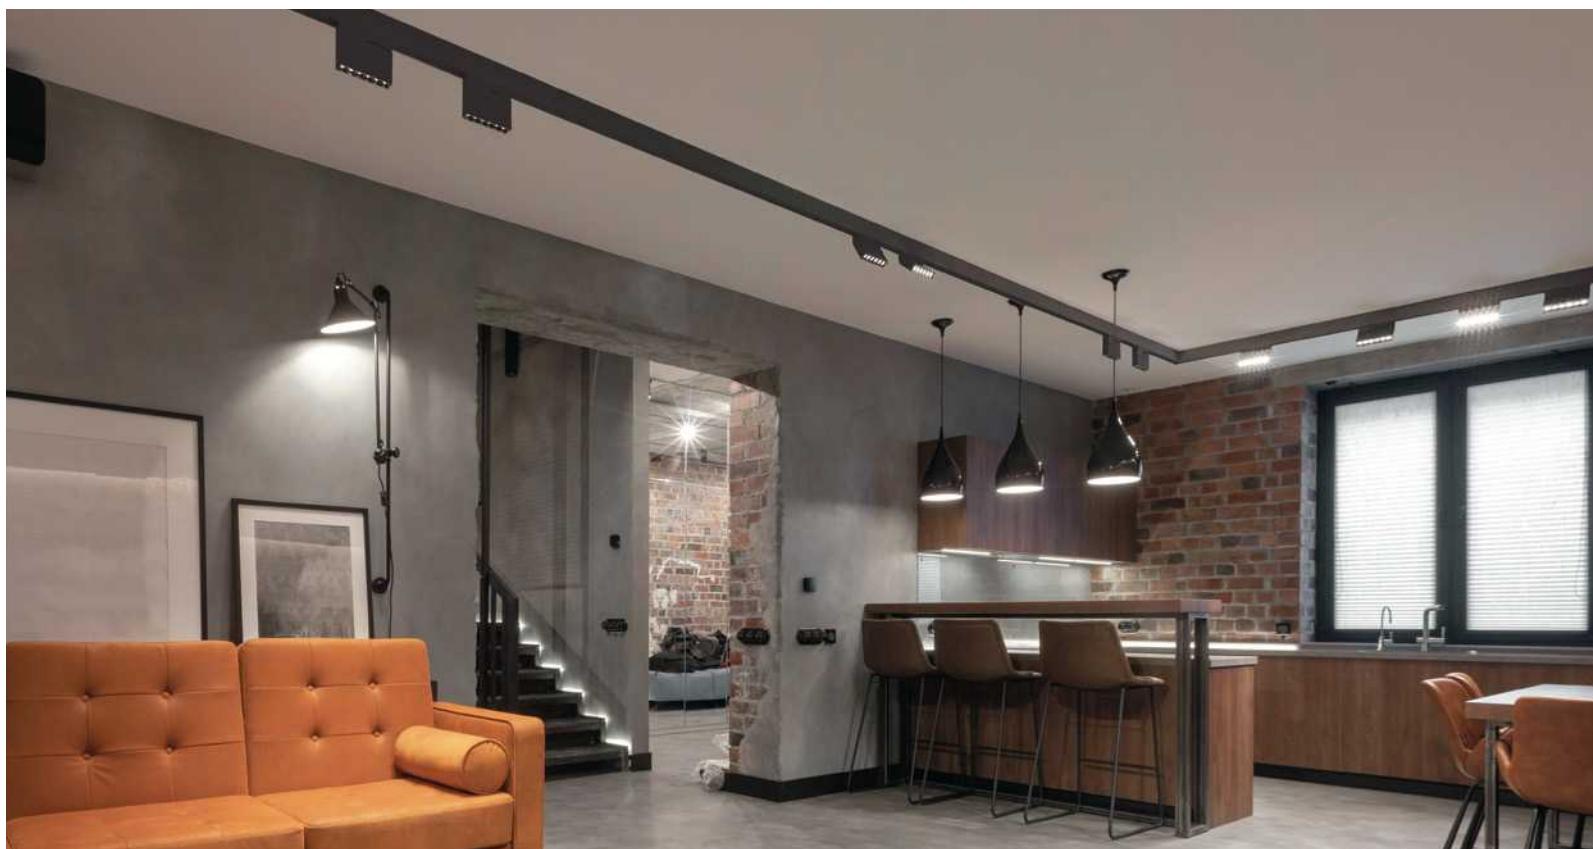

TEMA



Sfere volventi
Rolling spheres



Faro luce spot orientabile per sistema Davinci

Materiale

Corpo in alluminio pressofuso

Colore finitura

Nero matto

Sorgente luminosa

LED COB 5W - 10W - 20W - 30W

Driver

integrato

Temperatura colore

3000K - 4000K



Flusso luminoso

500 Lm - 1000 Lm - 2000 Lm - 3000 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

38°

CRI

>90



Spot orientabile track light for Davinci system

Material

Aluminum die cast body

Finiture colour

Matt black

Light source

LED COB 5W - 10W - 20W - 30W

Driver

built-in

Colour temperature

3000K - 4000K

Luminous flux

500 Lm - 1000 Lm - 2000 Lm - 3000 Lm

Life time and on/off

25.000 h ~ > 15.000 on/off

Beam angle

38°

CRI

>90




TEMA




DAVINCI-TEMA-10C 8031414876990 10W 1000 LM

DAVINCI-TEMA-10M 8031414878215 10W 1000 LM


Misure - Size
dimensioni in mm - size mm

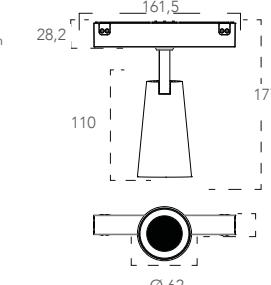

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT




FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

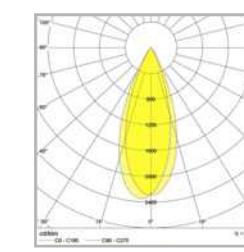


DAVINCI-TEMA-20C 8031414878222 20W 2000 LM

DAVINCI-TEMA-20M 8031414878239 20W 2000 LM

Misure - Size
dimensioni in mm - size mm

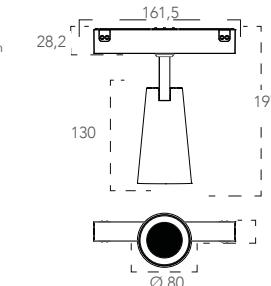


FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

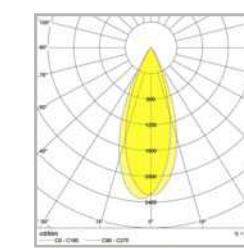


DAVINCI-TEMA-30C 8031414878246 30W 3000 LM

DAVINCI-TEMA-30M 8031414878253 30W 3000 LM

Misure - Size
dimensioni in mm - size mm

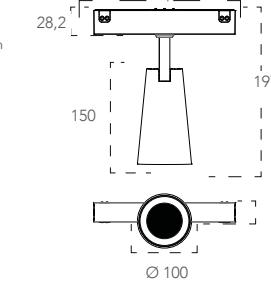

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

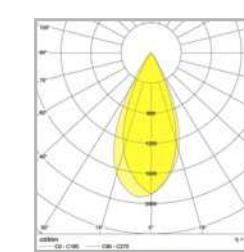


DAVINCI-TEMA-5C 8031414876976 5W 500 LM


DAVINCI-TEMA-5M 8031414876983 5W 500 LM

Misure - Size

dimensioni in mm - size mm

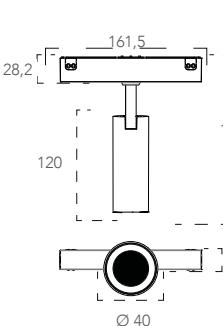

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

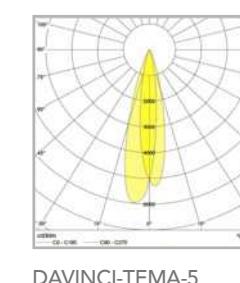

Retina antiabbagliamento
Anti glare retina

LED-KONE-MESH62	PER 10W
LED-KONE-MESH80	PER 20W
LED-KONE-MESH100	PER 30W



Deviatore Flusso luminoso
Luminous flux diverter

LED-KONE-DIFF62	PER 10W
LED-KONE-DIFF80	PER 20W
LED-KONE-DIFF100	PER 30W

ACCESSORI TEMA

LINE



Sfere volventi
Rolling spheres



Lampada lineare LED per sistema Davinci

Linear LED light for Davinci system

Materiale

Corpo in alluminio pressofuso

Material

Aluminum die cast body

Colore finitura

Nero matto

Finiture colour

Matt black

Sorgente luminosa

LED SMD 9W - 10W - 18W - 27W - 36W

Light source

LED SMD 9W - 10W - 18W - 27W - 36W

Driver

incluso

Driver

included

Temperatura colore

3000K - 4000K



Colour temperature

3000K - 4000K



Flusso luminoso

900 Lm - 1000 Lm - 1800 Lm - 2700 Lm - 3600 Lm

Luminous flux

900 Lm - 1000 Lm - 1800 Lm - 2700 Lm - 3600 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Life time and on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

30° - 110°

Beam angle

30° - 110°

CRI

>90



CRI

>90




LINE



DAVINCI-LINE30C 8031414878260 9W 900 LM 110°

DAVINCI-LINE30M 8031414878277 9W 900 LM 110°

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT




DAVINCI-LINE30



DAVINCI-LINE60C 8031414878284 18W 1800 LM 110°

DAVINCI-LINE60M 8031414878291 18W 1800 LM 110°

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT




DAVINCI-LINE60



DAVINCI-LINE90C 8031414878666 27W 2700 LM 110°

DAVINCI-LINE90M 8031414878635 27W 2700 LM 110°

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

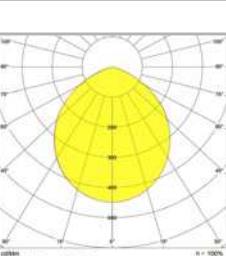


DAVINCI-LINE90



DAVINCI-LINE120C 8031414878642 36W 3600 LM 110°

DAVINCI-LINE120M 8031414878611 36W 3600 LM 110°

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

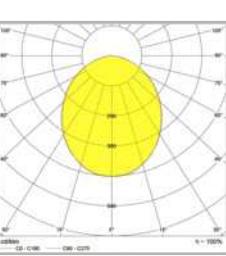

DAVINCI-LINE120

LINE



DAVINCI-LINE30C-UGR 8031414878321 10W 1000 LM 30°


DAVINCI-LINE30M-UGR 8031414878338 10W 1000 LM 30°

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

PHOTOMETRIC CURVE
OF THE PRODUCT

Misure - Size

dimensioni in mm - size mm

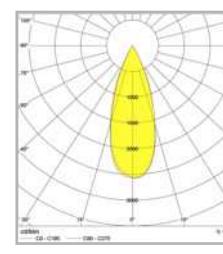


DAVINCI-LINE30 UGR



DAVINCI-LINE120C 8031414878642 36W 3600 LM 110°

DAVINCI-LINE120M 8031414878611 36W 3600 LM 110°

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

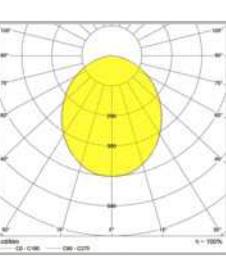

DAVINCI-LINE120

SLIDE



Lampada lineare orientabile LED per sistema Davinci Orientable linear LED light for Davinci system

Materiale

Corpo in alluminio pressofuso

Material

Aluminum die cast body

Colore finitura

Nero matto

Finiture colour

Matt black



Sfere volventi
Rolling spheres

Sorgente luminosa

LED SMD 9W

Light source

LED SMD 9W

Driver

incluso

Driver

included

Temperatura colore

3000K - 4000K

Colour temperature

3000K - 4000K

Flusso luminoso

900 Lm

Luminous flux

900 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Life time and on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

30° - 110°

Beam angle

30° - 110°

CRI

>90



CRI

>90



CLASSE A+ CE EMC □

TUBO



Lampada sospensione LED per sistema Davinci Suspension LED light for Davinci system

Materiale

Corpo in alluminio pressofuso

Material

Aluminum die cast body

Colore finitura

Nero matto

Finiture colour

Matt black

Sorgente luminosa

LED COB 3W - 5W

Light source

LED COB 3W - 5W

Driver

incluso

Driver

included

Temperatura colore

3000K - 4000K

Colour temperature

3000K - 4000K

Flusso luminoso

300 Lm - 500 Lm

Luminous flux

300 Lm - 500 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Life time and on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

38°

Beam angle

38°

CRI

>90



CRI

>90

CLASSE A+ CE EMC □



UGR<19

DAVINCI-SLIDE20C-UGR


8031414878369

DAVINCI-SLIDE20M-UGR

8031414878376


Misure - Size

dimensioni in mm - size mm

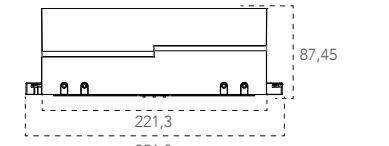

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT



DAVINCI-SLIDE20C


8031414878345

DAVINCI-SLIDE20M

8031414878352


Misure - Size

dimensioni in mm - size mm

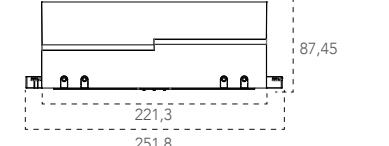

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

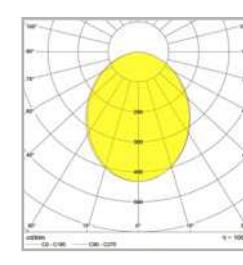

DAVINCI-SLIDE20 UGR



DAVINCI-S35C


8031414878390

DAVINCI-S35M

8031414878406


Misure - Size

dimensioni in mm - size mm

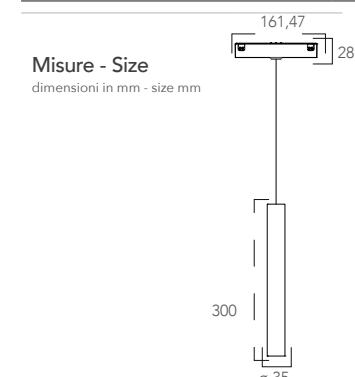

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT



DAVINCI-S60C


8031414878680

DAVINCI-S60M

8031414878659


Misure - Size

dimensioni in mm - size mm

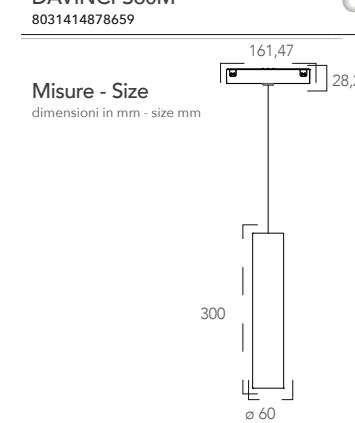

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT



TRACK DA VINCI


Binari ed accessori
Track rail and components



DAVINCI-H-2M
8031414878017


Binario sistema davinci montaggio a sospensione doppia emissione 2 metri nero 48V
Davinci system track rail suspension double emission black colour 2 meters 48V

Misure - Size
dimensioni in mm - size mm



DAVINCI-H-L
8031414878048

Connettore angolare per binario elettrificato biemissione sistema sfere volventi
Angular connection for davinci double emitting rail

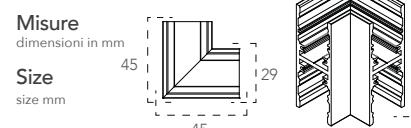


DAVINCI-H-CAP
8031414878451

Tappo laterale per binario biemissione sistema sfere volventi
End cap for double emitting davinci rail



DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari davinci a sospensione
Canopy for driver and connection box for suspension davinci rail

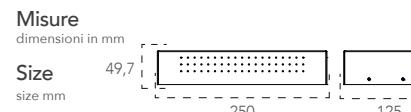


DAVINCI-S-3
8031414879762

Sistema sospensione 3 metri per binari davinci
Suspension kit 3 meters for davinci rail




DAVINCI-INC-2M
8031414878024

Misure - Size
dimensioni in mm - size mm




DAVINCI-INC-L
8031414878116

Connettore angolare per binario elettrificato incasso sistema sfere volventi
Angular connection for davinci recessed rail



DAVINCI-INC-LVI
8031414878123

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi
Angular internal emission connection for davinci recessed rail

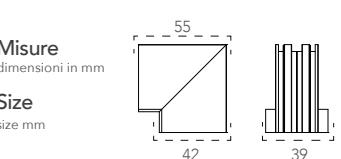

DAVINCI-INC-LVE
8031414878130

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi
Angular external emission connection for davinci recessed rail




DAVINCI-INC-CAP
8031414878413

Tappo laterale per binario ad incasso sistema sfere volventi
End cap for recessed davinci rail




DAVINCI-TL-2M
8031414878055

Misure - Size
dimensioni in mm - size mm




DAVINCI-TL-L
8031414878109

Connettore angolare per binario elettrificato incasso a filo (trimless) sistema sfere volventi
Angular connection for davinci trimless recessed rail

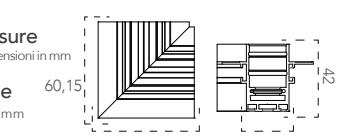


DAVINCI-TL-LVI
8031414878673

Connettore angolare verticale connessione interna per binario elettrificato incasso a filo (trimless) sistema sfere volventi
Angular internal emission connection for davinci trimless recessed rail

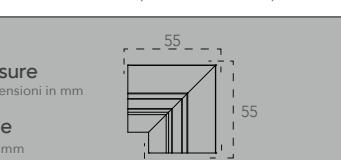

DAVINCI-TL-LVE
8031414878147

Connettore angolare verticale connessione esterna per binario elettrificato incasso a filo (trimless) sistema sfere volventi
Angular external emission connection for davinci trimless recessed rail

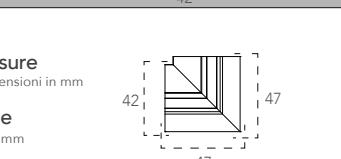

DAVINCI-TL-CAP
8031414878093

Tappo laterale per binario da incasso a filo (trimless) sistema sfere volventi
End cap for davinci invisible trimless recessed rail



DAVINCI-ST-2M
8031414878031

Binario sistema davinci montaggio a soffitto o sospensione 2 metri nero 48V
Davinci system track rail ceiling or suspension mount black colour 2 meters 48V

DAVINCI-ST-L
8031414878062

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi
Angular connection for davinci ceiling and suspension rail

DAVINCI-ST-LVI
8031414878079

Connettore angolare per binario elettrificato connessione interna sistema sfere volventi
Angular internal light emission connection for davinci ceiling and suspension rail

DAVINCI-ST-LVE
8031414878086

Connettore angolare per binario elettrificato connessione esterna sistema sfere volventi
Angular external light emission connection for davinci ceiling and suspension rail

DAVINCI-ST-CAP
8031414878468

Tappo laterale per binario montaggio a soffitto o sospensione sistema sfere volventi
End cap for davinci rail ceiling and single emitting suspension rail

DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari davinci a sospensione
Canopy for driver and connection box for suspension davinci rail

DAVINCI-S-3
8031414879762

Sistema sospensione 3 metri per binari davinci
Suspension kit 3 meters for davinci rail

Misure - Size
dimensioni in mm - size mm

Misure
dimensioni in mm
Size
size mm

DAVINCI-NEST
8031414878161

Innesto per elettrificazione 48V compatibile con tutti i modelli di Binario del sistema davinci 48V power engine for all the davinci rail system models

DAVINCI-I-CONN
8031414878178

Connettore 48V compatibile con tutti i modelli di binario del sistema connector 48V compatible with all the davinci rail system models

DAVINCI-L-CONN
8031414878185

Connettore angolare 48V compatibile con tutti i modelli di binario del sistema connector angular 48V compatible with all the davinci rail system models

DAVINCI-LVI-CONN
8031414878192

Connettore angolare interno 48V compatibile con tutti i modelli di binario del sistema davinci Connector angular internal 48V compatible with all the davinci rail system models

DAVINCI-LVE-CONN
8031414878208

Connettore angolare esterno 48V compatibile con tutti i modelli di binario del sistema davinci Connector angular external 48V compatible with all the davinci rail system models

DAVINCI-COVER-2M
8031414878154

Cover nera compatibile con tutti i modelli di binario davinci 200 cm Cover black colour compatible with all the davinci track rail models 200 cm

DAVINCI-BRAKE
8031414878383


Kit 2pz fermi per corpi illuminanti sistema sfere volventi Side brake for davinci light source modules

**Driver 48V per sistema davinci a pag. 570
48V drivers for davinci system page 570**



SMART INTEC
Bluetooth
Sig mesh

KONE

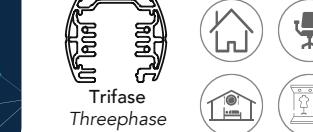

Faro binario con adattatore trifase

Track light with three phase adaptor

Materiale

Material

Corpo in alluminio pressofuso

Diecast aluminium

Colore finitura

Finiture colour

Bianco matto - Nero matto

Finish matt white or black

Sorgente luminosa

Light source

LED COB 30W

LED COB 30W

Driver

Driver

integrato

built-in

Temperatura colore

Colour temperature



Flusso luminoso

Luminous flux

3000 Lm

3000 Lm

Durata e on/off

Life time and on/off

25.000 h ~ > 15.000 on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

Beam angle

38°

38°

CRI

CRI


>90

>90




LED-KONE-B-30BT 8031414866694	[Black square]	30W	3000 LM	PF 0,90
LED-KONE-W-30BT 803141486656	[White square]	30W	3000 LM	PF 0,90

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT



Misure - Size
dimensioni in mm - size mm

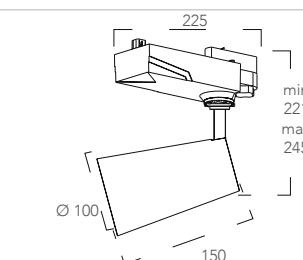

LED-KONE-B-30BT
LED-KONE-W-30BT

ACCESSORI KONE

Retina antiabbagliamento
Anti glare retina



LED-KONE-MESH100
8031414870431

Deviatore Flusso luminoso
Luminous flux diverter



LED-KONE-DIFF100
8031414870424

KONE



Faro binario con adattatore trifase invisibile

Track light with invisible three phase adaptor

Materiale

Corpo in alluminio pressofuso

Colore finitura

Bianco matto - Nero matto - Rosa opaco
Verde opaco - Giallo opaco

Sorgente luminosa

LED COB 13W - 24W - 42W

Driver

incluso

Temperatura colore

3000K - 4000K



Flusso luminoso

1300 Lm - 2400 Lm - 4200 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

38°

CRI

>90



Material

Aluminum die cast body

Finiture colour

matt white - matt black - matt green - matt pink -
matt yellow

Light source

LED COB 13W - 24W - 42W

Driver

included

Colour temperature

3000K - 4000K



Luminous flux

1300 Lm - 2400 Lm - 4200 Lm

Life time and on/off

25.000 h ~ > 15.000 on/off

Beam angle

38°

CRI

>90



KONE



LED-KONE-B-13C
8031414867684

13W 1300 LM

LED-KONE-B-13M
8031414867622

13W 1300 LM


LED-KONE-W-13C
8031414867691

13W 1300 LM


LED-KONE-W-13M
8031414867677

13W 1300 LM

Misure - Size
dimensioni in mm - size mm

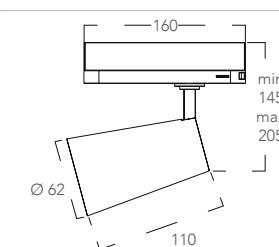

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF THE PRODUCT

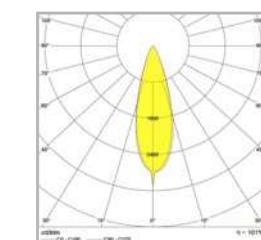

LED-KONE 13W

LED-KONE-B-24C
8031414867721

24W 2400 LM

LED-KONE-B-24M
8031414867707

24W 2400 LM


LED-KONE-W-24C
8031414867745

24W 2400 LM


LED-KONE-W-24M
8031414867714

24W 2400 LM

Misure - Size
dimensioni in mm - size mm

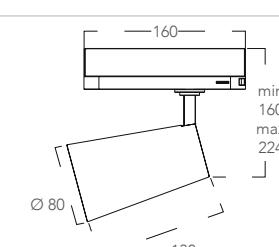

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF THE PRODUCT

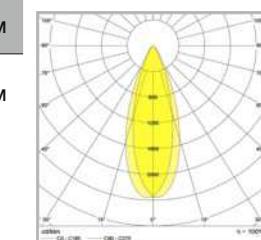

LED-KONE 24W

LED-KONE-B-42C
8031414867769

42W 4200 LM PF 0,90

LED-KONE-B-42M
8031414867738

42W 4200 LM PF 0,90


LED-KONE-W-42C
8031414867783

42W 4200 LM PF 0,90


LED-KONE-W-42M
8031414867752

42W 4200 LM PF 0,90

Misure - Size
dimensioni in mm - size mm

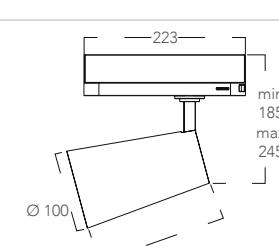

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF THE PRODUCT

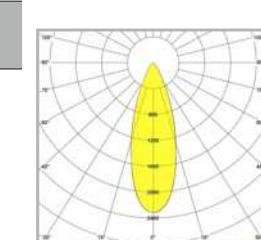

LED-KONE 42W



LED-KONE-ROS-24M
8031414866663

24W 2400 LM


LED-KONE-VER-24M
8031414866687

24W 2400 LM


LED-KONE-GIA-24M
8031414866700

24W 2400 LM

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF THE PRODUCT

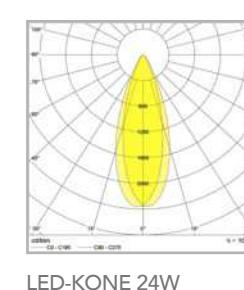

Misure - Size
dimensioni in mm - size mm

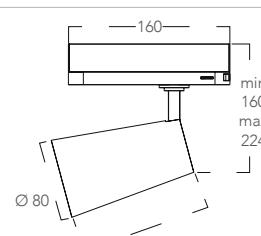

Retina antiabbagliamento
Anti glare retina

ACCESSORI KONE

LED-KONE-MESH62
8031414870455

PER
13W

LED-KONE-MESH80
8031414870462

PER
24W

LED-KONE-MESH100
8031414870431

PER
42W

Deviatore Flusso luminoso
Luminous flux diverter



LED-KONE-DIFF62
8031414870448

PER
13W

LED-KONE-DIFF80
8031414870417

PER
24W

LED-KONE-DIFF100
8031414870424

PER
42W

ACTION



Faro binario con adattatore trifase invisibile
Track light with invisible three phase adaptor

Materiale

Corpo in alluminio pressofuso
Diecast aluminium

Colore finitura

Bianco matto - Nero matto
matt white or matt black

Sorgente luminosa

LED COB 13W - 20W - 42W

Driver

incluso
included

Temperatura colore

3000K - 4000K

Flusso luminoso

1300 Lm - 2000 Lm - 4200 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

38°

CRI

>90



Track light with invisible three phase adaptor

Material

Diecast aluminium

Finiture colour

matt white or matt black

Light source

LED COB 13W - 20W - 42W

Driver

incluso
included

Colour temperature

3000K - 4000K

Luminous flux

1300 Lm - 2000 Lm - 4200 Lm

Life time and on/off

25.000 h ~ > 15.000 on/off

Beam angle

38°

CRI

>90



ACTION





LED-ACTION-B-13C 8031414867806 13W 1300 LM

LED-ACTION-B-13M 8031414867776 13W 1300 LM

LED-ACTION-W-13C 8031414867820 13W 1300 LM

LED-ACTION-W-13M 8031414867790 13W 1300 LM

Misure - Size
dimensioni in mm - size mm

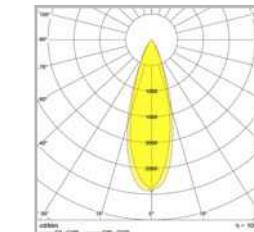

LED-ACTION 13W



LED-ACTION-B-20C 8031414867844 20W 2000 LM

LED-ACTION-B-20M 8031414867813 20W 2000 LM

LED-ACTION-W-20C 8031414867837 20W 2000 LM

LED-ACTION-W-20M 8031414866724 20W 2000 LM

Misure - Size
dimensioni in mm - size mm

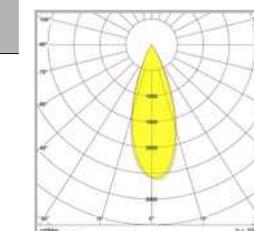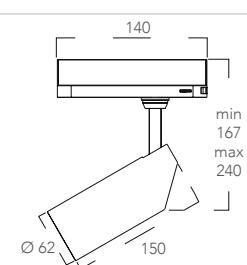

LED-ACTION 20W



LED-ACTION-B-42C 8031414867851 42W 4200 LM PF 0,90

LED-ACTION-B-42M 8031414867868 42W 4200 LM PF 0,90

LED-ACTION-W-42C 8031414867875 42W 4200 LM PF 0,90

LED-ACTION-W-42M 8031414867882 42W 4200 LM PF 0,90

Misure - Size
dimensioni in mm - size mm

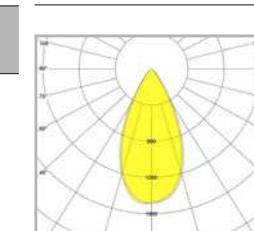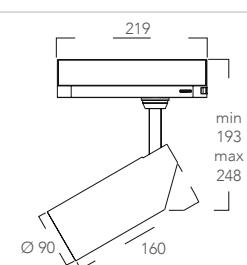

LED-ACTION 42W

ACCESSORI ACTION

Retina antiabbagliamento
Honeycomb mesh



LED-ACTION-MESH50 8031414875986 PER 13W

LED-ACTION-MESH62 8031414875993 PER 20W

LED-ACTION-MESH90 8031414876006 PER 42W

Deviatore Flusso luminoso
Luminous Luminous flux diverter



LED-ACTION-DIFF50 8031414875955 PER 13W

LED-ACTION-DIFF62 8031414875962 PER 20W

LED-ACTION-DIFF90 8031414875979 PER 42W



ROCKET



Faro binario con adattatore trifase

Track light with three phase adaptor

Materiale

Corpo in alluminio pressofuso

Material

Diecast aluminium

Colore finitura

Bianco matto - Nero matto - Bronzo
Cromo - Oro

Finiture colour

Matt white - Matt black - Gold - Chrome - Bronze

Sorgente luminosa

LED COB 7W

Light source

LED COB 7W

Driver

integrato

Driver

built-in

Temperatura colore

3000K - 4000K

Colour temperature

3000K - 4000K

Flusso luminoso

700 Lm

Luminous flux

700 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Life time and on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

38°

Beam angle


38°

CRI

>80

CRI

>80

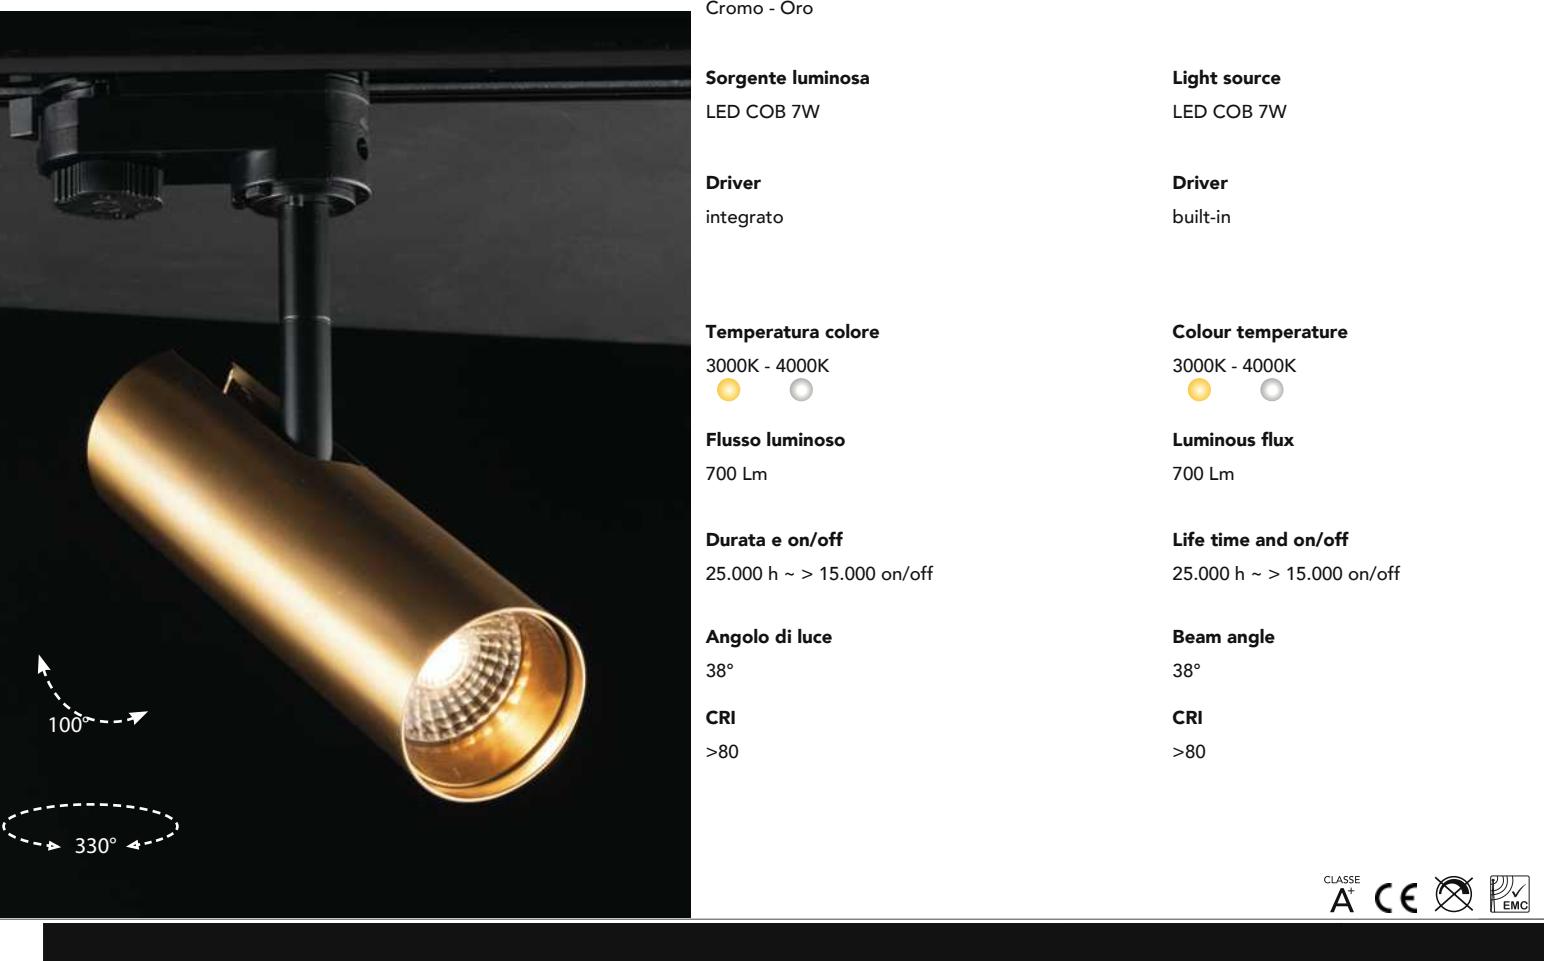


CLASSE A CE EMC



FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT



LED-ROCKET-7

LED-ROCKET-7C CR
8031414864294

LED-ROCKET-7M CR
8031414864317

LED-ROCKET-7C ORO
8031414864164

LED-ROCKET-7M ORO
8031414864737

LED-ROCKET-7C BRO
8031414864188


LED-ROCKET-7M BRO
8031414864744

LED-ROCKET-7C NERO
8031414861965


LED-ROCKET-7M NERO
8031414864300

LED-ROCKET-7C BCO
8031414861972

LED-ROCKET-7M BCO
8031414864171

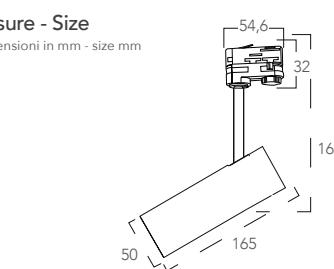

ROCKET

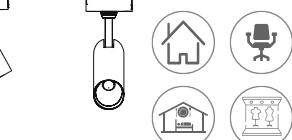

Spot applique

Wall spot light

Materiale

Corpo in alluminio pressofuso

Material

Diecast aluminium

Colore finitura

Bianco matto - Nero matto

Finiture color

Matt white - Matt black



CLASSE A CE EMC




LED-ROCKET-APC NERO
8031414861989

LED-ROCKET-APM NERO
8031414864980

LED-ROCKET-APC BCO
8031414861996


LED-ROCKET-APM BCO
8031414864966

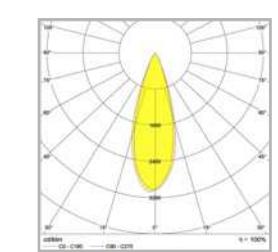

LED-ROCKET-APC

Misure - Size

dimensioni in mm - size mm

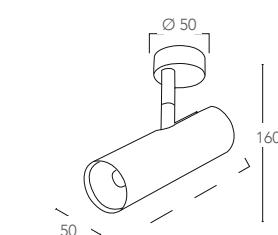

OBOE



Sospensione in alluminio con adattatore trifase

Aluminum pendant lamp with three phase adaptor

Materiale

Corpo in alluminio pressofuso

Material

Diecast aluminium

Colore finitura

Cromo - Bronzo - Oro - Nero - Bianco

Finiture colour

White - Black - Gold - Chrome - Bronze

Sorgente luminosa

LED COB 3,5W

Light source

LED COB 3,5W

Driver

integrato

Driver

built-in

Temperatura colore

3000K - 4000K

Colour temperature

3000K - 4000K

Flusso luminoso

280 Lm

Luminous flux

280 Lm

Durata e on/off

25.000 h ~ > 15.000 on/off

Life time and on/off

25.000 h ~ > 15.000 on/off

Angolo di luce

40°

Beam angle

40°

CRI


>80

CRI

>80



CLOCK

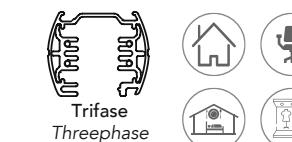

Sospensione con adattatore trifase

Pendant lamp with three phase adaptor

Materiale

Alluminio con cavo in tessuto nero

Material

Aluminium with black fabric cable

Colore finitura

Cromo - Nero anodizzato

Finiture colour

Chrome - black anodized

Sorgente luminosa

1xE27


Light source

1xE27



FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

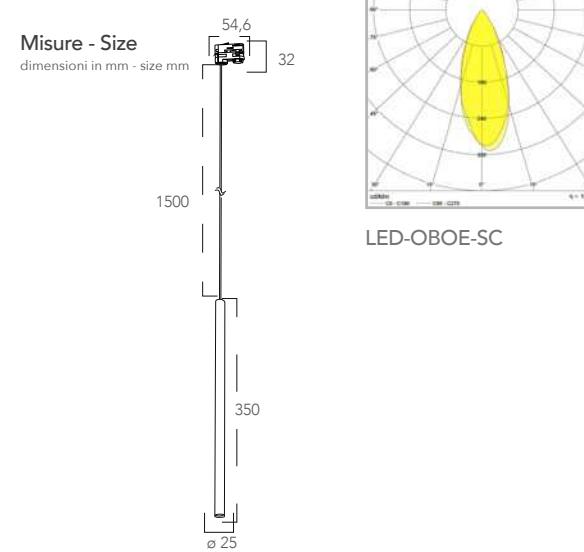


I-TRACK-CLOCK-CR
8031414864072


1xE27 max 60w
non incluse - not included

I-TRACK-CLOCK-NERO
8031414864096

1xE27 max 60w
non incluse - not included

Misure - Size
dimensioni in mm - size mm

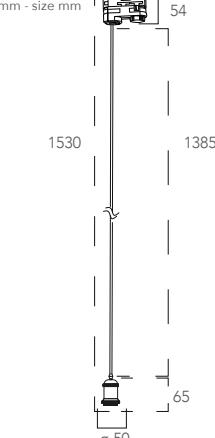

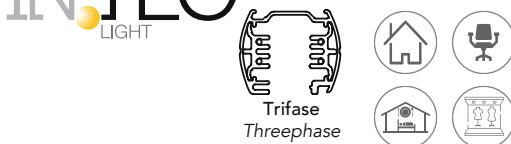

Faro binario con adattatore trifase

Track light with three phase adaptor

Materiale

Metallo

Colore finitura

Bianco satinato - Nero satinato

Material

Metal

Finiture colour

Satin white - Satin black

Sorgente luminosa


1xE27

Light source








1xE27



TRACK



Schema di montaggio sistema binari
Assembling technical sheet track rail system

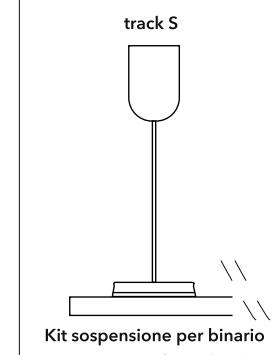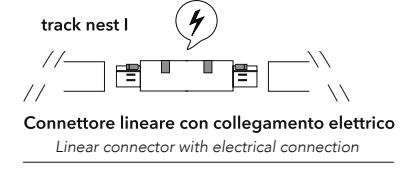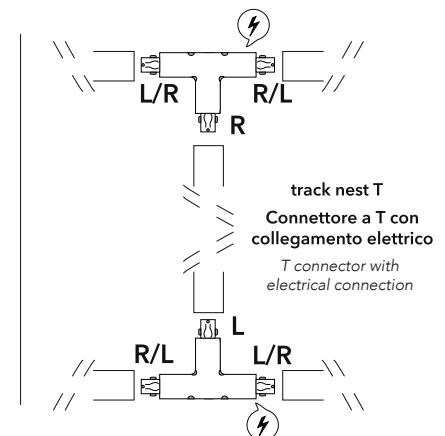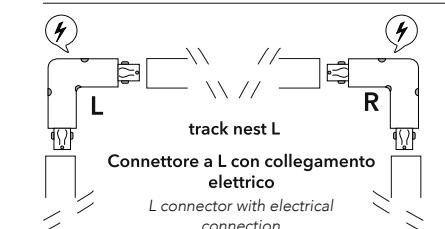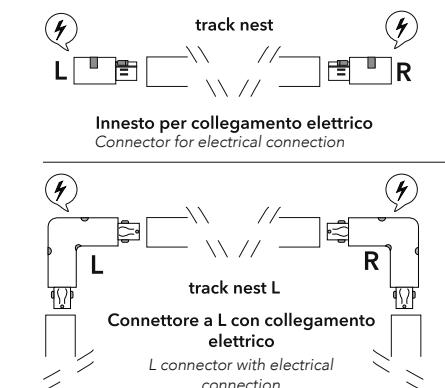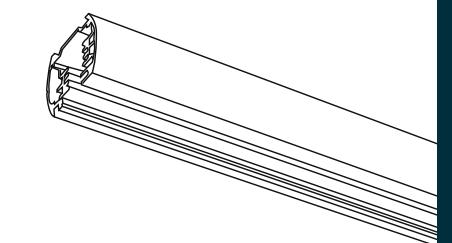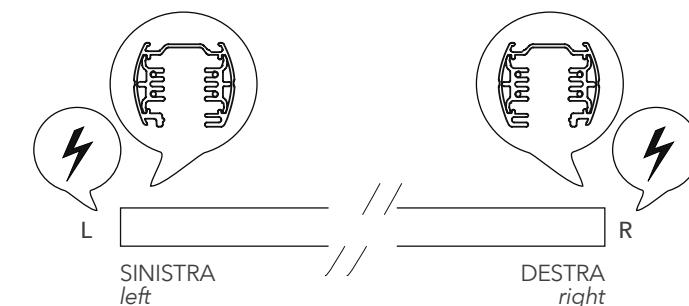



LED-EXPRESS
8031440360470


1xE27 max 42w
non include - not included

LED-EXPRESS-B
8031414864676


1xE27 max 42w
non include - not included

Misure - Size
dimensioni in mm - size mm

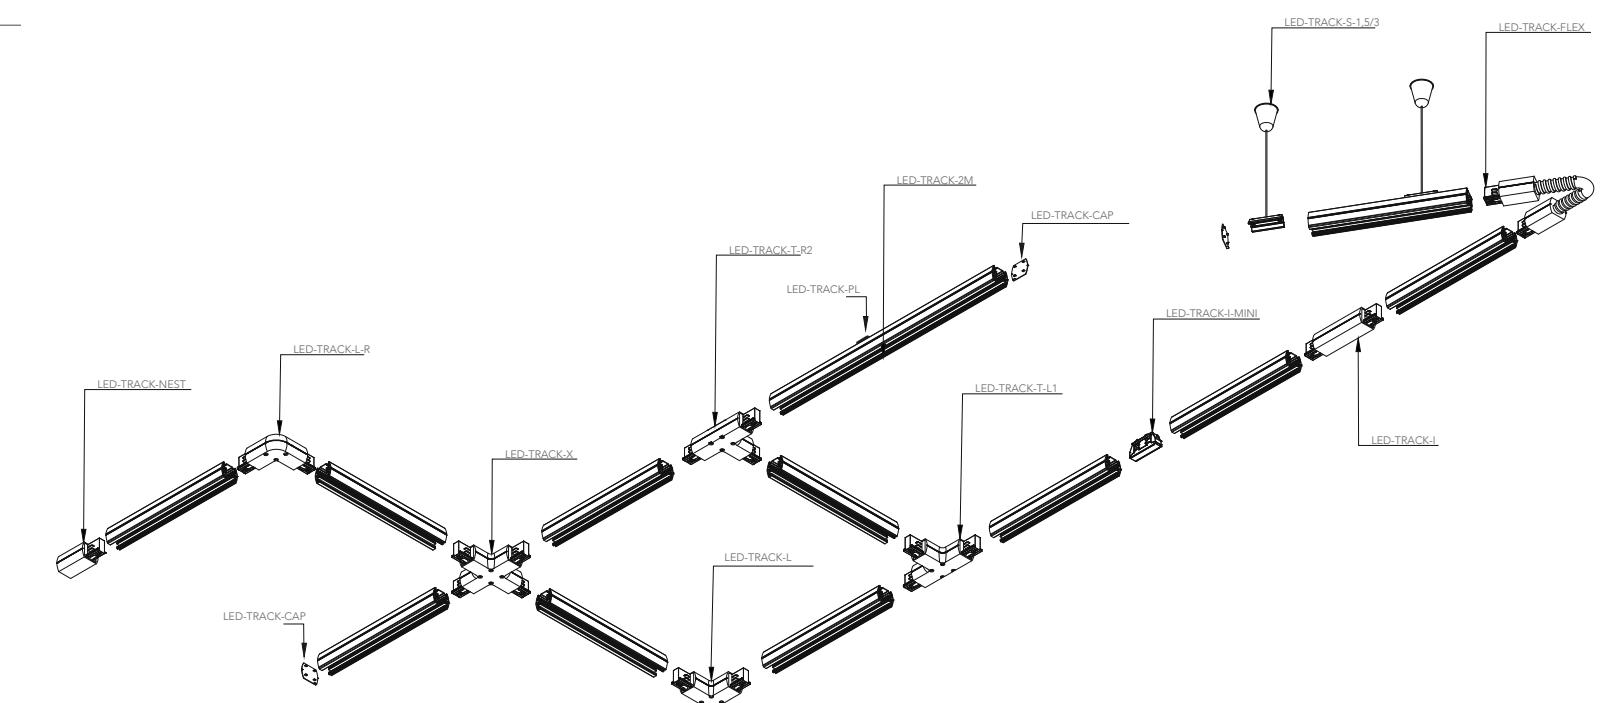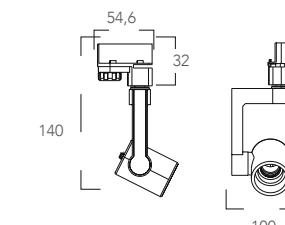


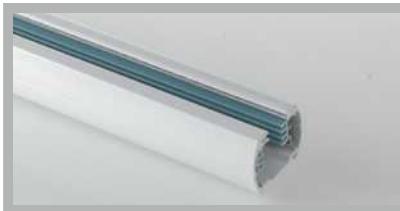
LED-TRACK-1M
 8031439221263


 Binari elettrificati trifase in alluminio bianco 1 metro (tappi inclusi)
 1 meter track rail in white aluminium with three phase adaptor (endcap included)

 Misure - Size
 dimensioni in mm
 size mm

LED-TRACK-1M-NERO
 8031440360425

 Binari elettrificati trifase in alluminio bianco 1 metro (tappi inclusi)
 1 meter track rail in white aluminium with three phase adaptor (endcap included)

 Misure - Size
 dimensioni in mm
 size mm

LED-TRACK-PL
 8031440358668


 Kit 2pz. basette bianche per binario guida trifase
 Kit 2pcs. white Base for track rail three phase

 Misure - Size
 dimensioni in mm
 size mm

LED-TRACK-PL-NERO
 8031440358699

 Kit 2pz. basette nere per binario guida trifase
 Kit 2pcs. black Base for track rail three phase

LED-TRACK-BASE
 8031440361668



 Base tonda bianca per faro con adattatore trifase (non adatto per art. KONE, ACTION,EAGLE)
 White round base for track lamp with three phase adaptor (not useful items KONE, ACTION, EAGLE)

 Misure - Size
 dimensioni in mm
 size mm

LED-TRACK-BASE NERO
 8031440361675

 Base tonda nera per faro con adattatore trifase (non adatto per art. KONE, ACTION,EAGLE)
 Black round base for track lamp with three phase adaptor (not useful items KONE, ACTION, EAGLE)

LED-TRACK-CAP
 8031414866229

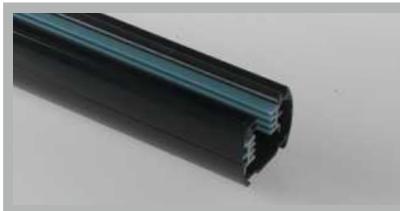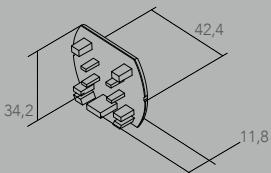
 Tappo per binario bianco
 White cap for three phase track rail

 Misure - Size
 dimensioni in mm
 size mm

LED-TRACK-CAP NERO
 8031414866205

 Tappo per binario nero
 Black cap for three phase track rail

LED-TRACK-ADAT
 8031414866410

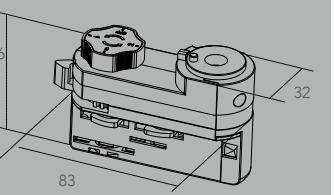
 Adattatore bianco per binario trifase
 White adapt for three phase track rail

 Misure - Size
 dimensioni in mm
 size mm

LED-TRACK-ADAT NERO
 8031414866397


 Adattatore nero per binario trifase
 Black adapt for three phase track rail

LED-TRACK-S 1,5
 8031440359061

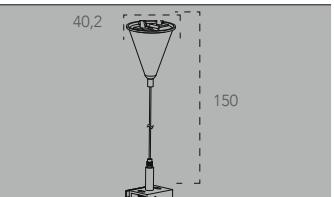
 Sistema sospensione 1,5 metri per binari bianco
 White suspension kit 1,5 meters for track rail

 Misure - Size
 dimensioni in mm
 size mm

LED-TRACK-S 3
 8031440359047

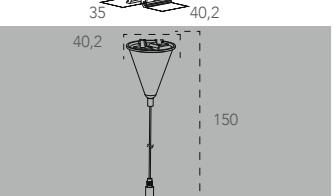
 Sistema sospensione 3 metri per binari bianco
 White suspension kit 3 meters for rail track

 Misure - Size
 dimensioni in mm
 size mm

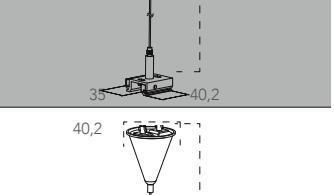LED-TRACK-S 1,5 NERO
 8031440359078

 Sistema sospensione 1,5 metri per binari nero
 Black suspension kit 1,5 meters for track rail

 Misure - Size
 dimensioni in mm
 size mm

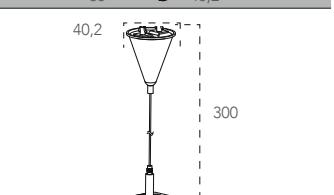LED-TRACK-S 3 NERO
 8031440359054

 Sistema sospensione 3 metri per binari nero
 Black suspension kit 3 meters for track rail

 Misure - Size
 dimensioni in mm
 size mm


TRACK

Binari ed accessori
Track and components


R: RIGHT (DESTRO)
L: LEFT (SINISTRO)



LED-TRACK-I-MINI
8031440358705

Connettore lineare mini bianco a scomparsa per sistema binari trifase
White mini invisible connector for three phase track rail system

Misure - Size
dimensioni in mm
size mm

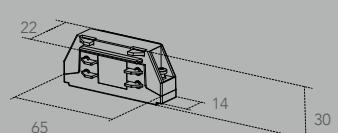

LED-TRACK-I-MINI-NERO
8031440357845



Connettore lineare mini nero a scomparsa per sistema binari trifase
Black mini invisible connector for three phase track rail system



LED-TRACK-NEST
8031440311564

Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase
White Recess power connector left side for three phase track rail, L N input + ground cable for three-phase circuit

Misure - Size
dimensioni in mm
size mm

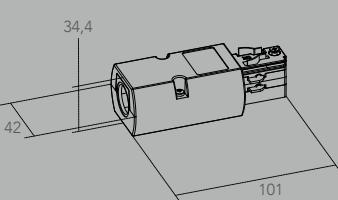

LED-TRACK-NEST-R
8031440359009

Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase
White Recess power connector right side for three phase track rail, L N input + ground cable for three-phase circuit



LED-TRACK-NEST-NERO
8031440360418

Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase
Black Recess power connector left side for three phase track rail, L N input + ground cable for three-phase circuit



LED-TRACK-NEST-R NERO
8031440359016


Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase
Black Recess power connector right side for three phase track rail, L N input + ground cable for three-phase circuit



LED-TRACK-I
8031440311526

Connettore bianco lineare per binari sistema trifase
White straight connector for three phase track rail system

Misure - Size
dimensioni in mm
size mm

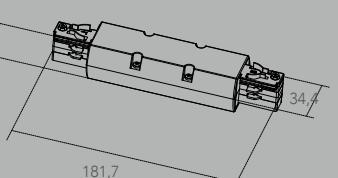

LED-TRACK-I-NERO
8031440360432


Connettore nero lineare per binari sistema trifase
Black straight connector for three phase track rail system



LED-TRACK-FLEX
8031440359085

Connettore bianco flessibile per sistema trifase
White flexible power connector for three phase track rail system

Misure - Size
dimensioni in mm
size mm

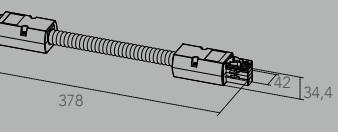

LED-TRACK-FLEX-NERO
8031440359030


Connettore nero flessibile per sistema trifase
Black flexible power connector for three phase track rail system



LED-TRACK-X
8031439231262

Connettore a croce bianco per sistema trifase
White extension X shape for three phase track rail system


Misure - Size
dimensioni in mm
size mm

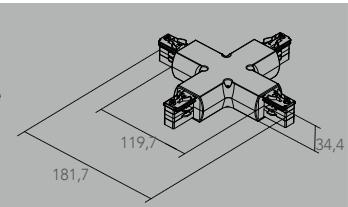

LED-TRACK-X-NERO
8031440360395


Connettore a croce nero per sistema trifase
Black extension X shape for three phase track rail system

Misure - Size
dimensioni in mm
size mm

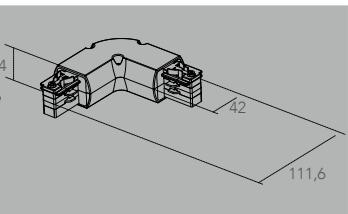

LED-TRACK-L-R
8031440358972

Connettore bianco track destro a elle per binari guida trifase
White L connector right side for three phase track rail system

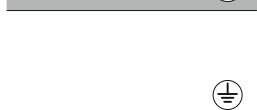


LED-TRACK-L
8031439241261

Connettore bianco track sinistro a elle per binari guida trifase
White L connector left side for three phase track rail system



LED-TRACK-L-R-NERO
8031440359023



Connettore nero track destro a elle per binari guida trifase
Black L connector right side for three phase track rail system

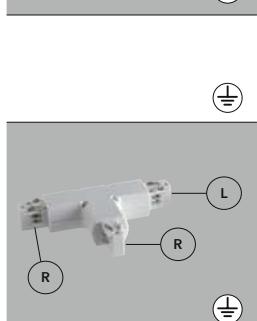

LED-TRACK-T
8031440311571


Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable

Misure - Size
dimensioni in mm
size mm

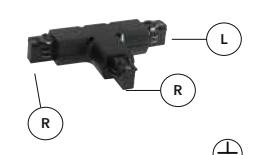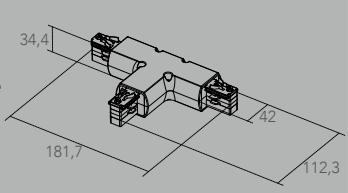


LED-TRACK-T NERO
8031440360388

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable

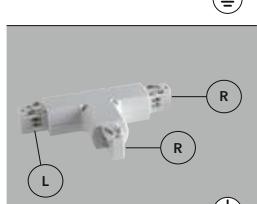

LED-TRACK-T-L1
8031440358989

Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable

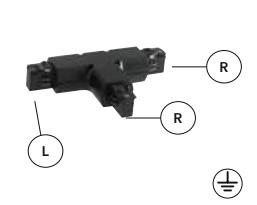


LED-TRACK-TL1
8031440358996

Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable

TRACK

Binari ed accessori
Track and components



R: RIGHT (DESTRO)
L: LEFT (SINISTRO)

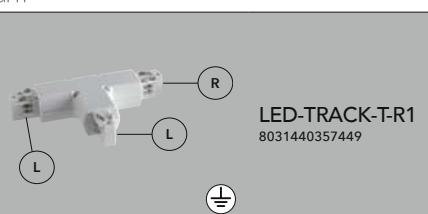

LED-TRACK-T-R1
8031440357449


Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system

Misure - Size
dimensioni in mm
size mm

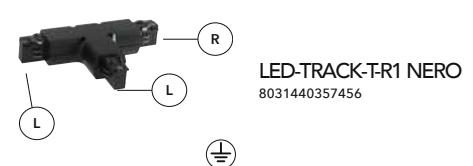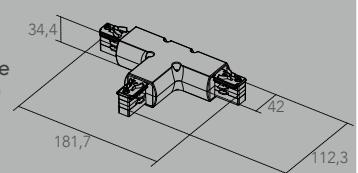

LED-TRACK-T-R1 NERO
8031440357456



Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
Black T connector right side for three phase track rail system

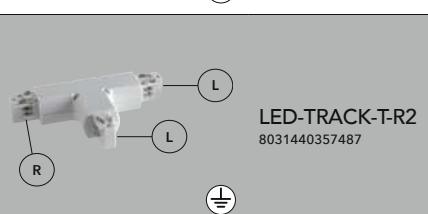

LED-TRACK-T-R2
8031440357487

Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector left side for three phase track rail system

Misure - Size
dimensioni in mm
size mm

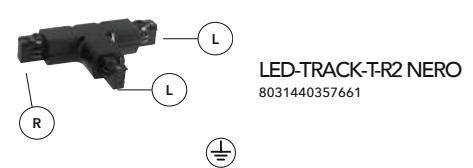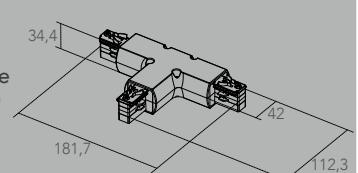

LED-TRACK-T-R2 NERO
8031440357661

Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
Black T connector left side for three phase track rail system

TRACK


Binari ed accessori incasso
Recess track rail and components



LED-TRACK-1M-INC
8031440361804

Binario trifase ad incasso bianco 1m
Recessed track rail in white aluminium 1m


Misure - Size
dimensioni in mm
size mm



LED-TRACK-2M-INC
8031440361811

Binario trifase ad incasso bianco 2m
Recessed track rail in white aluminium 2m


Misure - Size
dimensioni in mm
size mm



LED-TRACK-1M-INC NERO
8031414864836

Binario trifase ad incasso nero 1m
Recessed track rail in black aluminium 1m

Misure - Size
dimensioni in mm
size mm



LED-TRACK-2M-INC NERO
8031414864058

Binario trifase ad incasso nero 2m
Recessed track rail in black aluminium 2m


Misure - Size
dimensioni in mm
size mm



INC-TRACK-STAFFE
8031414879700

Kit 2pz staffe zincate per binario incasso
Kit 2pcs metal bracket for recessed track rail


Misure - Size
dimensioni in mm
size mm

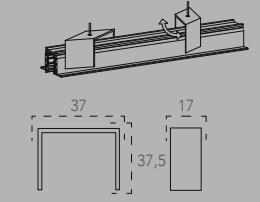

INC-TRACK-NEST
8031414871193

Innesto sinistro per binario ad incasso trifase bianco
White recess power connector left side for three phase track rail


Misure - Size
dimensioni in mm
size mm

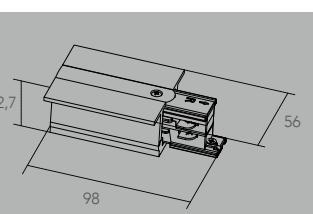

INC-TRACK-NEST-R
8031414871179

Innesto destro per binario ad incasso trifase bianco
White recess power connector right side for three phase track rail


Misure - Size
dimensioni in mm
size mm

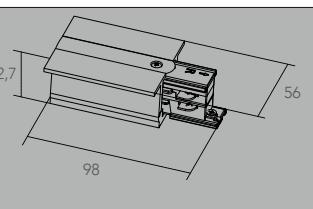

INC-TRACK-NEST NERO
8031414871209

Innesto sinistro per binario ad incasso trifase nero
Black recess power connector left side for three phase track rail


Misure - Size
dimensioni in mm
size mm

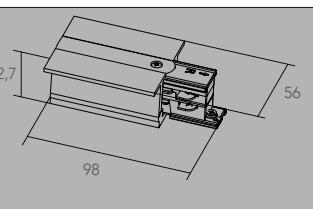

INC-TRACK-I
8031414871254

Connettore bianco lineare ad incasso per binari trifase
White recess straight connection for three phase track rail system


Misure - Size
dimensioni in mm
size mm

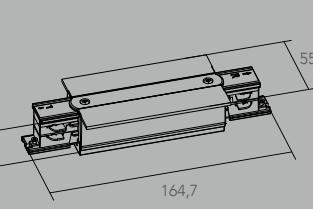

INC-TRACK-I NERO
8031414871261

Connettore nero lineare ad incasso per binari trifase
Black recess straight connection for three phase track rail system


Misure - Size
dimensioni in mm
size mm

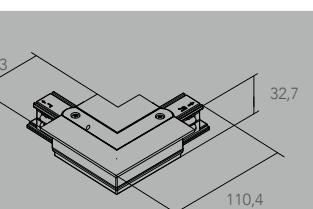

INC-TRACK-L-R
8031414871216

Connettore bianco ad incasso destro a L per binari trifase
White recess L connector right side for three phase track rail system


Misure - Size
dimensioni in mm
size mm

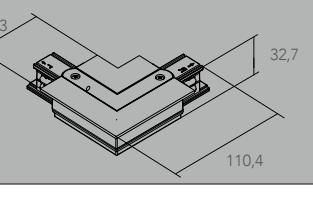

INC-TRACK-L
8031414871230

Connettore bianco ad incasso sinistro a L per binari trifase
White recess L connector left side for three phase track rail system


Misure - Size
dimensioni in mm
size mm

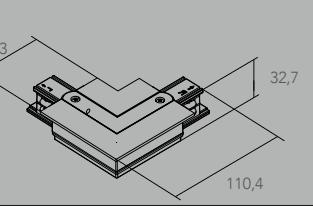

INC-TRACK-L-R NERO
8031414871223

Connettore nero ad incasso destro a L per binari trifase
Black recess L connector right side for three phase track rail system


Misure - Size
dimensioni in mm
size mm

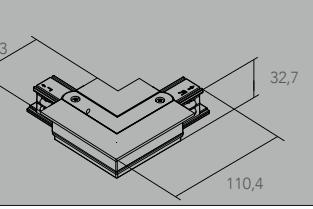

INC-TRACK-L NERO
8031414871247

Connettore nero ad incasso sinistro a L per binari trifase
Black recess L connector left side for three phase track rail system

Misure - Size
dimensioni in mm
size mm

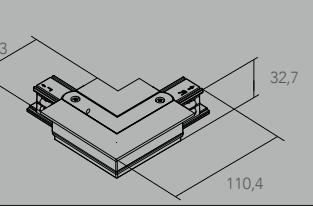



APOLLO



Incasso antiriflesso luce spot
con doppia orientabilità

Materiale

Alluminio

Colore finitura

Bordo bianco e interno nero satinato

Sorgente luminosa

LED COB 10W - 20W - 30W - 45W

Driver

incluso

Temperatura colore

3000K - 4000K

Punti luce

1 - 2 - 3

Flusso luminoso

800 Lm - 1600 Lm - 2400 Lm - 3600 Lm
1600 Lm - 3200 Lm - 4800 Lm - 7200 Lm
2400 Lm - 4800 Lm - 7200 Lm - 10800 Lm

Durata e on/off

40.000 h ~ >20.000 on/off

Angolo di luce

40°

CRI

>80

Antiglare recess spot light
with double orientability

Material

Aluminium

Finiture colour

body with white edge and satin black internal

Light source

LED COB 10W - 20W - 30W - 45W

Driver

included

Colour temperature

3000K - 4000K



APOLLO



INC-APOLLO-1X10C 8031440360623	10W	800 LM
INC-APOLLO-1X10M 8031440360630	10W	800 LM
INC-APOLLO-1X20C 8031440360692	20W	1600 LM

INC-APOLLO-1X20M 8031440360708	20W	1600 LM
INC-APOLLO-1X30C 8031440360753	30W	2400 LM
INC-APOLLO-1X30M 8031440360760	30W	2400 LM

INC-APOLLO-1X45C 8031440360777	45W	3600 LM	PF 0.90
INC-APOLLO-1X45M 8031440360784	45W	3600 LM	PF 0.90

Potenza - power

10W

20W

30W - 45W

Foro - cut out

dimensioni in mm - size mm




100X100

125X125

175X175

Misure - Size

dimensioni in mm - size mm



INC-APOLLO-2X10C 8031440360647

2X10W

1600 LM

INC-APOLLO-2X30C 8031440360791	2X30W	4800 LM	PF 0.90
INC-APOLLO-2X30M 8031440360807	2X30W	4800 LM	PF 0.90
INC-APOLLO-2X45C 8031440360814	2X45W	7200 LM	PF 0.90

INC-APOLLO-2X10M 8031440360654	2X10W	1600 LM
INC-APOLLO-2X20C 8031440360715	2X20W	3200 LM
INC-APOLLO-2X20M 8031440360722	2X20W	3200 LM

Potenza - power

2x10W

2x20W

2x30W - 2x45W

Foro - cut out

dimensioni in mm - size mm

190X100

245X125

320X175

Misure - Size

dimensioni in mm - size mm



INC-APOLLO-3X10C 8031440360661

3X10W

2400 LM

INC-APOLLO-3X30C 8031440360845	3X30W	7200 LM	PF 0.90
INC-APOLLO-3X30M 8031440360838	3X30W	7200 LM	PF 0.90
INC-APOLLO-3X45C 8031440360852	3X45W	10800 LM	PF 0.90

INC-APOLLO-3X10M 8031440360678	3X10W	2400 LM
INC-APOLLO-3X20C 8031440360746	3X20W	4800 LM
INC-APOLLO-3X20M 8031440360739	3X20W	4800 LM

Potenza - power

3x10W

3x20W

3x30W - 3x45W

Foro - cut out

dimensioni in mm - size mm


290X100

355X125

475X175

Misure - Size

dimensioni in mm - size mm



* Le curve fotometriche sopra indicate rappresentano il singolo modulo LED per ogni elemento

* Above photometric curve represent the single module of each element

OUTSIDER



Incasso antiriflesso luce spot con testa estraibile e orientabile

Materiale

Alluminio

Colore

Bianco matto con bordatura interna nera

Sorgente luminosa

LED COB 15W - 30W

Driver

incluso

Temperatura colore

3000K - 4000K



Punti luce

1 - 2 - 3

Flusso luminoso

1200 Lm - 2400 Lm - 4800 Lm - 3600 Lm - 7200 Lm

Durata e on/off

40.000 h ~ >20.000 on/off

Angolo di luce

24°

CRI

>80

Antiglare recess spot light with extractable orientable head

Material

Alluminium

Colour

Matt white color and black internal ring

Light source

LED COB 15W - 30W

Driver

included

Colour temperature

3000K - 4000K



Number of light sources

1 - 2 - 3

Luminous flux

1200 Lm - 2400 Lm - 4800 Lm - 3600 Lm - 7200 Lm


Life time and on/off

40.000 h ~ >20.000 on/off



FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

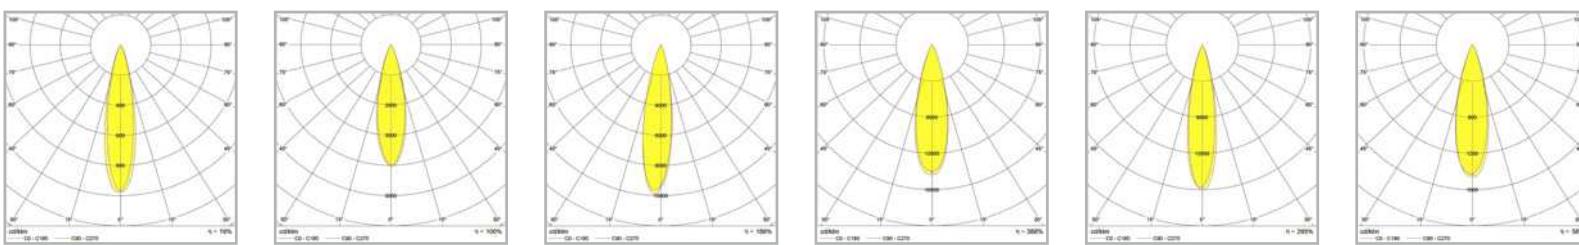

INC-OUTSIDER-1X15

INC-OUTSIDER-1X30

INC-OUTSIDER-2X15

INC-OUTSIDER-2X30

INC-OUTSIDER-3X15

INC-OUTSIDER-3X30

* Le curve fotometriche sopra indicate rappresentano il singolo modulo LED per ogni elemento
* Above photometric curve represent the single module of each element

OUTSIDER



INC-OUTSIDER-1X15C 8031414864225		15W	1200 LM
-------------------------------------	--	-----	---------

INC-OUTSIDER-1X15M 8031414864119		15W	1200 LM
-------------------------------------	--	-----	---------


INC-OUTSIDER-1X30C 8031414864256		30W	2400 LM
-------------------------------------	--	-----	---------

INC-OUTSIDER-1X30M 8031414864133		30W	2400 LM
-------------------------------------	--	-----	---------

Potenza - power


1X15W

Foro - cut out
dimensioni in mm - size mm





Misure - Size

dimensioni in mm - size mm

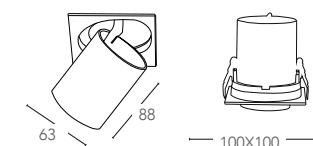

1X30W

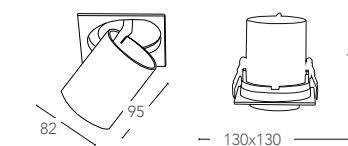

INC-OUTSIDER-2X15C 8031414864232		2X15W	2400 LM
-------------------------------------	--	-------	---------

INC-OUTSIDER-2X15M 8031414864126		2X15W	2400 LM
-------------------------------------	--	-------	---------


INC-OUTSIDER-2X30C 8031414864263		2X30W	4800 LM
-------------------------------------	--	-------	---------

INC-OUTSIDER-2X30M 8031414864140		2X30W	4800 LM
-------------------------------------	--	-------	---------

Potenza - power


2X15W

Foro - cut out
dimensioni in mm - size mm





Misure - Size

dimensioni in mm - size mm

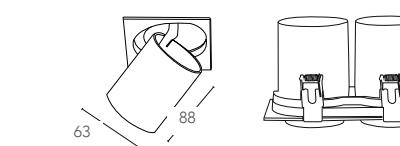

2X30W

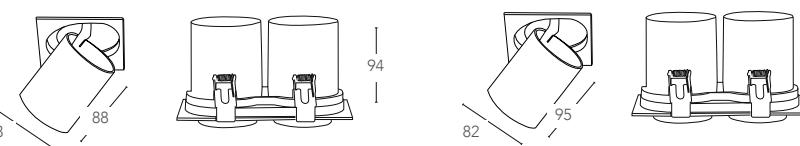

INC-OUTSIDER-3X15C 8031414864249		3X15W	3600 LM
-------------------------------------	--	-------	---------

INC-OUTSIDER-3X15M 8031414864102		3X15W	3600 LM
-------------------------------------	--	-------	---------

INC-OUTSIDER-3X30C 8031414864270		3X30W	7200 LM
-------------------------------------	--	-------	---------

INC-OUTSIDER-3X30M 8031414864157		3X30W	7200 LM
-------------------------------------	--	-------	---------

Potenza - power


3X15W

Foro - cut out
dimensioni in mm - size mm




Misure - Size

dimensioni in mm - size mm

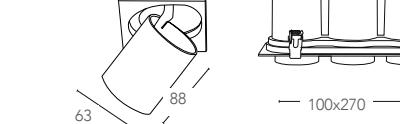

3X30W

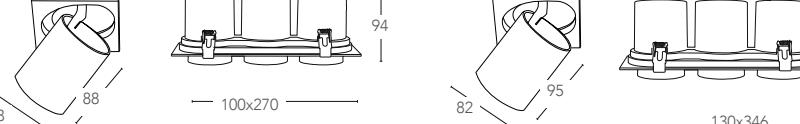

LYBRA



Faro ad incasso con orientabilità verticale
Recess spot light vertical orientability



Materiale

Alluminio

Material

Alluminium

Colore

Bianco satinato riflettore silver

Colour

Satin white and silver reflector

Sorgente luminosa

LED COB 30W

Light source

LED COB 30W

Driver

incluso

Driver

included

Temperatura colore

3200K

Colour temperature

3200K

Punti luce

1

Number of light sources

1

Lumen

1600 Lm

Luminous flux

1600 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Life time and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

99°

Beam angle

99°

CRI


>80

CRI

>80



DELTA

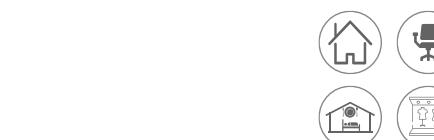

Faro incasso luce spot con testa estraibile e orientabile
Recess spot light with extractable head orientability



Materiale

Alluminio

Material

Alluminium

Colore

Bianco satinato riflettore silver

Color

Satin white and silver reflector

Sorgente luminosa

LED COB 8W - 20W - 33W

Light source

LED COB 8W - 20W - 33W

Driver

incluso

Driver

included

Temperatura colore

3200K

Color temperature

3200K

Punti luce

1

Number of light sources

1

Flusso luminoso

500 Lm - 1100 Lm - 2640 Lm

Luminous flux

500 Lm - 1100 Lm - 2640 Lm

Durata e on/off

25.000 h ~ >15.000 on/off
(>10.000 on/off 33W)

Life time and on/off

25.000 h ~ >15.000 on/off
(>10.000 on/off 33W)

Angolo di luce

68°, 24°

Beam angle

68°, 24°

CRI

>80

CRI

>80



80°

INC-LYBRA-30
8031434951226




Foro - cut out
220x132 mm

Potenza - power


30W

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF THE PRODUCT



INC-LYBRA-30

Misure - Size
dimensioni in mm - size mm

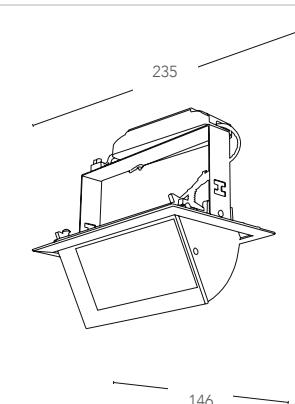

DELTA



Faro incasso luce spot con testa estraibile e orientabile
Recess spot light with extractable head orientability



Materiale

Alluminio

Material

Alluminium

Colore

Bianco satinato riflettore silver

Color

Satin white and silver reflector

Sorgente luminosa

LED COB 8W - 20W - 33W

Light source

LED COB 8W - 20W - 33W

Driver

incluso

Driver

included

Temperatura colore

3200K

Color temperature

3200K

Punti luce

1

Number of light sources

1

Flusso luminoso

500 Lm - 1100 Lm - 2640 Lm

Luminous flux

500 Lm - 1100 Lm - 2640 Lm

Durata e on/off

25.000 h ~ >15.000 on/off
(>10.000 on/off 33W)

Life time and on/off

25.000 h ~ >15.000 on/off
(>10.000 on/off 33W)

Angolo di luce

68°, 24°

Beam angle

68°, 24°




CRI

>80

CRI

>80

INC-DELTA-8 8031434921229	8W	500 LM	68°
INC-DELTA-20 803143491228	20W	1100 LM	68°
INC-DELTA-30 8031434941227	33W	2640 LM	0,90, 24°

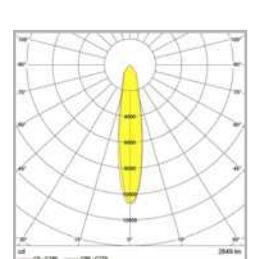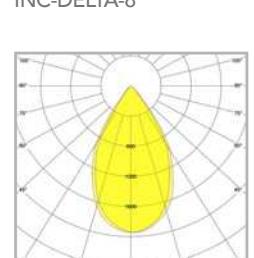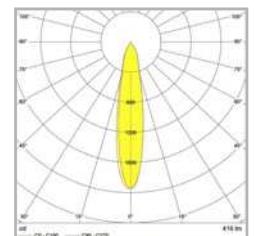

Potenza - power

8W

20W

33W

Foro - cut out

dimensioni in mm - size mm



Misure - Size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



Misure - Size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm

FIBRA OTTICA

Kit fibra ottica

LED optical fiber kit

**Materiale**

Fibra ottica traslucente

Material

Translucent optical fiber

Sorgente luminosa**Light source**

16W

16W

Driver**Driver**

incluso

included

Temperatura colore**Colour temperature**

RGB + 4000K

RGB + 4000K

**Punti luce****Number of light sources**

100

100

Dimmer**Dimmer**

Dimmerabile con radiocomando

Dimmable with remote control

Durata e on/off**Life time and on/off**




25.000 h ~ >10.000 on/off

25.000 h ~ >10.000 on/off

CRI**CRI**

>80

>80

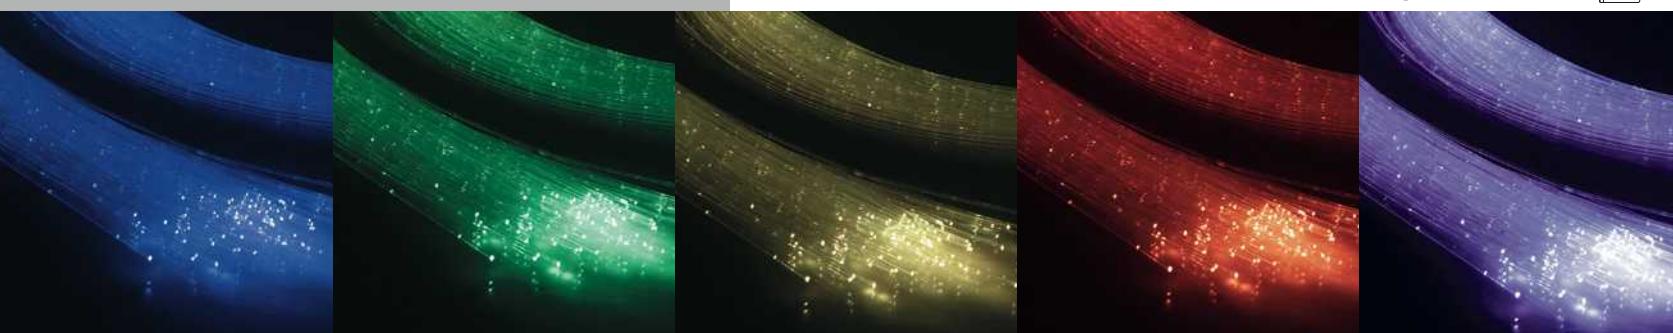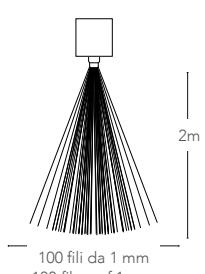FIBRAOTTICA-LED-RGB
8031436691236Accessori inclusi
included accessoriesMisure - Size
dimensioni in mm - size mmDriver
Radio controllerDriver
Radio controller

STARLIGHT



Mini faretto a incasso cielo stellato con ghiera di colore intercambiabile

Downlight for decorative starlight with interchangeable ring color

Materiale

Alluminio

Material

Alluminium

Colore

Bianco, argento

Colour

White, silver

Sorgente luminosa

LED 0,2W

Light source

LED 0,2W

Driver

NON INCLUSO

Driver

NOT INCLUDED

Temperatura colore

4000K, BLU

Colour temperature

4000K, BLU

Punti luce

1

Number of light sources

1

Flusso luminoso

11 Lm

Luminous flux

11 Lm

Durata e on/off

20.000 h ~ >15.000 on/off

Life time and on/off

20.000 h ~ >15.000 on/off

CRI

>80

CRI

>80



STARLIGHT 30



Mini faretto a incasso cielo stellato con ghiera di colore intercambiabile

Downlight for decorative starlight with interchangeable ring color

Materiale

Alluminio

Material

Alluminium

Sorgente luminosa

LED 30x0,2W

Light source

LED 30x0,2W

Driver

Driver 12V DC 100mA 6W

Driver

Driver 12V DC 100mA 6W

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

30

Number of light sources

30

Flusso luminoso

30x11Lm

Luminous flux

30x11Lm

Durata e on/off

20.000 h ~ >15.000 on/off

Life time and on/off

20.000 h ~ >15.000 on/off

CRI

>80

CRI

>80



LED-STARLIGHT-W
8031440361682 11 LM INCL. CAVO 1 M.
WITH 1M. CABLE

GHIERA SILVER INTERCAMBIABILE
INCLUDE
SILVER CHANGEABLE RING INCLUDED


LED-STARLIGHT-BLU
8031440361699 ● 11 LM INCL. CAVO 1 M.
WITH 1M. CABLE

GHIERA BIANCA INTERCAMBIABILE
INCLUDE
SILVER CHANGEABLE RING INCLUDED

Foro - cut out
dimensioni in mm - size mm




Misure - Size
dimensioni in mm - size mm



CONNESSIONE IN PARALLELO
PARALLEL CONNECTION

ACCESSORI STARLIGHT non inclusi



LED-STARLIGHT 0,2W



LED-STARLIGHT-NEX
8031440364430 SCATOLA CONNESSIONE PER 10 TESTE 12V DC 1A INCL. CAVO 1 M.
BOX CONNECTION FOR 10 PCS 12V DC 1A WITH 1MT. CABLE



LED-STARLIGHT-CONN
8031440364843 CONNETTORE CON SINGOLA ENTRATA 3 USCITE PER KIT CIELO STELLATO 12V DC 1A INCL.
CAVO 1 M.
CONNECTOR ONE INPUT THREE OUTPUT FOR STARLIGHT 12V DC 1A WITH 1M CABLE



LED-STARLIGHT-DR
8031440364447 DRIVER 12V DC 100MA 6W INCL. CAVO 1 M.
DRIVER 12V DC 100MA 6W WITH 1M CABLE




LED-STARLIGHT-30-W
8031440357692 330 LM INCL. CAVO 1 M.
WITH 1MT. CABLE

GHIERE SILVER INTERCAMBIABILI
INCLUDE
SILVER CHANGEABLE RINGS INCLUDED

GHIERE BIANCHE INTERCAMBIABILI
INCLUDE
SILVER CHANGEABLE RINGS INCLUDED


Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



ACCESSORI STARLIGHT 30 inclusi

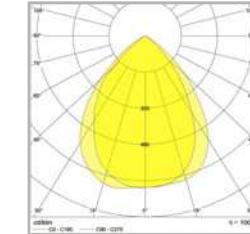

LED-STARLIGHT 0,2W



SCATOLA CONNESSIONE PER 10 TESTE 12V DC 1A INCL. CAVO 1 M.
BOX CONNECTION FOR 10 PCS 12V DC 1A WITH 1MT. CABLE



CONNETTORE CON SINGOLA ENTRATA 3 USCITE PER KIT CIELO STELLATO 12V DC 1A INCL. CAVO 1 M.
CONNECTOR ONE INPUT THREE OUTPUT FOR STARLIGHT 12V DC 1A WITH 1M CABLE



DRIVER 12V DC 100MA 6W INCL. CAVO 1 M.
DRIVER 12V DC 100MA 6W WITH 1M CABLE

SIRIO



Incasso in lega d'alluminio

Aluminium alloy recessed light

Icone:



Materiale

Alluminio

Material

Aluminium alloy

Colore

Nikel spazzolato

Colour

Brushed nickel

Sorgente luminosa

LED 1W

Light source

LED 1W

Driver

350mA 3,5V corrente costante
non incluso

Driver

350mA 3,5V constant current
not included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Flusso luminoso

50 Lm

Luminous flux

50 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Life time and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

30°

Beam angle

30°

CRI

>80

CRI

>80



SIRIO KIT 3



Incasso in lega d'alluminio

Aluminium alloy recessed light

Icone:



Materiale

Alluminio

Material

Aluminium alloy

Colore

Nikel spazzolato

Colour

Brushed nickel

Sorgente luminosa

LED 3x1W

Light source

LED 3x1W

Driver

incluso 3W 350mA 12V

Driver

included 3W 350mA 12V

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

3

Number of light sources

3

Flusso luminoso

3x50Lm

Luminous flux

3x50Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Life time and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

30°

Beam angle

30°

CRI

>80

CRI

>80



INC-SIRIO-R1
8031433991216 50 LM 350MA 3,5V

INC-SIRIO-Q1
8031433961219 50 LM 350MA 3,5V

Modello

R

Q


Foro - cut out

dimensioni in mm - size mm




Misure - Size

dimensioni in mm - size mm

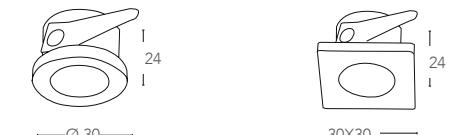

FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE
OF THE PRODUCT

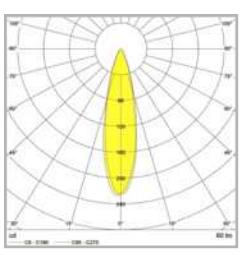

INC-SIRIO 1W

Accessori inclusi

Cavo 1m incluso
Included 1m cable

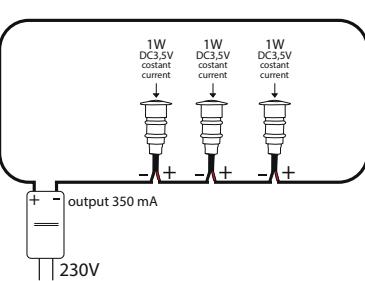


Connessione in serie Series connection system

Driver pag. 567
Driver page 567

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE
OF THE PRODUCT

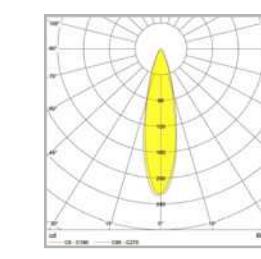

INC-SIRIO 1W

INC-SIRIO-R3
8031432071193 3X50 LM KIT 3 PZ
KIT 3 PCS DRIVER INCLUSO*
DRIVER INCLUDED*

INC-SIRIO-Q3
8031432061194 3X50 LM KIT 3 PZ
KIT 3 PCS DRIVER INCLUSO*
DRIVER INCLUDED*

Modello

R

Q


Foro - cut out

dimensioni in mm - size mm




Misure - Size

dimensioni in mm - size mm

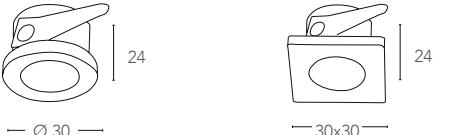

Accessori inclusi

Cavo 3x1m incluso
Included 3x1m cable
driver 3W 350mA 12V

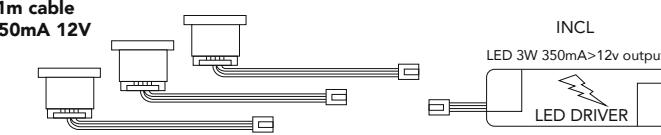

SIRIO



Incasso in lega d'alluminio

Aluminium alloy recessed light

Materiale

Alluminio

Material

Aluminium alloy

Colore

Bianco o nero groffato

Colour

Embossed white or black

Sorgente luminosa

LED 1W

Light source

LED 1W

Driver

350mA 3,5V corrente costante
non incluso

Driver

350mA 3,5V constant current
not included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Flusso luminoso

100 Lm

Luminous flux

100 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Life time and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

30°

Beam angle

30°

CRI

>80

CRI

>80

CLASSE A CE EMC


INC-SIRIO-R2 BCO
8031414870790

INC-SIRIO-R2 NER
8031414870806

INC-SIRIO-Q2 BCO
8031414870813

INC-SIRIO-Q2 NER
8031414870820

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

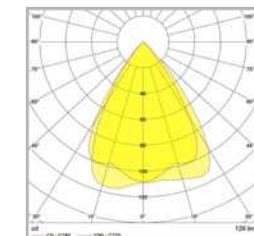

Accessori inclusi

Cavo 1m incluso
Included 1m cable



Modello

R2

Q2

Foro - cut out

dimensioni in mm - size mm

Ø 28

Ø 28


Misure - Size

dimensioni in mm - size mm

Ø 35

35x35

Connessione in serie
Series connection system

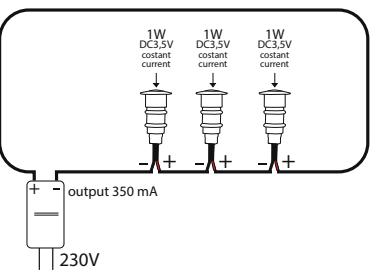

ASSO



Faretto incasso

Recessed light

Materiale

Material

Material

Alluminio

Aluminium alloy

Colore

Colour

Bianco

White

Sorgente luminosa

Light source

LED 1W

LED 1W

Driver

Driver

DC24V tensione costante
non incluso

DC24V constant voltage
not included

Temperatura colore

Colour temperature

3000K 4000K BLU

3000K 4000K BLU

Flusso luminoso

Luminous flux

80 Lm

80 Lm

Durata e on/off

Life time and on/off

25.000 h ~ >15.000 on/off

25.000 h ~ >15.000 on/off

Angolo di luce

Beam angle

30°

30°

CRI

CRI

>80

>80

CLASSE A CE EMC

INC-ASSO-R30M
8031414877928

80 LM 24V

INC-ASSO-R30C
8031414877829

80 LM 24V

INC-ASSO-R30-BLU
8031414877935

-- 24V

Foro - cut out

dimensioni in mm - size mm

Ø 25



Misure - Size

dimensioni in mm - size mm

Ø 32


22

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

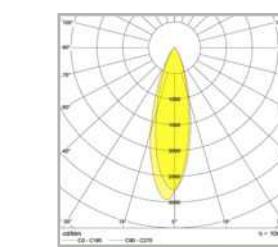

Accessori inclusi

Cavo 1m incluso
Included 1m cable

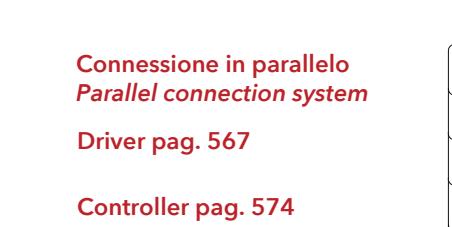

Connessione in parallelo
Parallel connection system

Driver pag. 567

Controller pag. 574

SINKRO



Incasso lineare antiriflesso in alluminio pressofuso

Die-cast aluminium anti-glare linear down-light

Materiale

Alluminio pressofuso

Material

Diecast aluminium

Colore finitura

Bordo bianco e interno nero lucido

Finiture colour

White and glossy black inside

Sorgente luminosa

LED COB 2W, 5x2W, 10x2W

Light source

LED COB 2W, 5x2W, 10x2W

Driver

incluso

Driver

included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1 - 5 - 10

Number of light sources

1 - 5 - 10

Flusso luminoso

160 Lm - 800 Lm - 1600 Lm

Luminous flux

160 Lm - 800 Lm - 1600 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Life time and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

45°

Beam angle


45°

CRI


>80

CRI


>80

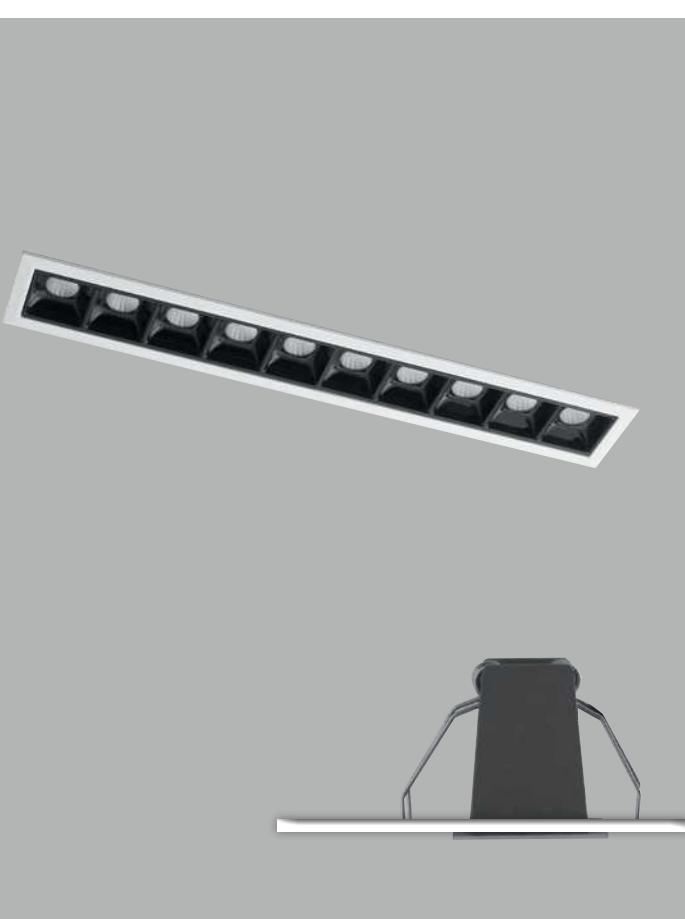


FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT




INC-SINKRO-2M



INC-SINKRO-10M



INC-SINKRO-20M

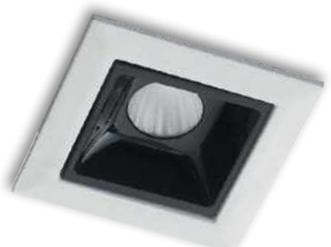


SINKRO


INC-SINKRO-2M
8031440360876

2W 160 LM

Misure - Size
dimensioni in mm - size mm

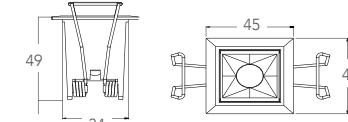


Foro - cut out
dimensioni in mm - size mm




INC-SINKRO-10M
8031440360890

5X2W 800 LM

Misure - Size
dimensioni in mm - size mm

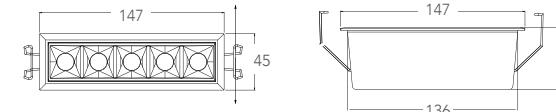


Foro - cut out
dimensioni in mm - size mm




INC-SINKRO-20M
8031440360906

10X2W 1600 LM

Misure - Size
dimensioni in mm - size mm

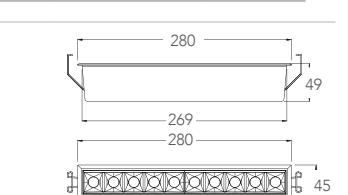

Foro - cut out
dimensioni in mm - size mm



ELITE



Incasso antiriflesso luce spot orientabile

Orienteable recessed spot light anti-glare

Materiale

Alluminio

Colore

Bianco goffrato

Sorgente luminosa

LED COB 10W - 20W - 30W - 45W

Driver

incluso

Temperatura colore

3000K - 4000K



Punti luce

1

Flusso luminoso

800 Lm - 1600 Lm - 2400 Lm - 3600Lm

Durata e on/off

40.000 h ~ >20.000 on/off

Angolo di luce

40°

CRI

>80

Material

Alluminium

Colour

Embossed white

Light source

COB LED 10W - 20W - 30W - 45W

Driver

included

Colour temperature

3000K - 4000K



Number of light sources

1

Luminous flux

80 Lm - 1600 Lm - 2400 Lm - 3600Lm

Life time and on/off

40.000 h ~ >20.000 on/off

Beam angle

40°


CRI

>80




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT




INC-ELITE-1X10



INC-ELITE-1X20



INC-ELITE-1X30



INC-ELITE-1X45

ELITE



INC-ELITE-1X10C 10W 800 LM
8031440363396


INC-ELITE-1X10M 10W 800 LM
8031440363365

INC-ELITE-1X20C 20W 1600 LM
8031440363372

INC-ELITE-1X20M 20W 1600 LM
8031440363341

Potenza - power	10W	20W
Foro - cut out dimensioni in mm - size mm	Ø 95	Ø 107

Misure - Size dimensioni in mm - size mm	10W	20W
	106	135
	Ø 108	Ø 127

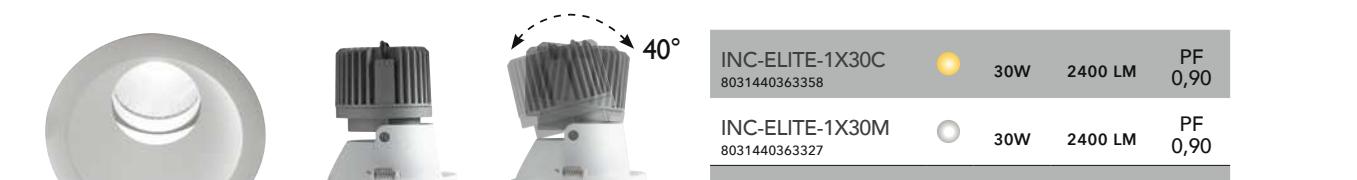

INC-ELITE-1X30C 30W 2400 LM PF 0,90
8031440363358

INC-ELITE-1X30M 30W 2400 LM PF 0,90
8031440363327


INC-ELITE-1X45C 45W 3600 LM PF 0,90
8031440363334

INC-ELITE-1X45M 45W 3600 LM PF 0,90
8031440363303

Potenza - power	30W	45W
Foro - cut out dimensioni in mm - size mm	Ø 150	Ø 150

Misure - Size dimensioni in mm - size mm	30W	45W
	160	160
	Ø 168	Ø 168

LANDER

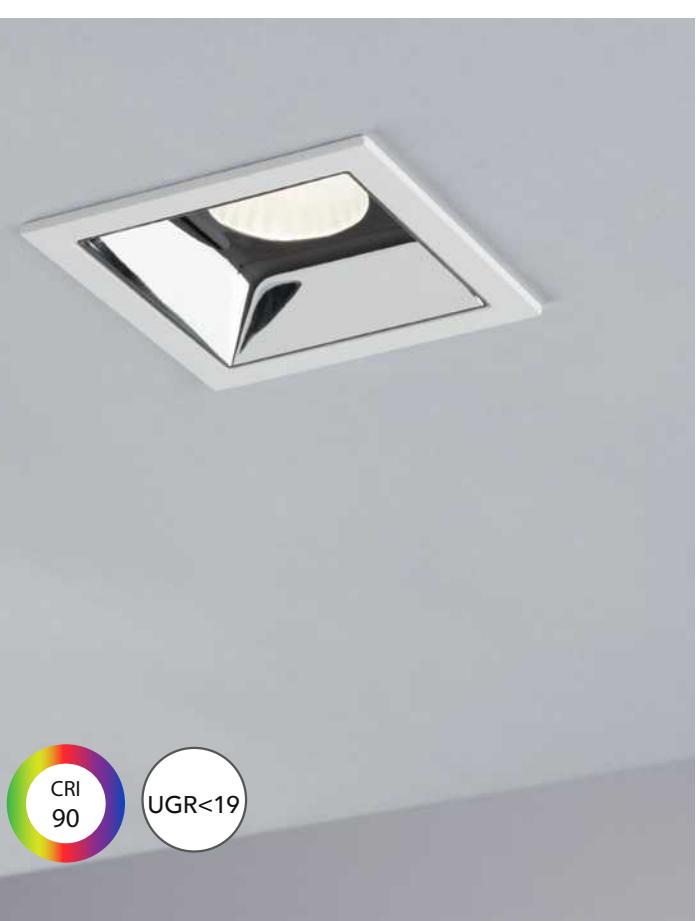

LANDER

Incasso in alluminio anti abbagliamento

Alluminium down light anti-glare

Materiale

Alluminio

Colore

Bianco con riflettore cromato
Nero con riflettore nero lucido

Sorgente luminosa

LED COB 15W - 30W

Driver

incluso

Temperatura colore

4000K - 3000K

Punti luce

1

UGR

<19

Flusso luminoso

1500 Lm - 3000 Lm

Durata e on/off

50.000 h ~ >25.000 on/off

Angolo di luce

35°

CRI

90

Material

Alluminium

Colour

White with chrome reflector
Black with shine black reflector

Light source

LED COB 15W - 30W

Driver

included

Colour temperature

4000K - 3000K

Number of light sources

1

UGR

<19

Luminous flux

1500 Lm - 3000 Lm

Life time and on/off

50.000 h ~ >25.000 on/off

Beam angle

35°


CRI

90




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT




INC-LANDER-Q 15W



INC-LANDER-Q 30W



INC-LANDER-R 15W



INC-LANDER-R 30W

LANDER



INC-LANDER-Q15 BCO
8031414866625

15W 1500 LM

INC-LANDER-Q15 NER
8031414866465

15W 1500 LM

INC-LANDER-Q30 BCO
8031414866601

30W 3000 LM PF 0,90


INC-LANDER-Q30 NER
8031414866618

30W 3000 LM PF 0,90

Potenza - power
15W



Foro - cut out
dimensioni in mm - size mm

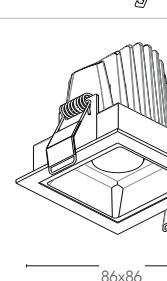

Misure - Size
dimensioni in mm - size mm

INC-LANDER-Q15 C BCO
8031414874040

15W 1500 LM

INC-LANDER-Q15 C NER
8031414874002

15W 1500 LM


INC-LANDER-Q30 C BCO
8031414873999

30W 3000 LM PF 0,90

INC-LANDER-Q30 C NER
8031414873982

30W 3000 LM PF 0,90

30W

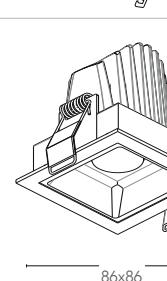

INC-LANDER-R15 BCO
8031414866564

15W 1500 LM

INC-LANDER-R15 NER
8031414866434

15W 1500 LM


INC-LANDER-R30 BCO
8031414866540

30W 3000 LM PF 0,90

INC-LANDER-R30 NER
8031414866595

30W 3000 LM PF 0,90

Potenza - power
15W



Foro - cut out
dimensioni in mm - size mm

INC-LANDER-R15 C BCO
8031414869053

15W 1500 LM

INC-LANDER-R15 C NER
8031414873944


15W 1500 LM

INC-LANDER-R30 C BCO
8031414873937


30W 3000 LM PF 0,90

INC-LANDER-R30 C NER
8031414873920

30W 3000 LM PF 0,90

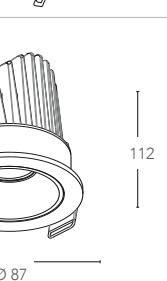

Misure - Size
dimensioni in mm - size mm



XANTO



Incasso in alluminio pressofuso antiriflesso

Materiale

Alluminio pressofuso

Colore

Bianco satinato

Sorgente luminosa

LED SMD 12W - 18W - 30W

Driver

incluso

Temperatura colore

4000K - 5000K - 3000K

Diecast aluminium anti-glare down-light

Material

Die cast aluminium

Colour

Satin white color

Light source

LED SMD 12W - 18W - 30W

Driver

included

Colour temperature

4000K - 5000K - 3000K

Punti luce

1

Flusso luminoso

● 960 Lm	- ● 980 Lm	- ● 1000 Lm
● 1500 Lm	- ● 1550Lm	- ● 1600 Lm
● 2700 Lm	- ● 2800 Lm	- ● 2900 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Angolo di luce

98°

CRI

>80

Number of light sources

1

Luminous flux

● 960 Lm	- ● 980 Lm	- ● 1000 Lm
● 1500 Lm	- ● 1550Lm	- ● 1600 Lm
● 2700 Lm	- ● 2800 Lm	- ● 2900 Lm

Life time and on/off

25.000 h ~ >15.000 on/off

Beam angle

98°


CRI

>80




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT




INC-XANTO-M-R120




INC-XANTO-M-R154




INC-XANTO-M-R220




INC-XANTO-F-R120




INC-XANTO-F-R154




INC-XANTO-F-R220



INC-XANTO-C-R120



INC-XANTO-C-R154



INC-XANTO-C-R220

XANTO



INC-XANTO-M-R120
8031414861224

12W 980 Lm

INC-XANTO-F-R120
8031414861163

12W 1000 Lm

INC-XANTO-C-R120
8031414861101

12W 960 Lm


Misure - Size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



INC-XANTO-M-R154
8031414861231

18W 1550 Lm

INC-XANTO-F-R154
8031414861170


18W 1600 Lm

INC-XANTO-C-R154
8031414861118

18W 1500 Lm


Misure - Size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



INC-XANTO-M-R220
8031414861248

30W 2800 Lm PF 0,90

INC-XANTO-F-R220
8031414861187

30W 2900 Lm PF 0,90

INC-XANTO-C-R220
8031414861125

30W 2700 Lm PF 0,90


Misure - Size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



Incasso in alluminio pressofuso con funzione smart Wi-Fi, RF2.4G compatibili con dispositivi VOICE CONTROL

Diecast aluminium down light with smart Wi-Fi function, RF2.4G compatible with VOICE CONTROL


**SMART INTEC
Wi-Fi**

Materiale

Alluminio pressofuso

Material

Die cast aluminium

Sorgente luminosa

LED RGB+CCT 12W - 30W

Light source

LED RGB+CCT 12W - 30W

Driver

incluso

Driver

included

Temperatura colore

Color temperature

Punti luce

1

Light spot

1

Flusso

810-900 Lm - 1632-1944 Lm

Luminous flux

810-900 Lm - 1632-1944 Lm

Durata e on/off

25.000 h ~ >12.500 on/off

Lifetime and on/off

25.000 h ~ >12.500 on/off

Angolo di luce

98°

Light angle

98°

CRI

>80

CRI

>80


 INC-XANTO-R120-INT
8031414872695

12W 810-900LM

 INC-XANTO-R220-INT
8031414868643

30W 1632-1944 LM PF 0,90

non incluso - not included



 RADIOCOMANDO-RF
8031414872725

 Radiocomando RF 2.4G - controllo gruppi
RF 2.4G remote control - control groups

**CONTROL SYSTEM
EASY INSTALLATION**





SMART INTEC

 Powered by
tuya
Intelligence Inside

**VOICE CONTROL
ALEXA E GOOGLE HOME**

Potenza - power


12W

30W


 Foro - cut out
dimensioni in mm - size mm

 Misure - Size
dimensioni in mm - size mm

**RF 2.4G
CONTROL
SYSTEM**

 non incluso
not included

**FOTOMETRIA DEL
PRODOTTO**

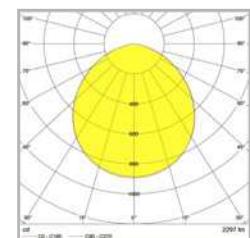 PHOTOMETRIC CURVE OF
THE PRODUCT


INC-XANTO-R120-INT



INC-XANTO-R220-INT



XANTO



Incasso in alluminio pressofuso antiriflesso

Diecast aluminium anti-glare down-light



Materiale

Alluminio pressofuso

Colore

Bianco satinato

Sorgente luminosa

LED SMD 12W - 18W - 30W

Driver

incluso

Temperatura colore

3000K - 4000K - 5000K

Punti luce

1

Flusso luminoso

● 960 Lm - ● 980 Lm - ● 1000 Lm
● 1500 Lm - ● 1550Lm - ● 1600 Lm
● 2700 Lm - ● 2800 Lm - ● 2900 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Angolo di luce

98°

CRI

>80

Material

Die cast aluminium

Colour

Satin white color

Light source

LED SMD 12W - 18W - 30W

Driver

included

Colour temperature

3000K - 4000K - 5000K

Number of light sources

1

Luminous flux

● 960 Lm - ● 980 Lm - ● 1000 Lm
● 1500 Lm - ● 1550Lm - ● 1600 Lm
● 2700 Lm - ● 2800 Lm - ● 2900 Lm

Life time and on/off

25.000 h ~ >15.000 on/off

Beam angle

98°


CRI

>80




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT




INC-XANTO-M-Q120




INC-XANTO-M-Q145

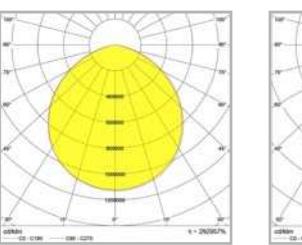


INC-XANTO-M-Q220

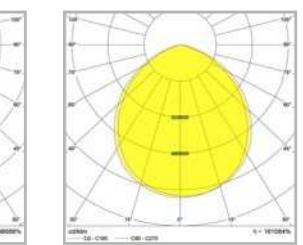


INC-XANTO-F-Q120




INC-XANTO-F-Q145



INC-XANTO-C-Q120



INC-XANTO-C-Q145



INC-XANTO-C-Q220

XANTO



INC-XANTO-M-Q110
8031414861194

12W 980 Lm


INC-XANTO-F-Q110
8031414861132

12W 1000 Lm


INC-XANTO-C-Q110
8031414861071

12W 960 Lm

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-XANTO-M-Q145
8031414861200

18W 1550 Lm


INC-XANTO-F-Q145
8031414861149

18W 1600 Lm

INC-XANTO-C-Q145
8031414861088

18W 1500 Lm

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-XANTO-M-Q220
8031414861217

30W 2800 Lm PF 0,90


INC-XANTO-F-Q220
8031414861156

30W 2900 Lm PF 0,90


INC-XANTO-C-Q220
8031414861095

30W 2700 Lm PF 0,90

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



MACK



Incasso in policarbonato anti abbagliamento

Materiale

PC

Colore

Bianco con riflettore cromato

Sorgente luminosa

LED SMD 15W - 20W - 25W

Driver

integrato

Temperatura colore

3000K - 4000K



Punti luce

1

UGR

<19

Flusso luminoso

● 1350 Lm - 1800 Lm - 2250 Lm
● 1500 Lm - 2000 Lm - 2500 Lm

Durata e on/off

25.000 h ~ >12.500 on/off

Angolo di luce

75°

CRI

>80

Diecast polycarbonate anti-glare down-light

Material

PC

Colour

White with chrome reflector

Light source

LED SMD 15W - 20W - 25W

Driver

built-in

Colour temperature

3000K - 4000K



Number of light sources

1



MACK




INC-MACK-15
8031414867974

15W 1500 Lm UGR<19


INC-MACK-15C
8031414873913

15W 1350 Lm UGR<19

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm




INC-MACK-20
8031414867981

20W 2000 Lm UGR<19

INC-MACK-20C
8031414873906

20W 1800 Lm UGR<19

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm




INC-MACK-25
8031414867998

25W 2500 Lm UGR<19


INC-MACK-25C
8031414873890

25W 2250 Lm UGR<19

Misure - Size
dimensioni in mm - size mm




Foro - cut out
dimensioni in mm - size mm




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT



INC-MACK 15W




INC-MACK 20W



INC-MACK 25W



TRON

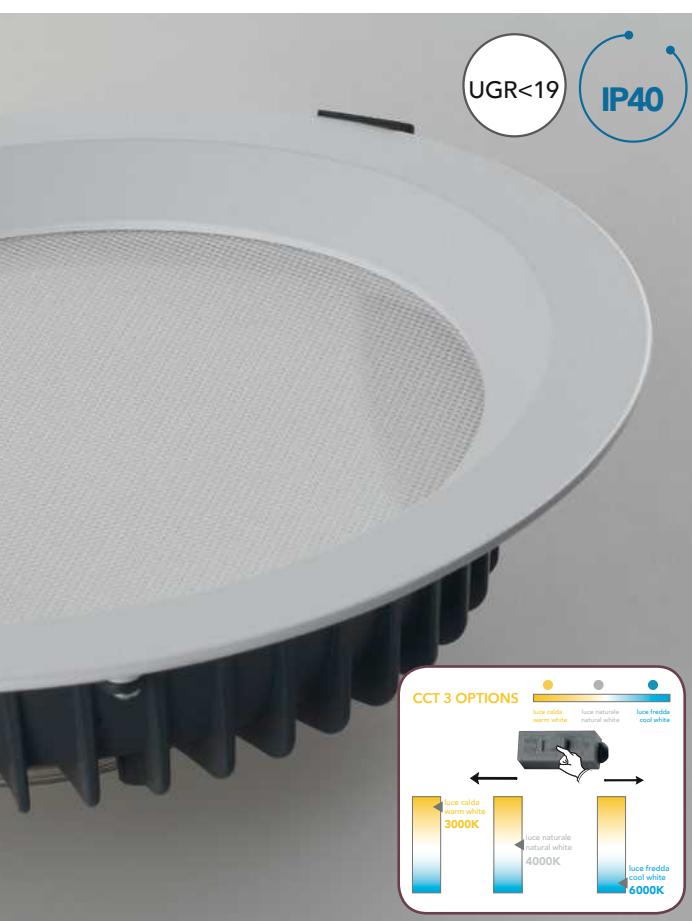

Incasso con interruttore per regolazione kelvin

Materiale

Struttura in alluminio diffusore in acrilico

Colore finitura

Bianco opaco

Sorgente luminosa

LED SMD 7W - 20W - 30W

UGR

<19

Driver

incluso

Temperatura colore



Punti luce

1

Flusso luminoso

770 Lm - 2200 Lm - 3280 Lm

Durata e on/off




30.000h >15.000on/off

Angolo di luce

120°


CRI

>85

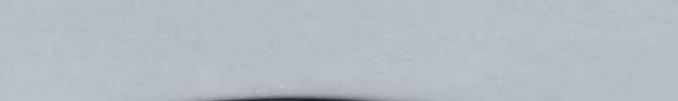

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

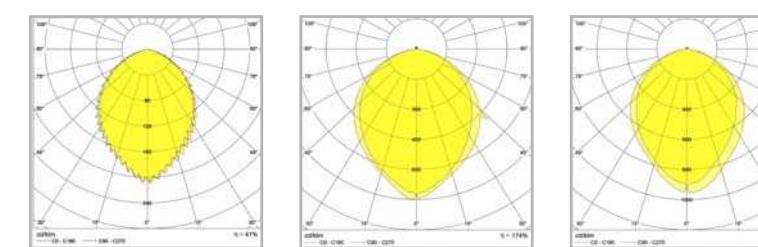

INC-TRON-7

INC-TRON-20

INC-TRON-30


TRON




INC-TRON-7
8031414876198

CCT 7W 770 LM

Misure - Size
dimensioni in mm - size mm




Foro - cut out
dimensioni in mm - size mm




INC-TRON-20
8031414876204

CCT 20W 2200 LM PF 0,90

Misure - Size
dimensioni in mm - size mm




Foro - cut out
dimensioni in mm - size mm





INC-TRON-30
8031414876211

CCT 30W 3280 LM PF 0,90

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



BLINK-EYES



SMART INTEC
Bluetooth
Sig mesh



Incasso in policarbonato

Diecast polycarbonate down-light

Materiale

Policarbonato

Material

Polycarbonate

Colore

Bianco matto

Colour

Matt white

Sorgente luminosa

LED SMD 9W

Light source

LED SMD 9W

Driver

Integrato

Driver

Built-in

Temperatura colore



Colour temperature



Punti luce

1

Number of light sources

1

Flusso luminoso

700Lm 740Lm 750Lm

Luminous Flux

700Lm 740Lm 750Lm

Durata e on/off

25.000h >12.500 on/off

Lifetime and on/off

25.000h >12.500 on/off

Angolo di luce

96°

Beam angle

96°

CRI


>80

CRI

>80



SLIM-INT

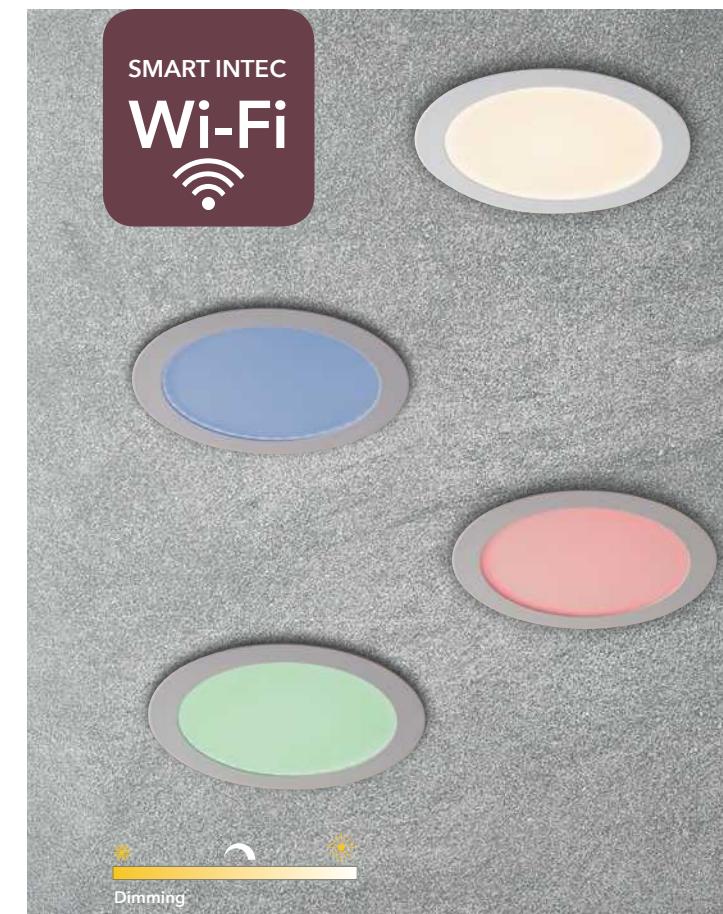

Incasso in alluminio pressofuso con funzione smart Wi-Fi, RF2,4G compatibili con dispositivi VOICE CONTROL

Diecast aluminium down light with smart Wi-Fi function, RF2,4G compatible with VOICE CONTROL

Materiale

Struttura in alluminio diffusore in acrilico

Material

Alluminium structure , acrylic diffuser

Colore

Bianco satinato

Colour

Satin white

Sorgente luminosa

LED SMD 6W - 18W

Light source

LED SMD 6W - 18W

Driver

incluso

Driver

included

Temperatura colore



Color temperature



Punti luce

1

Light spot

1

Flusso

310-350 Lm - 643-794 Lm

Luminous flux

310-350 Lm - 643-794 Lm

Durata e on/off

25.000 h ~ >12.500 on/off

Life time and on/off

25.000 h ~ >12.500 on/off

Angolo di luce

120°

Light angle

120°

CRI

>80

CRI

>80



INC-SLIM/6W-INT
8031414872701

6W 310-350LM

INC-SLIM/18W-INT
8031414868612

18W 643-794 LM

non incluso - not included

RADIOCOMANDO-RF
8031414872725

Radiocomando RF 2.4G - controllo gruppi
RF 2.4G remote control - control groups



INC-EYES-BT
8031414877881

9W RGB CCT

INC-BLINK-BT
8031414877911

9W RGB CCT

Foro - cut out

dimensioni in mm - size mm

Ø 90

Misure - Size


dimensioni in mm - size mm

65

Ø 115

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

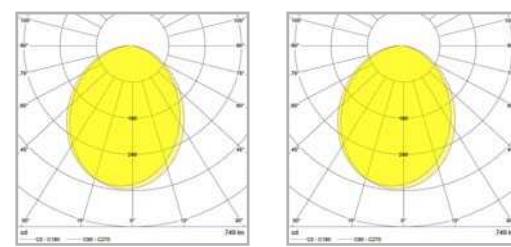

INC-EYES-BT

INC-BLINK-BT



Potenza

6W

18W

Foro

Ø 105

Ø 210


Misure

Ø 120

Ø 225

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

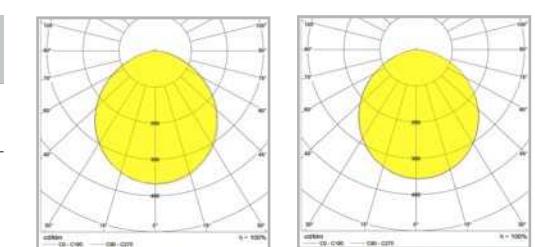

INC-SLIM/6W-INT

INC-SLIM/18W-INT

SLIM

Incasso in alluminio ultrasottile



Materiale

Alluminio pressofuso

Colore

Bianco - nikel

Sorgente luminosa

LED SMD 8W - 12W - 18W - 24W

Driver

incluso

Temperatura colore

3000K - 4000K - 6500K

Punti luce

1

Flusso luminoso

460 Lm	460 Lm	460 Lm
960 Lm	960 Lm	960 Lm
1520 Lm	1520 Lm	1520 Lm
2040 Lm	2040 Lm	2040 Lm

Durata e on/off

15.000 h ~ 7500 on/off

Angolo di luce

120°

CRI

>80

Aluminium ultra slim down light

Material

Die cast aluminium

Colour

White - nikel

Light source

LED SMD 8W - 12W - 18W - 24W

Driver

included

Colour temperature

3000K - 4000K - 6500K

Number of light sources

1

Luminous flux

460 Lm	460 Lm	460 Lm
960 Lm	960 Lm	960 Lm
1520 Lm	1520 Lm	1520 Lm
2040 Lm	2040 Lm	2040 Lm

Life time and on/off

15.000 h ~ 7500 on/off

Beam angle

120°

CRI

>80

SLIM

INC-SLIM/8W BCO 8031440357203	8W	460 LM
----------------------------------	----	--------

INC-SLIM/8WF BCO 8031440357197	8W	460 LM
-----------------------------------	----	--------

INC-SLIM/8WC BCO 8031440357180	8W	460 LM
-----------------------------------	----	--------

INC-SLIM/12W BCO 8031431491183	12W	960 LM
-----------------------------------	-----	--------

INC-SLIM/12WF BCO 8031440357234	12W	960 LM
------------------------------------	-----	--------

INC-SLIM/12WC BCO 8031440357258	12W	960 LM
------------------------------------	-----	--------

INC-SLIM/12W NIK 8031431501189	12W	960 LM
-----------------------------------	-----	--------

INC-SLIM/18W BCO 8031431511188	18W	1520 LM
-----------------------------------	-----	---------

INC-SLIM/18WF BCO 8031440357210	18W	1520 LM
------------------------------------	-----	---------

INC-SLIM/18WC BCO 8031440357227	18W	1520 LM
------------------------------------	-----	---------

INC-SLIM/18W NIK 8031431521187	18W	1520 LM
-----------------------------------	-----	---------


INC-SLIM/24W BCO 8031440364720	24W	2040 LM
-----------------------------------	-----	---------

INC-SLIM/24WF BCO 8031440364713	24W	2040 LM
------------------------------------	-----	---------

INC-SLIM/24WC BCO 8031440364706	24W	2040 LM
------------------------------------	-----	---------

INC-SLIM/24W NIK 8031440364775	24W	2040 LM
-----------------------------------	-----	---------

Potenza - power	8W	12W	18W	24W
Foro - cut out dimensioni in mm - size mm	Ø 110	Ø 156	Ø 205	Ø 220
Misure - Size dimensioni in mm - size mm	Ø 120 18,5	Ø 170 18,5	Ø 225 18,5	Ø 240 18,5

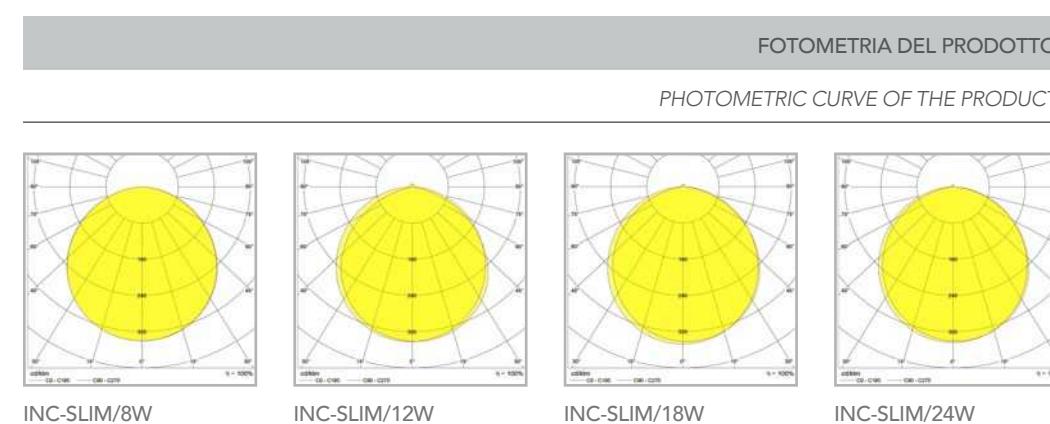

INC-SLIM/8W

INC-SLIM/12W

INC-SLIM/18W

INC-SLIM/24W

FLAP



Incasso in alluminio ultrasottile

Aluminium ultra slim down light



Materiale

Alluminio pressofuso

Colore

Bianco opaco

Sorgente luminosa

LED SMD 8W - 12W - 18W

Driver

incluso

Temperatura colore

3000K - 4000K - 5500K

Punti luce

1

Flusso luminoso

● 450 Lm	● 480 Lm	● 480 Lm
● 750 Lm	● 800 Lm	● 800 Lm
● 1300 Lm	● 1400 Lm	● 1400 Lm

Durata e on/off

15.000 h ~ 7500 on/off

Angolo di luce

120°

CRI

>80

Material

Die cast aluminium

Colour

Satin white

Light source

LED SMD 8W - 12W - 18W

Driver

included

Colour temperature

3000K - 4000K - 5500K

Number of light sources

1

Luminous flux

● 450 Lm	● 480 Lm	● 480 Lm
● 750 Lm	● 800 Lm	● 800 Lm
● 1300 Lm	● 1400 Lm	● 1400 Lm

Life time and on/off

15.000 h ~ 7500 on/off

Beam angle

120°

CRI

>80

FLAP



INC-FLAP/8WM 8031440363402	● 8W	480 LM
-------------------------------	------	--------

INC-FLAP/8WF 8031440363389	● 8W	480 LM
-------------------------------	------	--------

INC-FLAP/8WC 8031440363419	● 8W	450 LM
-------------------------------	------	--------




INC-FLAP/12W 8031431441188	● 12W	800 LM
-------------------------------	-------	--------

INC-FLAP/12WF 8031440357265	● 12W	800 LM
--------------------------------	-------	--------


INC-FLAP/12WC 8031440354615	● 12W	750 LM
--------------------------------	-------	--------

FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT



INC-FLAP 8W



INC-FLAP 12W



INC-FLAP 18W



INC-FLAP/18W 8031431451187	● 18W	1400 LM
-------------------------------	-------	---------

INC-FLAP/18WF 8031440357241	● 18W	1520 LM
--------------------------------	-------	---------

INC-FLAP/18WC 8031440357272	● 18W	1300 LM
--------------------------------	-------	---------

● 6500K

Potenza - power




8W

12W

18W




Foro - cut out

dimensioni in mm - size mm



Misure - Size

dimensioni in mm - size mm



PLUS



Incasso in alluminio con bordo effetto plafoniera

Materiale

Struttura in alluminio diffusore in acrilico

Colore

Bianco opaco

Sorgente luminosa

LED SMD 8W - 20W - 30W

Driver

incluso

Temperatura colore

4000K

Punti luce

1

Flusso luminoso

800 Lm - 2200 Lm - 3300 Lm

Durata e on/off

30.000h >15.000on/off

Angolo di luce

120°

CRI

>85

Aluminium recessed light with surface mount edge effect

Material

Aluminium structure , acrylic diffuser

Colour

Satin white

Light source

LED SMD 8W - 20W - 30W

Driver

included

Colour temperature

4000K

Number of light sources

1

Luminous flux

800 Lm - 2200 Lm - 3300 Lm

Life time and on/off

30.000h >15.000on/off

Beam angle

120°

CRI

>85




PLUS




INC-PLUS-R8M
8031414876105

8W 800 LM

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm




INC-PLUS-R20M
8031414876136

20W 2200 LM

Misure - Size
dimensioni in mm - size mm




Foro - cut out
dimensioni in mm - size mm




INC-PLUS-R30M
8031414876167

30W 3300 LM PF 0,90

Misure - Size
dimensioni in mm - size mm




Foro - cut out
dimensioni in mm - size mm




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT



INC-PLUS-R8M



INC-PLUS-R20M



INC-PLUS-R30M

MIZAR

Incasso orientabile in policarbonato

Materiale

PC



Colore

Bianco

Sorgente luminosa

LED SMD 3W - 6,5W - 15W

Driver

integrato

Temperatura colore

4000K

Punti luce

1

Flusso luminoso

240 Lm - 500 Lm - 1000 Lm

Durata e on/off

15.000 h ~ >10.000 on/off

Angolo di luce

38° - 45°

CRI

>80

Adjustable recessed light in polycarbonate

Material

PC

Colour

White

Light source

LED SMD 3W - 6,5W - 15W

Driver

built-in

Colour temperature

4000K

Number of light sources

1

Luminous flux

240 Lm - 500 Lm - 1000 Lm

Life time and on/off

15.000 h ~ >10.000 on/off

Beam angle

38° - 45°

CRI

>80



MIZAR




INC-MIZAR-R3 8031414866632	3W	38°	240 LM
-------------------------------	----	-----	--------


INC-MIZAR-R6 8031414866816	6,5W	38°	500 LM
-------------------------------	------	-----	--------

INC-MIZAR-R15 8031414866786	15W	45°	1000 LM
--------------------------------	-----	-----	---------

Modello	R3	R6	R15
---------	----	----	-----



Modello	Q3	Q6	Q15
---------	----	----	-----

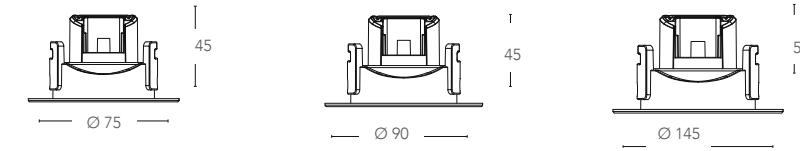


INC-MIZAR-Q3 803141486649	3W	38°	240 LM
------------------------------	----	-----	--------


INC-MIZAR-Q6 8031414866793	6,5W	38°	500 LM
-------------------------------	------	-----	--------

INC-MIZAR-Q15 8031414866755	15W	45°	1000 LM
--------------------------------	-----	-----	---------

Modello	Q3	Q6	Q15
---------	----	----	-----




Modello	Q3	Q6	Q15
---------	----	----	-----

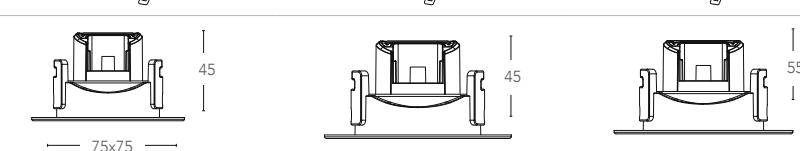

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

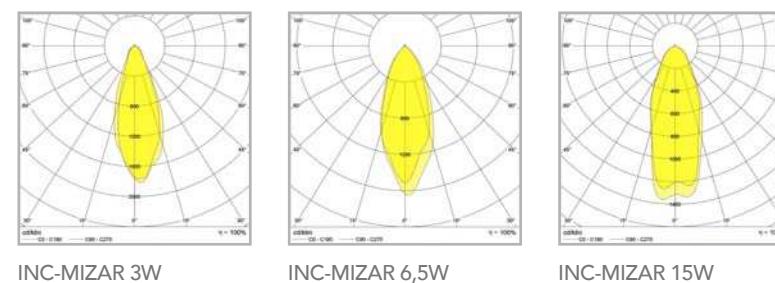

PLASMA



Incasso in alluminio bordo in vetro

Materiale

Bordo in vetro trasparente temperato con anello cromato

Colore

Cromato

Sorgente luminosa

LED SMD 12W- 18W

Driver

incluso

Temperatura colore

4000K

Punti luce

1

Flusso luminoso

900 Lm - 1400 Lm

Durata e on/off

25.000 h ~ 15.000 on/off

Angolo di luce

120°

CRI

>80

Aluminium recessed light with glass edge

Material

clear tempered glass edge whit chrome metal ring

Colour

Chrome

Light source

LED SMD 12W - 18W

Driver

included

Colour temperature

4000K

Number of light sources

1

Luminous flux

900 Lm - 1400 Lm

Life time and on/off

25.000 h ~ 15.000 on/off

Beam angle

120°

CRI

>80

POLARIS



Incasso in alluminio orientabile

Materiale

Alluminio

Colore

Bianco o silver goffrato

Sorgente luminosa

LED COB 3W

Driver

incluso

Temperatura colore

4000K

Punti luce

1

Flusso luminoso

240 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

24°

CRI

>80

Aluminium adjustable recessed light

Material

Alluminium

Colour

Embossed white or silver

Light source

LED COB 3W

Driver

included

Colour temperature

4000K

Number of light sources

1

Luminous flux

240 Lm

Life time and on/off

25.000 h ~ >10.000 on/off

Beam angle

24°

CRI

>80

CLASSE A+ CE EMC




INC-PLASMA-12W
8031440081276 12W 900 LM


INC-PLASMA-18W
8031440091275 18W 1400 LM

Potenza - power

12W





18W




Misure - Size

dimensioni in mm - size mm

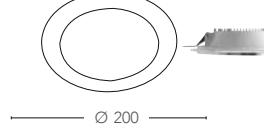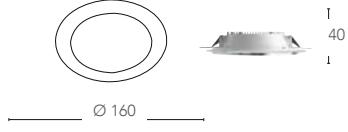

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

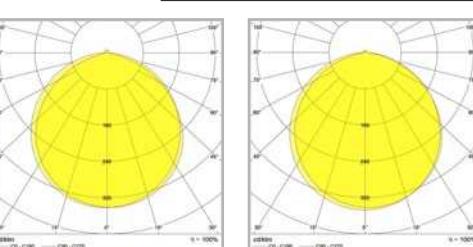

INC-PLASMA-12W INC-PLASMA-18W



INC-POLARIS-R3
8031432041196 240 LM

INC-POLARIS-R3 BCO
8031429681169 240 LM

Foro - cut out

dimensioni in mm - size mm




Misure - Size

dimensioni in mm - size mm



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

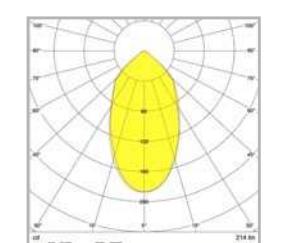

INC-POLARIS R3



INC-POLARIS-Q3
8031432051195 240 LM

INC-POLARIS-Q3 BCO
8031429761168 240 LM


Foro - cut out

dimensioni in mm - size mm




Misure - Size

dimensioni in mm - size mm



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

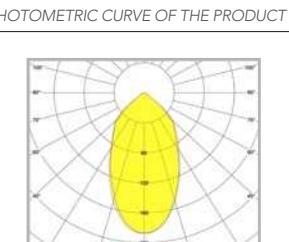

INC-POLARIS Q3

GEMINI



Incasso in alluminio orientabile

Aluminium adjustable recessed light



Materiale

Alluminio

Material

aluminium

Colore

Bianco o silver goffrato

Colour

Embossed white or silver

Sorgente luminosa

LED COB 2X5W

Light source

LED COB 2X5W

Driver

incluso

Driver

included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

2

Number of light sources

2

Flusso luminoso

630 Lm

Luminous flux

630 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Life time and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

87°

Beam angle

87°

CRI

>80

CRI

>80

CLASSE A CE EMC □

ORIONE



Incasso in alluminio orientabile

Aluminium adjustable recessed light



Materiale

Alluminio

Material

Alluminium

Colore

Bianco o silver goffrato

Colour

Embossed white or silver

Sorgente luminosa

LED COB 6W

Light source

LED COB 6W

Driver

incluso

Driver

included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Flusso luminoso

380 Lm

Luminous flux

380 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Life time and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

87°

Beam angle

87°

CRI

>80


CRI

>80

CLASSE A+ CE EMC □



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT



INC-GEMINI PL6


INC-GEMINI-PL6
803143201199 630 LM

INC-GEMINI-PL6 BCO
8031439191269 630 LM

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm

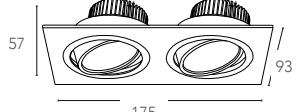

57

175

93

155x80




INC-ORIONE-R6
8031432021198

380 LM


INC-ORIONE-R6 BCO
8031429771167

380 LM

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm




INC-ORIONE-Q6
8031432031197

380 LM

INC-ORIONE-Q6 BCO
8031434361216

380 LM

Foro - cut out
dimensioni in mm - size mm




Misure - Size
dimensioni in mm - size mm




57

90x90

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT



INC-ORIONE Q6

POUND



Incasso in alluminio orientabile

Aluminium adjustable recessed light

Materiale

Alluminio

Material

Alluminium

Colore

Bianco - nikel

Colour

White - nikel

Sorgente luminosa

LED COB 5W

Light source

LED COB 5W

Driver

incluso

Driver

included

Temperatura colore

3200K - 5500K

Colour temperature

3200K - 5500K

Punti luce

1

Number of light sources

1

Flusso luminoso

● 320 Lm, ● 380 Lm

Luminous flux

● 320 Lm, ● 380 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Life time and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

87°

Beam angle

87°

CRI

>80

CRI

>80

CLASSE
A+ CE EMC □

KRONE



Incasso in alluminio orientabile

Aluminium adjustable recessed light

Materiale

Alluminio

Material

Alluminium

Colore

Bianco - nikel

Colour

White - nikel

Sorgente luminosa

LED COB 5W

Light source

LED COB 5W

Driver

incluso

Driver

included

Temperatura colore

3200K - 5500K

Colour temperature

3200K - 5500K

Punti luce

1

Number of light sources

1

Flusso luminoso

● 320 Lm, ● 380 Lm

Luminous flux

● 320 Lm, ● 380 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Life time and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

87°

Beam angle

87°

CRI

>80

CRI

>80

CLASSE
A+ CE EMC □



INC-POUND-5C BCO
8031435001227 320 LM


INC-POUND-5F BCO
8031435011226 380 LM

Foro - cut out
dimensioni in mm - size
mm

Misure - Size
dimensioni in mm - size
mm

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

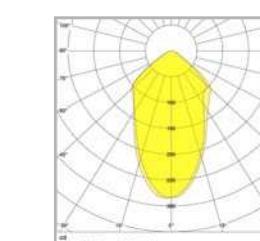

INC-POUND 5W



INC-POUND-5C NIK
8031435021225 320 LM

INC-POUND-5F NIK
8031435031224 380 LM

Foro - cut out
dimensioni in mm - size
mm

Misure - Size
dimensioni in mm - size
mm



INC-KRONE-5C BCO
8031434961225 320 LM


INC-KRONE-5F BCO
8031434971224 380 LM

Foro - cut out
dimensioni in mm - size
mm

Misure - Size
dimensioni in mm - size
mm

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

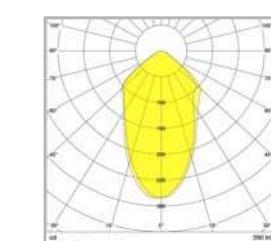

INC-KRONE-5C NIK
8031434981223 320 LM

INC-KRONE-5F NIK
8031434991222 380 LM

Foro - cut out
dimensioni in mm - size
mm

Misure - Size
dimensioni in mm - size
mm



FUSION



Incasso in alluminio

Aluminium recessed light



Materiale

Alluminio

Colore

Nikel - bianco satinato - oro

Sorgente luminosa

LED SMD 5W

Driver

integrato

Temperatura colore

4000K

Punti luce

1

Flusso luminoso

230 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Angolo di luce

120°

CRI

>80

Material

Alluminium

Colour

Nikel - satin white - gold finish

Light source

LED SMD 5W

Driver

built-in

Colour temperature

4000K

Number of light sources

1

Luminous flux

230 Lm

Life time and on/off

25.000 h ~ >15.000 on/off

Beam angle

120°

CRI

>80



FUSION



Incasso in alluminio

Aluminium recessed light



Materiale

Alluminio

Colore

Nikel - bianco satinato - oro

Sorgente luminosa

LED SMD 3x5W

Driver

integrato

Temperatura colore

4000K

Punti luce

3

Flusso luminoso

3x230 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Angolo di luce

120°

CRI

>80

Material

Alluminium

Colour

Nikel - satin white - gold finish

Light source

LED SMD 3x5W

Driver

built-in

Colour temperature

4000K

Number of light sources

3

Luminous flux

3x230 Lm

Life time and on/off

25.000 h ~ >15.000 on/off

Beam angle

120°

CRI


>80



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

INC-FUSION-5W NIK
8031440361705

5W 230 LM



INC-FUSION 5W


INC-FUSION-5W BCO
8031440361736

5W 230 LM


INC-FUSION-5W ORO
8031440361712

5W 230 LM

Misure - Size
dimensioni in mm - size mm




Foro - cut out
dimensioni in mm - size mm



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

INC-FUSION-3X5W NIK
8031440353342

3X5W 3X230 LM KIT 3 PZ



INC-FUSION 5W*


INC-FUSION-3X5W BCO
8031440353335

3X5W 3X230 LM KIT 3 PZ


INC-FUSION-3X5W ORO
8031440353359

3X5W 3X230 LM KIT 3 PZ

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



BLITZ



Lampada sottopensile kit 3 pz

Cabinet ceiling lamp kit 3 pcs

Materiale

Struttura in alluminio
diffusore in pc

Material

Aluminium structure with
PC diffuser

Colore

Bianco opaco

Colour

Matt white

Sorgente luminosa

LED SMD 3x5W

Light source

LED SMD 3x5W

Driver

Incluso

Driver

Included

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

3x350 Lm

Luminous flux

3x350 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Lifetime and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

105°

Beam angle

105°

CRI

>80

CRI

>80



Accessori inclusi
Included accessories


x3
Driver + morsettiera
con cavo 1500 mm
Driver + connector
with 1500mm cable included




LED-BLITZ-R3
8031440353274

3X5W - 3X350 LM

Misure - Size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF THE PRODUCT



LED-BLITZ-R3*

NEMO



Lampada sottopensile da incasso

Recessed cabinet lamp

Materiale

Struttura in termoplastica

Material

Thermoplastic structure

Colore

Bianco - silver

Colour

white - silver

Sorgente luminosa

LED SMD 3,5W

Light source

LED SMD 3,5W

Driver

Integrato

Driver

Built-in

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

250 Lm

Luminous flux

250 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Lifetime and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80



INC-NEMO-65 BCO
8031414877065




INC-NEMO-65 SIL
8031414877072


Misure - Size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF THE PRODUCT

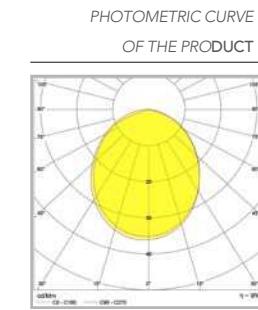

INC-NEMO 3,5W



Misure foro - hole size
dimensioni in mm - size mm

NADIR



Incasso in alluminio

Aluminium recessed light



Materiale

Alluminio pressofuso

Colore

Bianco goffrato

Sorgente luminosa

LED COB 6W

Driver

incluso

Temperatura colore

3200K - 5500K

Punti luce

1

Flusso luminoso

390 Lm, 420 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Angolo di luce

21°

CRI

>80

Material

Die cast aluminium

Colour

Embossed white

Light source

LED COB 6W

Driver

included

Colour temperature

3200K - 5500K

Number of light sources

1

Luminous flux

390 Lm, 420 Lm

Life time and on/off

25.000 h ~ >15.000 on/off

Beam angle

21°

CRI

>80

ZENIT



Incasso orientabile

Adjustable recessed light



Materiale

Policarbonato

Colore

Nikel - bianco satinato - cromo - oro

Sorgente luminosa

LED SMD 5W

Driver

integrated

Temperatura colore

3000K

Punti luce

1

Flusso luminoso

400 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

Material

Polycarbonate

Colour

Nikel - satin white - chrome - gold finish

Light source

LED SMD 5W

Driver

built-in

Colour temperature

3000K

Number of light sources

1

Luminous flux

400 Lm

Life time and on/off

25.000 h ~ >10.000 on/off

Beam angle

120°

CRI

>80

CLASSE A+ CE EMC □

CLASSE A+ CE EMC □

INC-NADIR-R6C
8031439671266 390 LM

INC-NADIR-R6F
8031439641269 420 LM

Foro - cut out
dimensioni in mm - size mm

Misure - Size
dimensioni in mm - size mm

INC-NADIR-Q6C
8031439691264 390 LM


INC-NADIR-Q6F
8031439661267 420 LM

Foro - cut out
dimensioni in mm - size mm

Misure - Size
dimensioni in mm - size mm

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

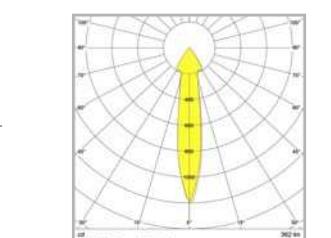

INC-NADIR 6W

INC-ZENIT-5W NIK
8031439901271 5W 400 LM

INC-ZENIT-5W BCO
8031439881276 5W 400 LM

INC-ZENIT-5W CR
8031439891275 5W 400 LM

INC-ZENIT-5W ORO
8031439911270 5W 400 LM

Foro - cut out
dimensioni in mm - size mm


Misure - Size
dimensioni in mm - size mm

Foro - cut out
dimensioni in mm - size mm

Misure - Size
dimensioni in mm - size mm

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

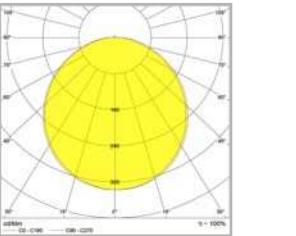

INC-ZENIT 5W

HORUS



Incasso dimmerabile

Dimmable recessed light

Materiale

Policarbonato

Colore

Bianco opaco

Sorgente luminosa

LED SMD 10W -15W - 20W - 25W

Driver

integrato

Temperatura colore

4000K

Dimmer

Dimmer 1-10

Punti luce

1

Flusso luminoso

750 Lm - 1100 Lm - 1800 Lm - 2200 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Angolo di luce

100°

CRI

>80

Material

Polycarbonate

Colour

Matt white

Light source

LED SMD 10W -15W - 20W - 25W

Driver

built-in

Colour temperature

4000K

Dimmer

Dimmable 1-10

Number of light sources

1

Luminous flux

750 Lm - 1100 Lm - 1800 Lm - 2200 Lm

Life time and on/off

25.000 h ~ >15.000 on/off

Beam angle

100°

CRI

>80



HORUS

INC-HORUS-10W
8031440363501

10W


750 LM



Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-HORUS-15W
8031440363518

15W


1100 LM



Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-HORUS-20W
8031440363464

20W


1800 LM



Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-HORUS-25W
8031440363495

25W


PF 0,90 2200 LM



Misure - Size
dimensioni in mm - size mm




Foro - cut out
dimensioni in mm - size mm




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT




INC-HORUS-10W



INC-HORUS-15W



INC-HORUS-20W



INC-HORUS-25W

RAINBOW



Incasso in alluminio

Alluminium recessed light

Materiale

Alluminio

Material

Alluminium

Colore

Cromato o bianco

Colour

Chrome or white

Sorgente luminosa

LED SMD 5W

Light source

LED SMD 5W

Driver

DC 12V tensione costante
non incluso

Driver

DC 12V costant voltage
not included

Temperatura colore

RGB + 4000K
 +

Colour temperature

RGB + 4000K
 +

Punti luce

1

Number of light sources

1

Durata e on/off

25.000 h ~ >15.000 on/off

Life time and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80

MATRIX



Kit 3 pz. incasso in metallo con lampadina GU10 inclusa

Kit 3 pcs metal down lights with GU10 bulb included

Materiale

Metallo

Material

Metal

Colore

Bianco opaco - nikel

Colour

Matt white - nikel

Specifiche portalampada

GU10 230V~50Hz

Lampholder specification

GU10 230V~50Hz

Lampadine installate

3pz x GU10 6W LED

Installed bulbs

3pcs x GU10 6W LED

CLASSE A+ CE

INC-MATRIX-LEDF3 NIK
8031440359337


3XGU10 6W LED

INC-MATRIX-LEDF3 BCO
8031440359320


3XGU10 6W LED




Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm

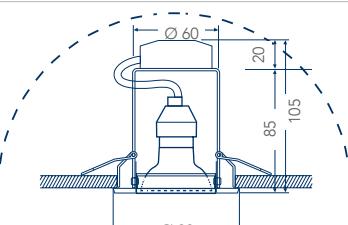


ACCESSORI INCLUSI



3 lampadine LED
SMD installata
3 LED SMD light
bulbs installed

Classe	Dimmer	Watt	CRI	Lumen	Angolo	Kelvin	On/off	Durata
A+		6W	80	400	100°	3000	>10.000	15000h

FOTOMETRIA DELLA LAMPADINA GU10
INSTALLATA
PHOTOMETRIC CURVE OF THE BUILT-IN
GU10 BULBS

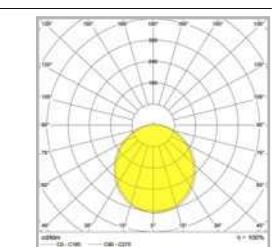

STAFFA CON CONNETTORE
BRACKET WITH CONNECTOR INCLUDED



3 Pz inclusi
3 pcs included

PORTALAMPADA
LAMPHOLDER INCLUDED



3 Pz inclusi
3 pcs included

MATRIX



Kit 3 pz. incasso in metallo con lampadina GU10 inclusa

Materiale

Metallo

Colore

Bianco - nikel - oro - cromo

Specifiche portalamppada

GU10 230V~50Hz

Lampadine installate

3pz x GU10 6W LED

Kit 3 pcs metal down lights with GU10 bulb included

Material

Metal

Colour

White - nikel - gold - chrome


Lampholder specification

GU10 230V~50Hz

Installed bulbs

3pcs x GU10 6W LED

MATRIX

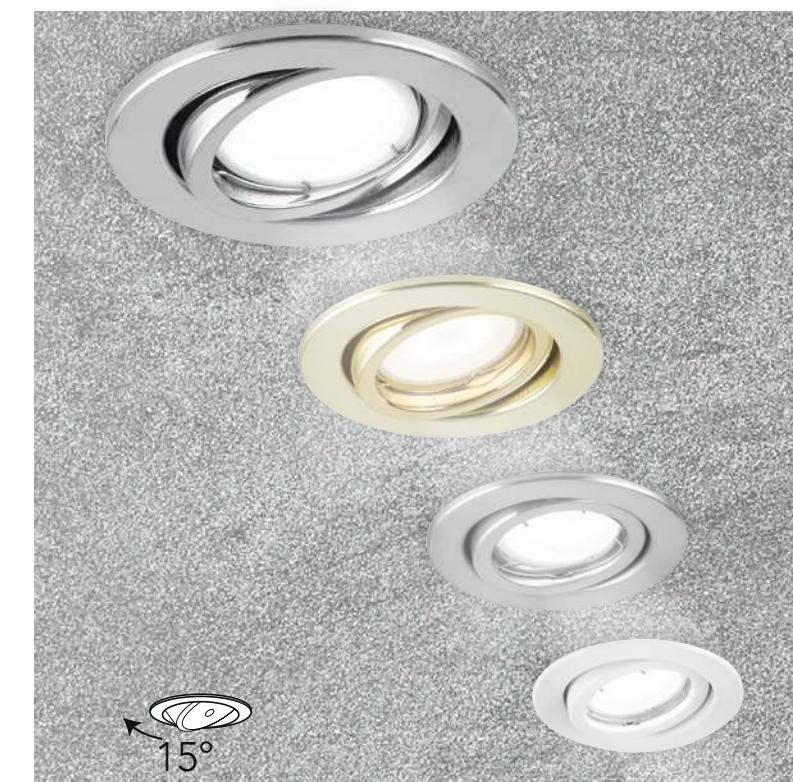

incasso in metallo con lampadina GU10 inclusa

Materiale

Metallo

Colore

Bianco - nikel - oro - cromo

Specifiche portalamppada

GU10 230V~50Hz

Lampadine installate

GU10 6W LED

metal down lights with GU10 bulb included

Material

Metal

Colour

White - nikel - gold - chrome

Lampholder specification

GU10 230V~50Hz

Installed bulbs

GU10 6W LED

INC-MATRIX-LEDM3 NIK
8031431571182

3XGU10 6W LED

INC-MATRIX-LEDM3 BCO
8031429651162

3XGU10 6W LED


INC-MATRIX-LEDM3 CR
8031440313032

3XGU10 6W LED


INC-MATRIX-LEDM3 ORO
8031440313025

3XGU10 6W LED


Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm

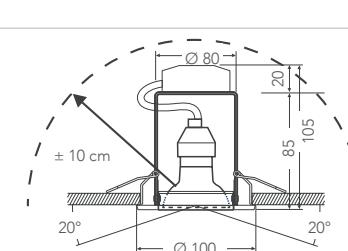

ACCESSORI INCLUSI




3 lampadine LED
SMD installata
3 LED SMD light
bulbs installed

Classe	Dimmer	Watt	CRI	Lumen	Angolo	Kelvin	On/off	Durata	FOTOMETRIA DELLA LAMPADINA GU10 INSTALLATA
A+		6W	80	400	100°	3000	>10.000	15000h	PHOTOMETRIC CURVE OF BUILT-IN GU10 BULBS

STAFFA CON CONNETTORE
BRACKET WITH CONNECTOR INCLUDED



3 Pz inclusi
3 pcs included

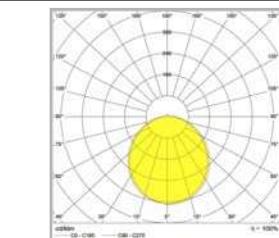

PORTALAMPADA
LAMPHOLDER INCLUDED



3 Pz inclusi
3 pcs included

INC-MATRIX-LEDM1 NIK
8031440313049

1XGU10 6W LED

INC-MATRIX-LEDM1 BCO
8031440313063

1XGU10 6W LED


INC-MATRIX-LEDM1 CR
8031440313056

1XGU10 6W LED


INC-MATRIX-LEDM1 ORO
8031440313070

1XGU10 6W LED


Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm

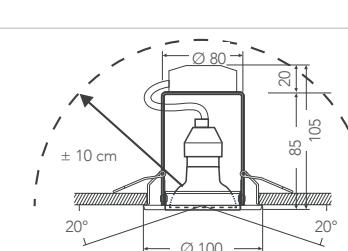

ACCESSORI INCLUSI



lampadina LED
SMD installata
LED SMD light
bulbs installed

Classe	Dimmer	Watt	CRI	Lumen	Angolo	Kelvin	On/off	Durata	FOTOMETRIA DELLA LAMPADINA GU10 INSTALLATA
A+		6W	80	400	100°	3000	>10.000	15000h	PHOTOMETRIC CURVE OF BUILT-IN GU10 BULBS

STAFFA CON CONNETTORE
BRACKET WITH CONNECTOR INCLUDED




1 Pz inclusi
1 pcs included

PORTALAMPADA
LAMPHOLDER INCLUDED



1 Pz inclusi
1 pcs included




AYRIS

Strutture incasso antiriflesso in alluminio nero o bianco goffrato
Antiglare aluminium down light frame embossed black or white



Attacco sorgente
Light source

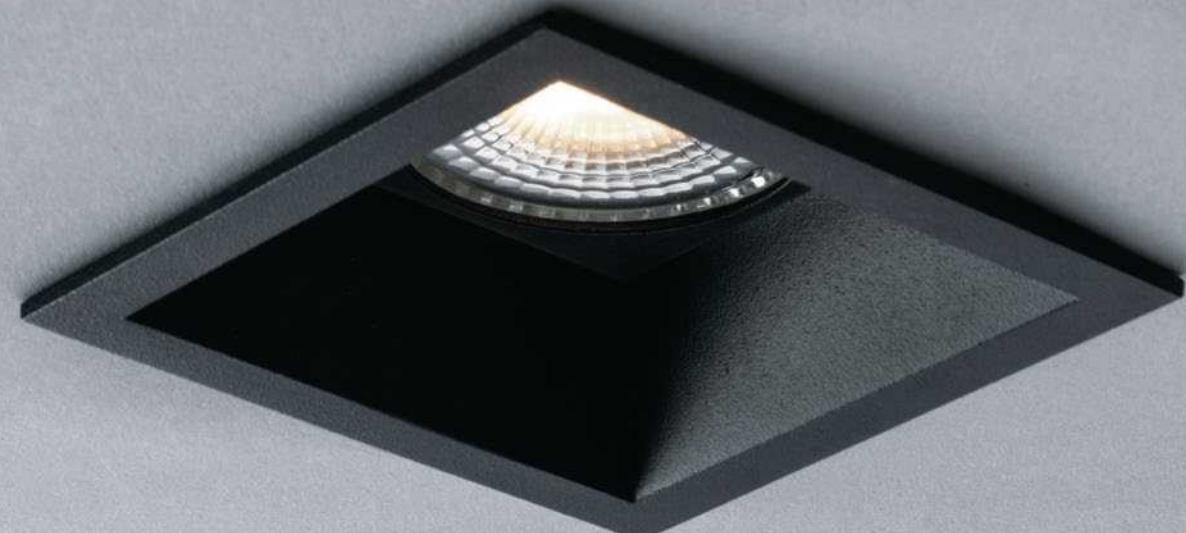

AYRIS

Strutture incasso antiriflesso in alluminio nero o bianco goffrato
Antiglare aluminium down light frame embossed black or white



Attacco sorgente
Light source



	INC-AYRIS-Q BCO 8031414868223	1XGU10 MAX 35W
Portalampada incluso Lampholder included	Lampadina non inclusa Light bulb not included	
Misure - Size dimensioni in mm - size mm	Foro - cut out dimensioni in mm - size mm	



	INC-AYRIS-Q NER 8031414868186	1XGU10 MAX 35W
Portalampada incluso Lampholder included	Lampadina non inclusa Light bulb not included	
Misure - Size dimensioni in mm - size mm	Foro - cut out dimensioni in mm - size mm	



	INC-AYRIS-R BCO 8031414868216	1XGU10 MAX 35W
Portalampada incluso Lampholder included	Lampadina non inclusa Light bulb not included	
Misure - Size dimensioni in mm - size mm	Foro - cut out dimensioni in mm - size mm	




	INC-AYRIS-R NER 8031414868193	1XGU10 MAX 35W
Portalampada incluso Lampholder included	Lampadina non inclusa Light bulb not included	
Misure - Size dimensioni in mm - size mm	Foro - cut out dimensioni in mm - size mm	





Verniciabile
PaintableAttacco sorgente
Light source

PHANTOM

Incasso in gesso verniciabile.
Gypsum down light paintable.INC-PHANTOM-R1
8031431551184



1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - Size
dimensioni in mm - size mmForo - cut out
dimensioni in mm -
size mm

Ø 83

INC-PHANTOM-Q1
8031431561183

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - Size
dimensioni in mm - size mmForo - cut out
dimensioni in mm -
size mm



73x73



SPETTRO

Incassi in gesso verniciabili.
Gypsum down light paintable.Verniciabile
PaintableAttacco sorgente
Light sourceINC-SPETTRO-R1
8031431531186



1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - Size
dimensioni in mm - size mmForo - cut out
dimensioni in mm -
size mm

Ø 85

INC-SPETTRO-Q1
8031431541185

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - Size
dimensioni in mm - size mmForo - cut out
dimensioni in mm -
size mm

95x95



MINI



Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante
Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable



GU10

Attacco sorgente
Light source



Misura lampadina
Bulb size



SPIRIT



Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante
Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable



GU10

Attacco sorgente
Light source



	INC-MINI-R1 8031414873623	1XMINI GU10 MAX 35W
Portalampada incluso Lampholder included		Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm		Foro - cut out dimensioni in mm - size mm



	INC-MINI-Q1 8031414873616	1XMINI GU10 MAX 35W
Portalampada incluso Lampholder included		Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm		Foro - cut out dimensioni in mm - size mm



	INC-SPIRIT-R1 8031440362177	1XGU10 MAX 35W
Portalampada incluso Lampholder included		Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm		Foro - cut out dimensioni in mm - size mm



	INC-SPIRIT-Q1 8031440362160	1XGU10 MAX 35W
Portalampada incluso Lampholder included		Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm		Foro - cut out dimensioni in mm - size mm



GHOST





Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante
Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable



GU10
Attacco sorgente
Light source

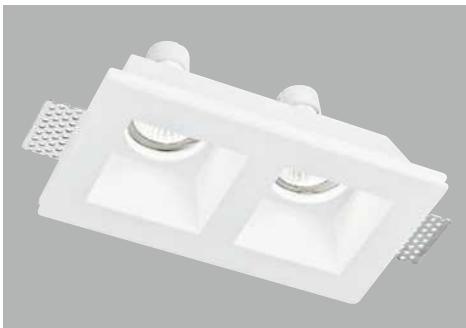

	INC-GHOST-Q2 8031434301212	2XGU10 MAX 35W	Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm			
		Foro - cut out dimensioni in mm - size mm	



	INC-GHOST-Q1 8031434261219	1XGU10 MAX 35W	Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm			
		Foro - cut out dimensioni in mm - size mm	



	INC-GHOST-Q1D 8031434241211	1XGU10 MAX 35W	Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm			
		Foro - cut out dimensioni in mm - size mm	



SNOW



Faretto da incasso in gesso con diffusore in vetro satinato da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante
Recessed gypsum downlight with satin glass diffuser to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable



GU10
Attacco sorgente
Light source



	INC-SNOW-R 8031440351607	1XGU10 MAX 10W	Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm			
		Foro - cut out dimensioni in mm - size mm	



	INC-SNOW-Q 8031440351577	1XGU10 MAX 10W	Lampadina non inclusa Light bulb not included
Misure - Size dimensioni in mm - size mm			
		Foro - cut out dimensioni in mm - size mm	





MORGANA

Verniciabile
PaintableGU10
Attacco sorgente
Light sourceOrientabile
Adjustable

Faretto da incasso orientabile in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Adjustable recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body

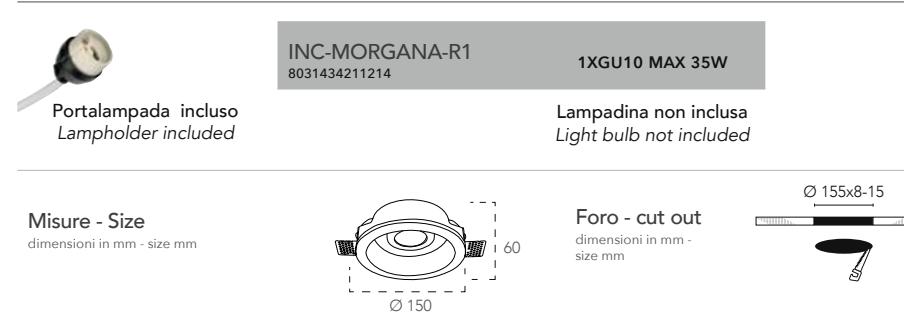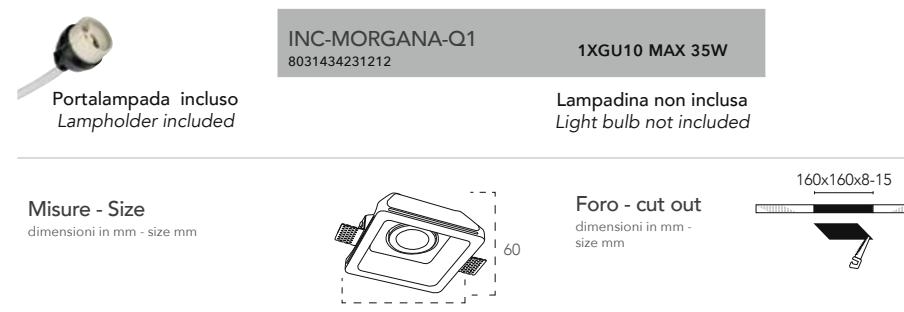


SENSO

Verniciabile
PaintableGU10
Attacco sorgente
Light sourceOrientabile
Adjustable

Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body

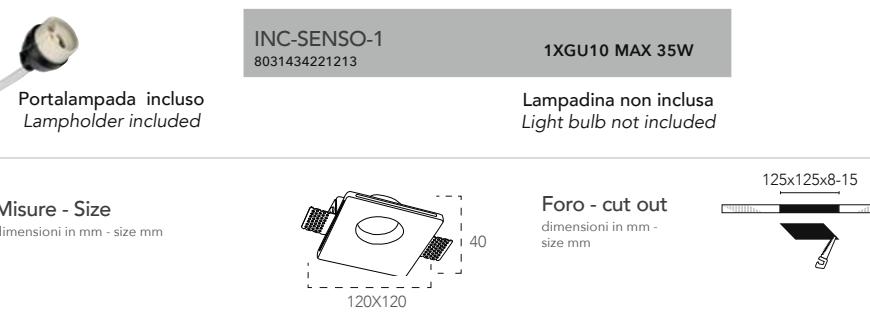

BRICK



Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante
Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body




Verniciabile
Paintable



GU10

Attacco sorgente
Light source




Portalampada incluso
Lampholder included

INC-BRICK-Q1
8031414873586


1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm -
size mm

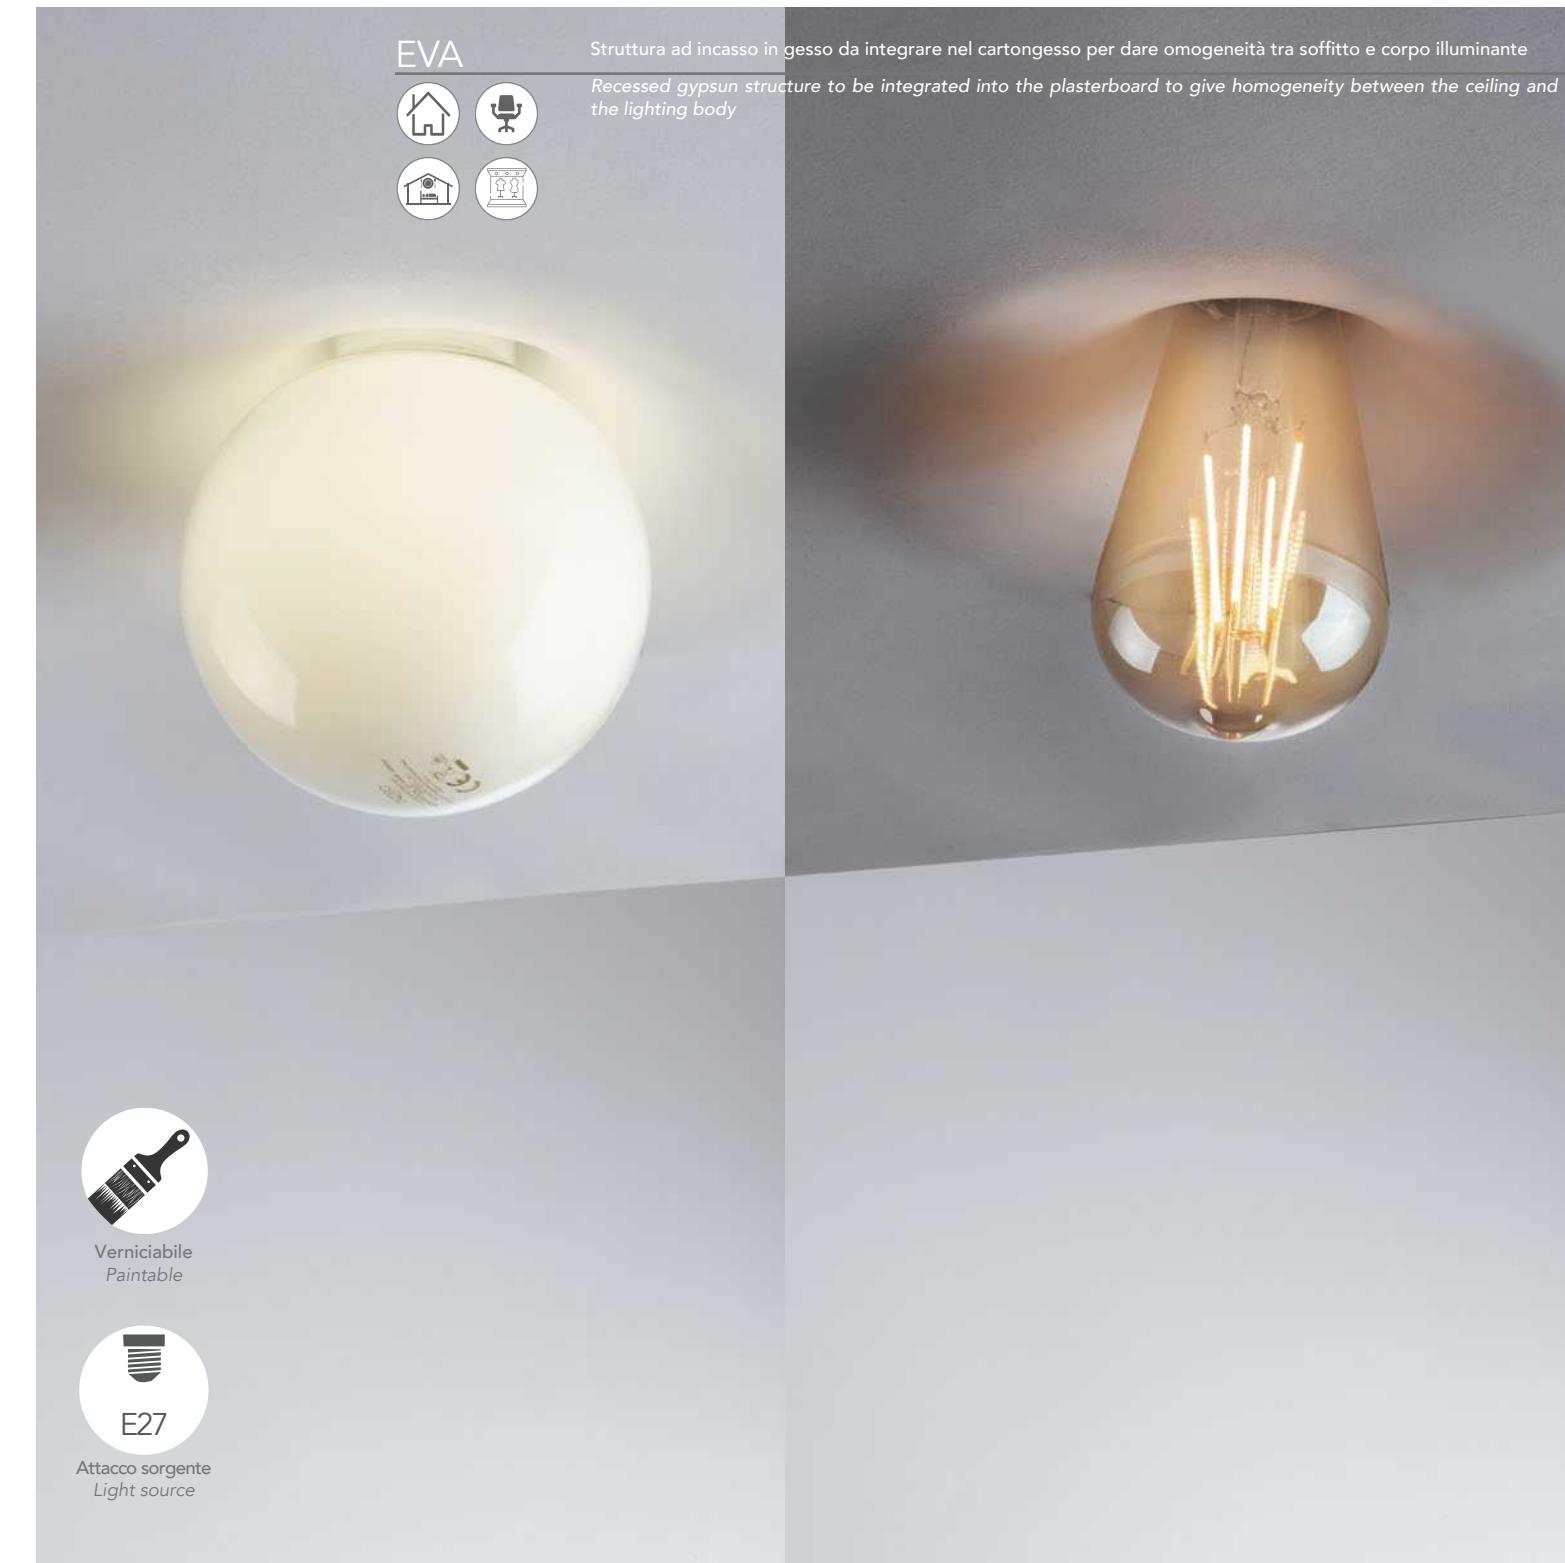

EVA



Struttura ad incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante
Recessed gypsum structure to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable




E27
Attacco sorgente
Light source

INC-EVA-R1
8031414873609


1XE27 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm -
size mm



ARIEL

Segnapasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante

Gypsum wall-light to be integrated into the plasterboard to give homogeneity between the wall and the lighting body





Verniciabile
Paintable



Attacco sorgente
Light source



Misura lampadina
Bulb size

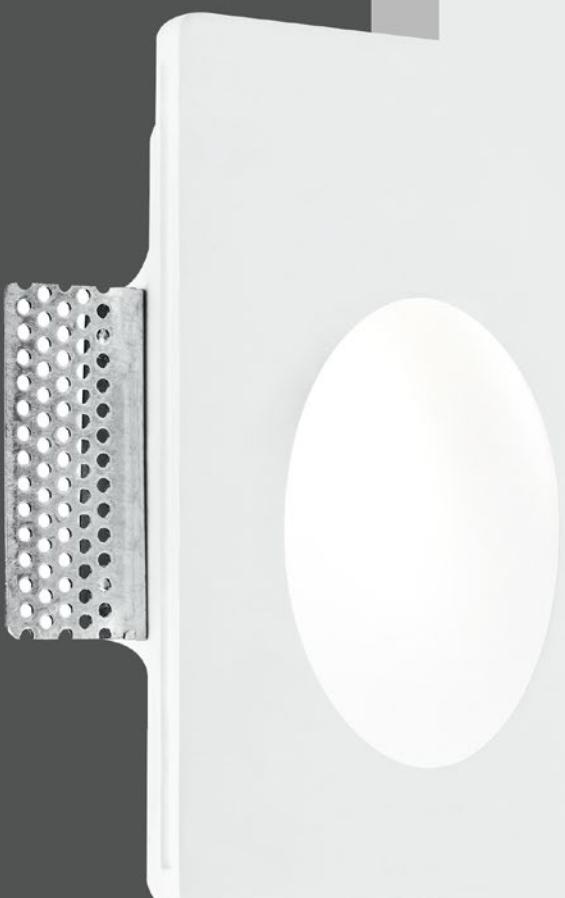

staffa regolabile
adjustable bracket



Portalampara incluso
Lampholder included


I-ARIEL-QL1
8031434151213

1XGU10 MINI MAX 35W

Lampadina non inclusa
Light bulb not included


Misure - size

dimensioni in mm - size mm



Foro - cut out



dimensioni in mm -
size mm



Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installation



I-ARIEL-QL1-BOX
8031414868360

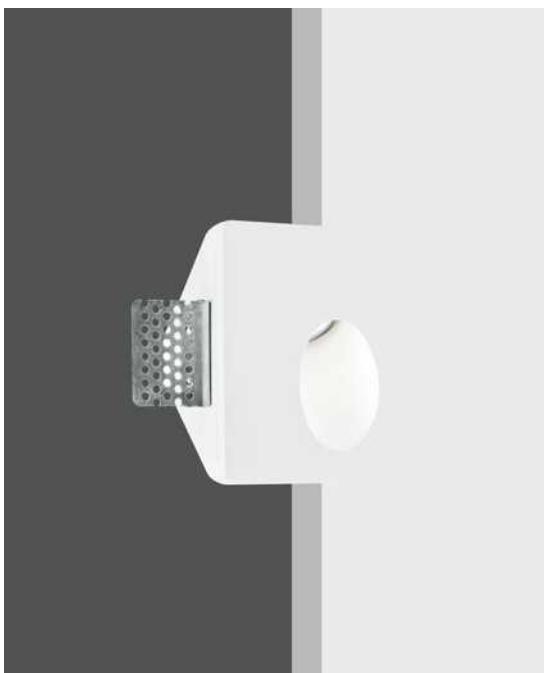

Portalampara incluso
Lampholder included


I-ARIEL-RS1
8031434131215

1XGU10 MINI MAX 35W


Lampadina non inclusa
Light bulb not included

Misure - size

dimensioni in mm - size mm





Foro - cut out
dimensioni in mm -
size mm



Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installation



I-ARIEL-RS1-BOX
8031414868377

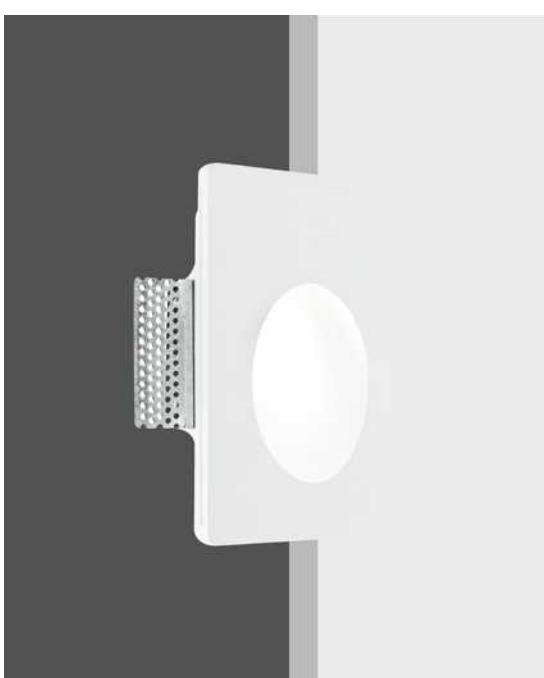

Portalampara incluso
Lampholder included


I-ARIEL-RM1
8031434121216

1XGU10 MINI MAX 35W


Lampadina non inclusa
Light bulb not included

Misure - size

dimensioni in mm - size mm




Foro - cut out
dimensioni in mm -
size mm




Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installation



I-ARIEL-RM1-BOX
8031414868384



ANIMA



Verniciabile
PaintableE14
Attacco sorgente
Light sourcestaffa regolabile
adjustable bracket

Applique in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante


Gypsum wall-light to be integrated into the plasterboard to give homogeneity between the wall and the luminaire body

I-ANIMA-AP2
8031414861323

2XE14 MAX 14W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmForo - cut out
dimensioni in mm -
size mmCassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installationI-ANIMA-AP2-BOX
8031414868391

CE

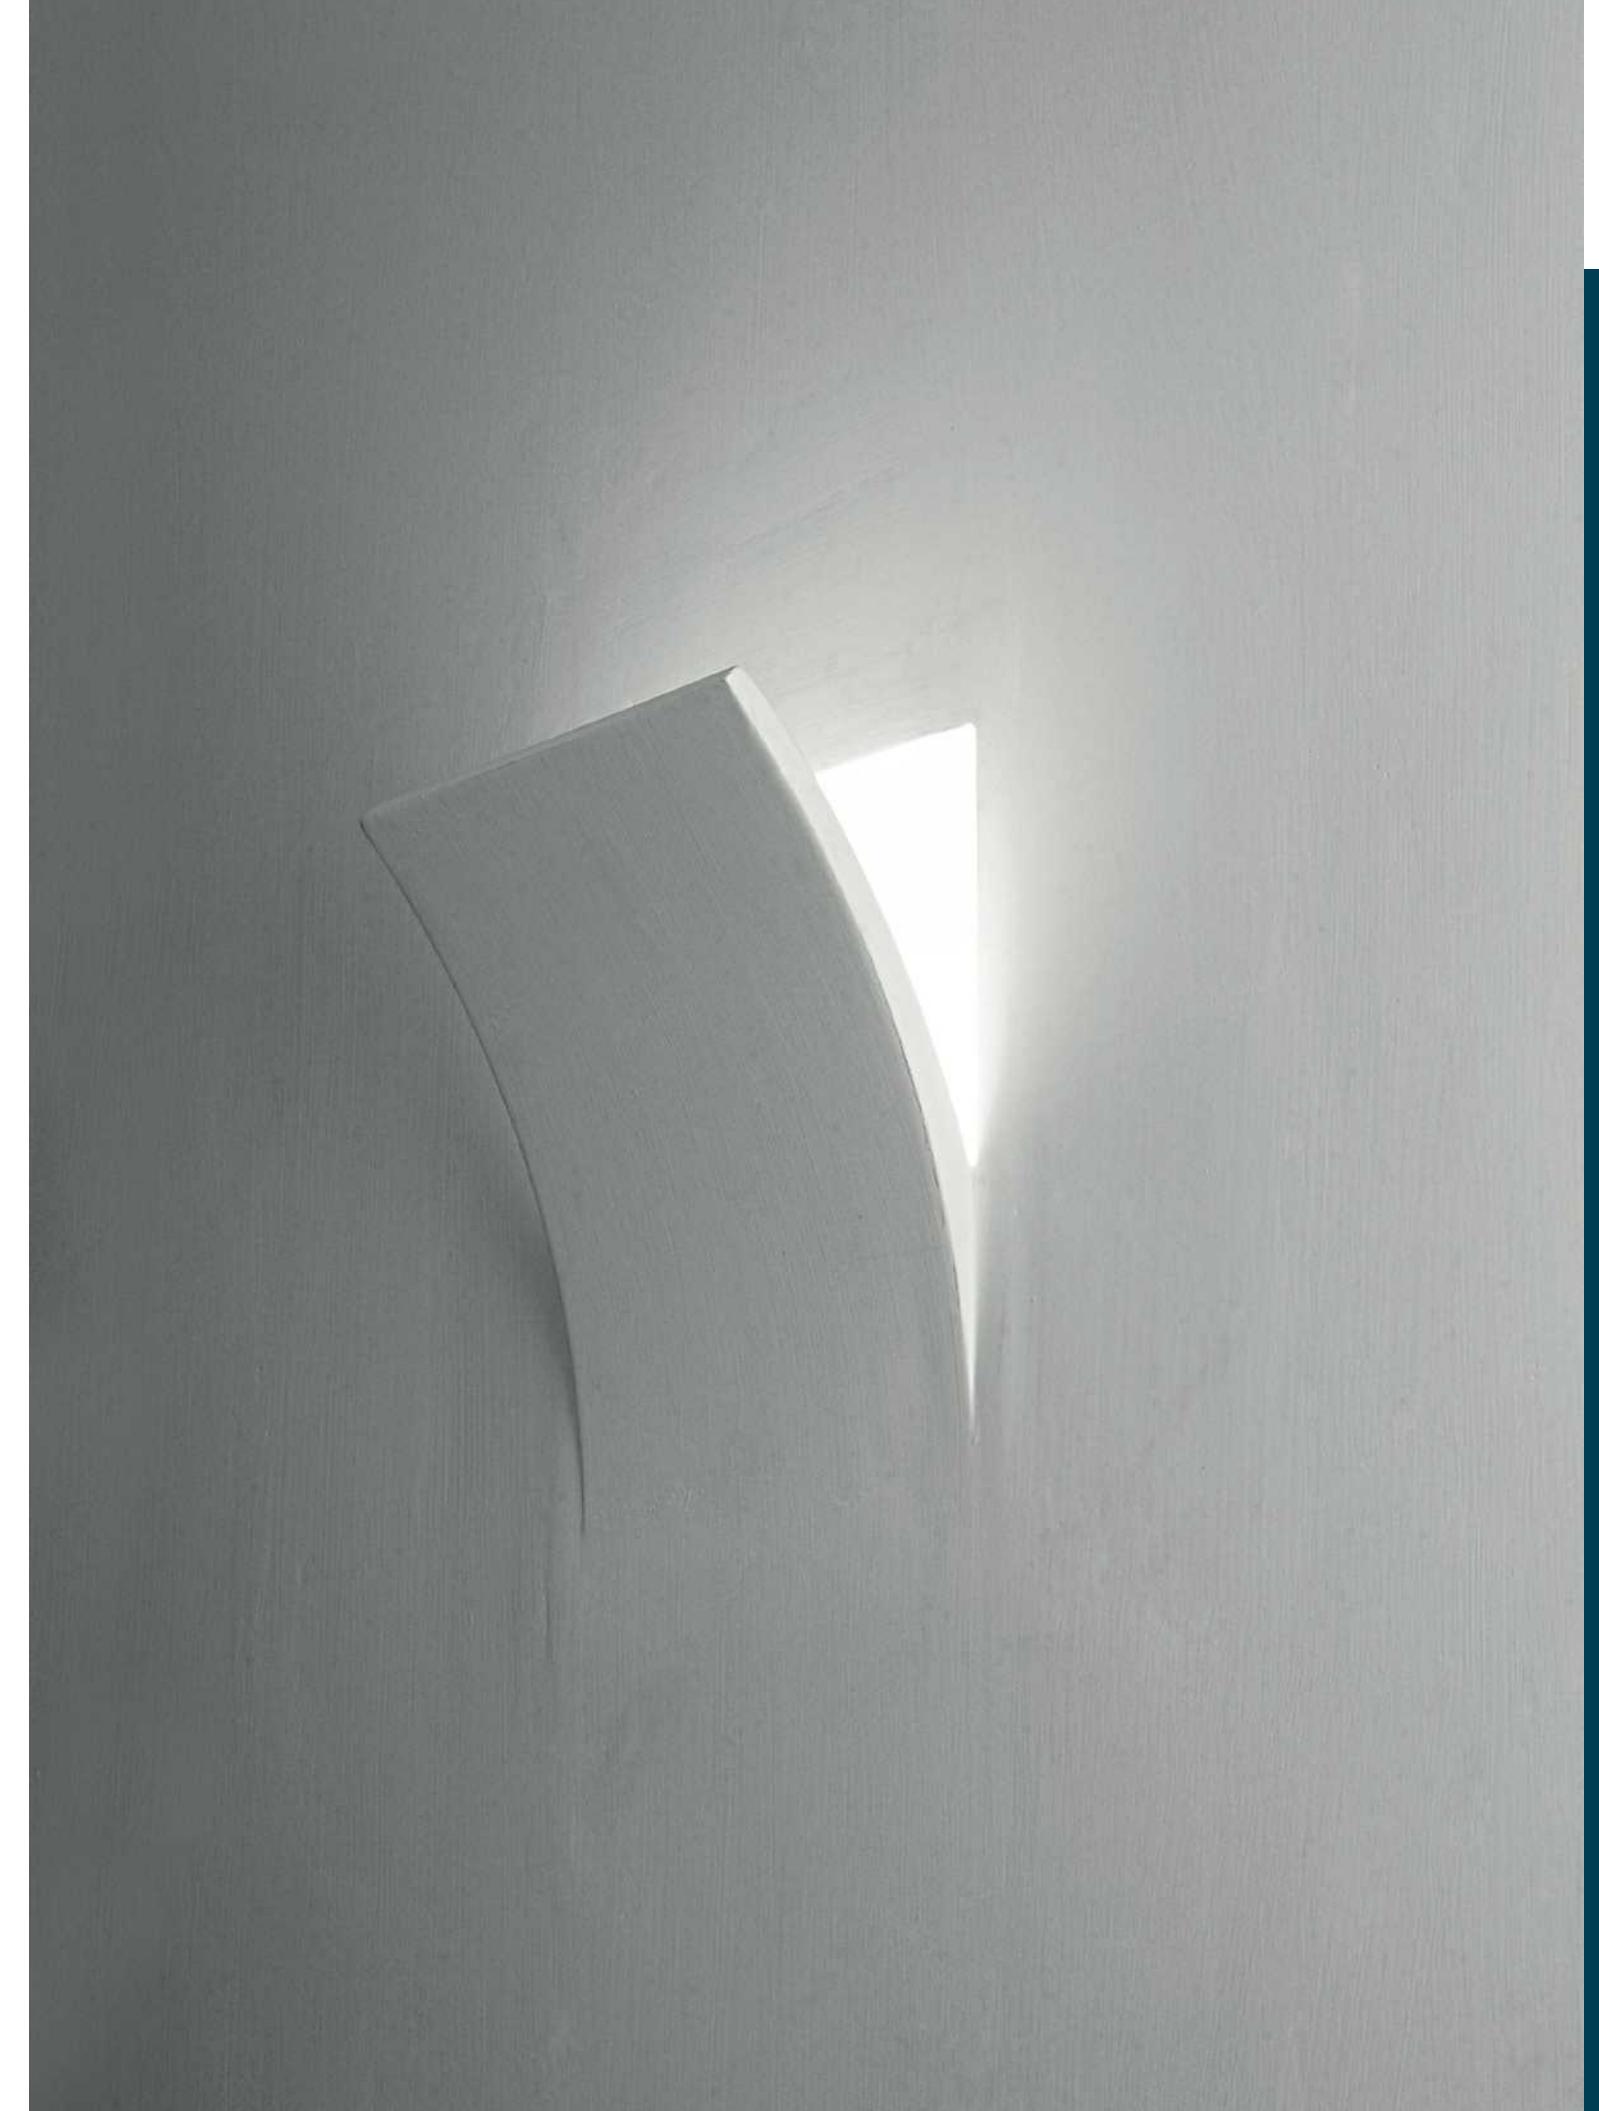

VIPER

Strutture incasso IP65 in acciaio e diffusore in vetro satinato

Steel down light frame with satin glass diffuser IP65



Lampadina non inclusa
Light bulb not included



Portalamppada GU10 o MR16 non inclusi
GU10 or MR16 Lampholder not included



INC-VIPER-R-NIK
8031414861576

Portalamppada non incluso
Lampholder not included

INC-VIPER-R-BCO
8031414861590


Portalamppada non incluso
Lampholder not included

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm -
size mm



Foro - cut out
dimensioni in mm -
size mm



INC-VIPER-Q-NIK
8031414861873

Portalamppada non incluso
Lampholder not included

INC-VIPER-Q-BCO
8031414861866


Portalamppada non incluso
Lampholder not included

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm -
size mm



Foro - cut out
dimensioni in mm -
size mm



ALAN

Incasso in metallo con gemme in acrilico



Portalamppada GU10 o
MR16 non inclusi
GU10 or MR16
Lampholder not in-
cluded



INC-ALAN-CR
8031440311915


15°
Portalampada non incluso
Lampholder not included

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm -
size mm



Foro - cut out
dimensioni in mm -
size mm



GEMMA

Incasso in metallo con gemme in acrilico



Incasso in metallo con gemme in acrilico

Metal down light with acrylic beads



INC-GEMMA-CR
8031439951276


1XMR16 MAX 35W

Lampadina non inclusa
Light bulb not included



Portalamppada incluso
Lampholder included

Misure - size
dimensioni in mm -
size mm




Foro - cut out
dimensioni in mm -
size mm




STENOS


Incasso in termoplastica orientabile quadrato diffusione asimmetrica antiriflesso
Thermoplastic recessed light square frame with asymmetric anti glare light diffuser

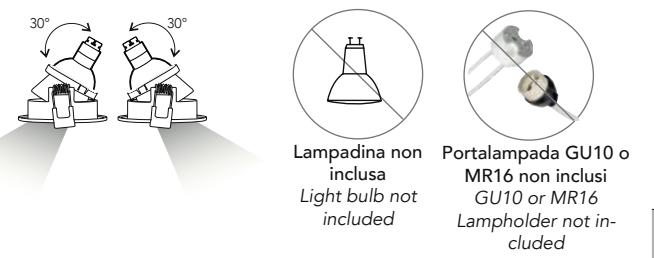

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-STENOS-Q-OV
8031414875856

Portalampada non incluso
Lampholder not included



INC-STENOS-Q-QU
8031414875870

Portalampada non incluso
Lampholder not included



INC-STENOS-Q-RO
8031414875849

Portalampada non incluso
Lampholder not included




INC-STENOS-Q-ML
8031414875863

Portalampada non incluso
Lampholder not included

STENOS


Incasso in termoplastica orientabile quadrato diffusione asimmetrica antiriflesso
Thermoplastic recessed light square frame with asymmetric anti glare light diffuser

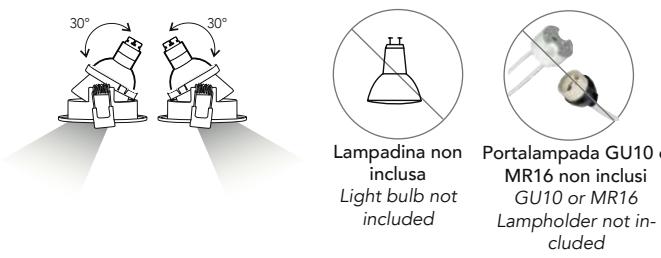

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-STENOS-R-OV
8031414875818

Portalampada non incluso
Lampholder not included



INC-STENOS-R-QU
8031414875832

Portalampada non incluso
Lampholder not included



INC-STENOS-R-RO
8031414875801

Portalampada non incluso
Lampholder not included



INC-STENOS-R-ML
8031414875825

Portalampada non incluso
Lampholder not included

REFLEX

Incasso in metallo

Metal down light



- Lampadina non inclusa
Light bulb not included
- Portalampada GU10 o MR16 non inclusi
GU10 or MR16 Lampholder not included



INC-REFLEX-SF1 BCO
8031439321260

Portalampada non incluso
Lampholder not included




INC-REFLEX-SF1 NIK
8031439311261

Portalampada non incluso
Lampholder not included


Misure - size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



INC-REFLEX-SF1 BR
8031439331269

Portalampada non incluso
Lampholder not included



INC-REFLEX-SF1 CR
8031439301262

Portalampada non incluso
Lampholder not included



INC-REFLEX-SF1 ORO
8031439341268

Portalampada non incluso
Lampholder not included




INC-REFLEX-SF1 NER
8031414861552

Portalampada non incluso
Lampholder not included


Misure - size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



INC-REFLEX-Q-SF1 NIK
8031414861545

Portalampada non incluso
Lampholder not included



INC-REFLEX-Q-SF1 BCO
8031414861538

Portalampada non incluso
Lampholder not included

REFLEX

Incasso in metallo orientabile

Metal down light adjustable



- Lampadina non inclusa
Light bulb not included
- Portalampada GU10 o MR16 non inclusi
GU10 or MR16 Lampholder not included
- Orientabile 15°
Adjustable 15°



INC-REFLEX-SM1 BCO
8031439251260

Portalampada non incluso
Lampholder not included




INC-REFLEX-SM1 NIK
8031439261269

Portalampada non incluso
Lampholder not included

Misure - size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



INC-REFLEX-SM1 BR
8031439291266

Portalampada non incluso
Lampholder not included



INC-REFLEX-SM1 CR
8031439281267

Portalampada non incluso
Lampholder not included



INC-REFLEX-SM1 ORO
8031439271268

Portalampada non incluso
Lampholder not included




INC-REFLEX-SM1 NER
8031414861569

Portalampada non incluso
Lampholder not included

Misure - size

dimensioni in mm - size mm



Foro - cut out

dimensioni in mm - size mm



INC-REFLEX-Q-SM1 NIK
8031440363280

Portalampada non incluso
Lampholder not included



INC-REFLEX-Q-SM1 BCO
8031440363310

Portalampada non incluso
Lampholder not included

METRO

Sistema cavi tesi finitura cromo.
Wire system chrome finish.



Lampadina non
inclusa
Light bulb not
included



Attacco sorgente
Light source



Orientabile
Adjustable




LED-METRO-5
8031414862139

5XMR16 MAX 9W

DRIVER 50W INCLUSO

Lampadina non inclusa
Light bulb not included


Misure - size
dimensioni in mm - size mm

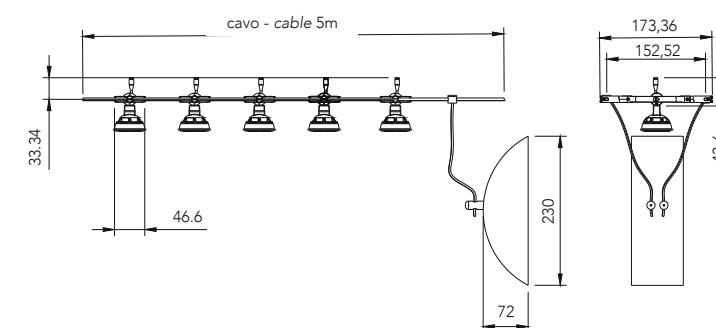

Accessorio non incluso - accessory not included

I-WIRE-10M
8031414870387

Cavo 10 metri
10 meters wire



EUCLID

Sistema cavi tesi finitura nikel.
Wire system nikel finish.



Lampadina non
inclusa
Light bulb not
included



Attacco sorgente
Light source



Orientabile
Adjustable




LED-EUCLID-5
8031414862146

5XMR16 MAX 9W

DRIVER 50W INCLUSO

Lampadina non inclusa
Light bulb not included


Misure - size
dimensioni in mm - size mm

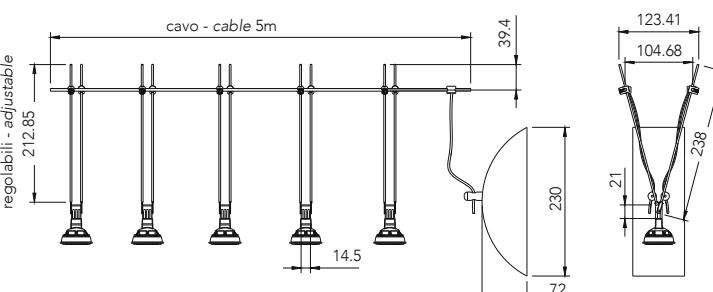

Accessorio non incluso - accessory not included

I-WIRE-10M
8031414870387

Cavo 10 metri
10 meters wire



BUILD

Barra plafoniera o sospensione

LED bar pendant or surface mount ceiling

Materiale

Alluminio

Material

Aluminium

Colore

Bianco goffrato - nero goffrato

Colour

Embossed white - embossed black

Sorgente luminosa

LED SMD 26W - 52W

Light source

LED SMD 26W - 52W

Driver

integrato

Driver

built-in

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Flusso luminoso

2526 Lm - 5052 Lm

Luminous Flux

2526 Lm - 5052 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Lifetime and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

100°

Beam angle

100°

CRI
>90 CRI
>90 

CLASSE A CE EMC □

LED-BUILD-B-1M
8031414867899

● ■ 26W PF 0,90 2526 LM

LED-BUILD-W-1M
8031414867912


● ■ 26W PF 0,90 2526 LM

LED-BUILD-B-2M
8031414867936


● ■ 52W PF 0,90 5052 LM

LED-BUILD-W-2M
8031414867950

● ■ 52W PF 0,90 5052 LM

FOTOMETRIA DEL
PRODOTTOPHOTOMETRIC CURVE
OF THE PRODUCT

LED-BUILD 1M*

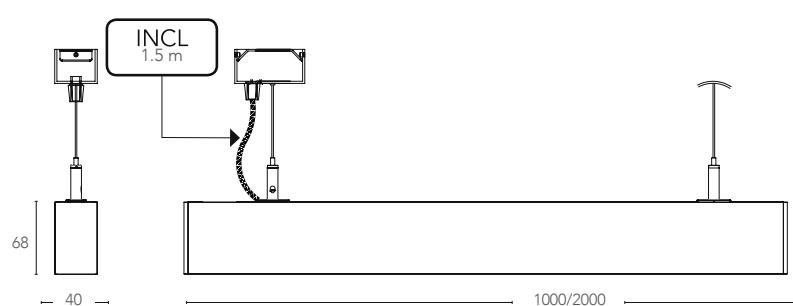Misure - size
dimensioni in mm - size mmKIT CAVI E FISSAGGIO A PLAFONIERA INCLUSI.
METAL BRACKET AND STEEL HANGING WIRE INCLUDED.

* Le curve fotometriche sopra indicate rappresentano il singolo metro
* Above photometric curve represent the single meter

BUILD

PANEL



Pannello LED luce diretta per fissaggio
ad incasso in cartongesso oppure a sospensione

Backlight LED panel for recess
or suspension mount

Materiale

Alluminio, diffusore in acrilico

Material

Aluminium, acrylic diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 40W

Light source

LED SMD 40W

Driver

Incluso

Driver

Included

Temperatura colore

4000K - 6000K

Colour temperature

4000K - 6000K

Punti luce

1

Number of light sources

1

Flusso luminoso

4000 Lm

Luminous Flux

4000 Lm

Durata e on/off

20.000h ~ >10.000 on/off

Lifetime and on/off

20.000h ~ >10.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80



LED-PANEL-60X60BK
8031414874323

LED-PANEL-F-60X60BK
8031414874347

Misure - size
dimensioni in mm - size mm

40W PF 0,90

40W PF 0,90


590x590

30

595

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF THE PRODUCT



LED-PANEL-60X60 BK

LED-PANEL-30X120BK
8031414874316

LED-PANEL-F-30X120BK
8031414874330

Misure - size
dimensioni in mm - size mm

40W PF 0,90

40W PF 0,90

295

30

290x1190

1195

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF THE PRODUCT



LED-PANEL-30X120 BK

PANEL



Pannello LED

LED panel

Materiale

Alluminio, diffusore in PMMA

Material

Aluminium, PMMA diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 40W

Light source

LED SMD 40W

Driver

Incluso

Driver

Included

Temperatura colore

4000K - 6500K

Colour temperature

4000K - 6500K

Punti luce

1

Number of light sources

1

Flusso luminoso

4000Lm

Luminous Flux

4000Lm

Durata e on/off

50.000h - >25.000 on/off

Lifetime and on/off

50.000h - >25.000 on/off

Angolo di luce

110°

Beam angle

110°

CRI

>80

CRI

>80



LED-PANEL-60X60-5Y
8031414875344

LED-PANEL-F-60X60-5Y
8031414875368

Misure - size
dimensioni in mm - size mm

40W PF 0,90

40W PF 0,90


590x590

8,8

595

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF THE PRODUCT

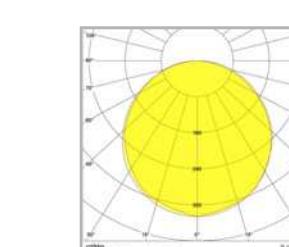

LED-PANEL-60X60 BK

LED-PANEL-30X120-5Y
8031414871773

LED-PANEL-F-30X120-5Y
8031414874354

Misure - size
dimensioni in mm - size mm

40W PF 0,90

40W PF 0,90

295

30

290x1190

1195

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF THE PRODUCT



LED-PANEL-30X120 BK

PANEL



Pannello LED

Materiale

Alluminio, diffusore in acrilico

Colore

Bianco

Sorgente luminosa

LED SMD 40W

Driver

Incluso

Temperatura colore

3000K - 4000K - 6000K



Punti luce

1

Flusso luminoso

● 3200 Lm - ● 4000 Lm - 4800 Lm

Durata e on/off

20.000h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

LED panel

Material

Aluminium, acrylic diffuser

Colour

White

Light source

LED SMD 40W

Driver

Included

Colour temperature

3000K - 4000K - 6000K



Number of light sources

1

Luminous Flux

● 3200 Lm - ● 4000 Lm - 4800 Lm

Lifetime and on/off

20.000h ~ >10.000 on/off

Beam angle

120°

CRI

>80


PANEL



LED-PANEL-60X60 8031440352444	● 40W	4000 Lm	PF 0,90
----------------------------------	-------	---------	---------


LED-PANEL-C-60X60 8031440354868	● 40W	3200 Lm	PF 0,90
------------------------------------	-------	---------	---------

LED-PANEL-F-60X60 8031440354929	● 40W	4000 Lm	PF 0,90
------------------------------------	-------	---------	---------

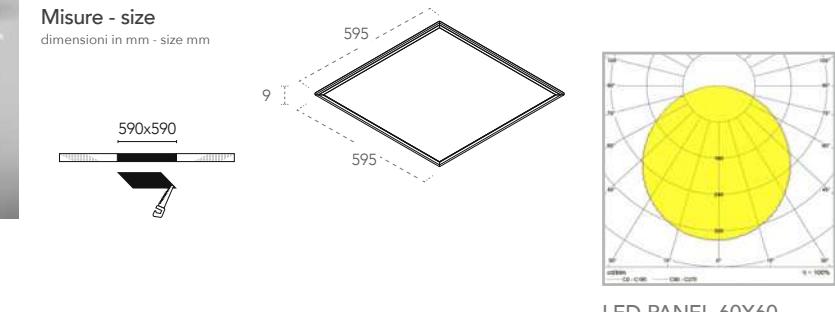



LED-PANEL-30X120 8031440352468	● 40W	4000 Lm	PF 0,90
-----------------------------------	-------	---------	---------

LED-PANEL-F-30X120 8031440354912	● 40W	4000 Lm	PF 0,90
-------------------------------------	-------	---------	---------

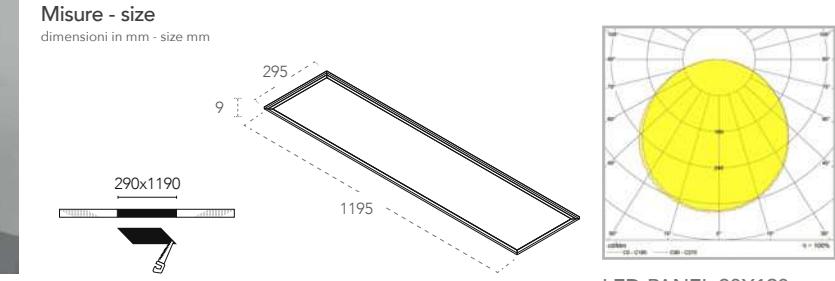

LED-PANEL-60X120 8031440361897	● 60W	4800 Lm	PF 0,90
-----------------------------------	-------	---------	---------

LED-PANEL-F-60X120 8031440361873	● 60W	4800 Lm	PF 0,90
-------------------------------------	-------	---------	---------

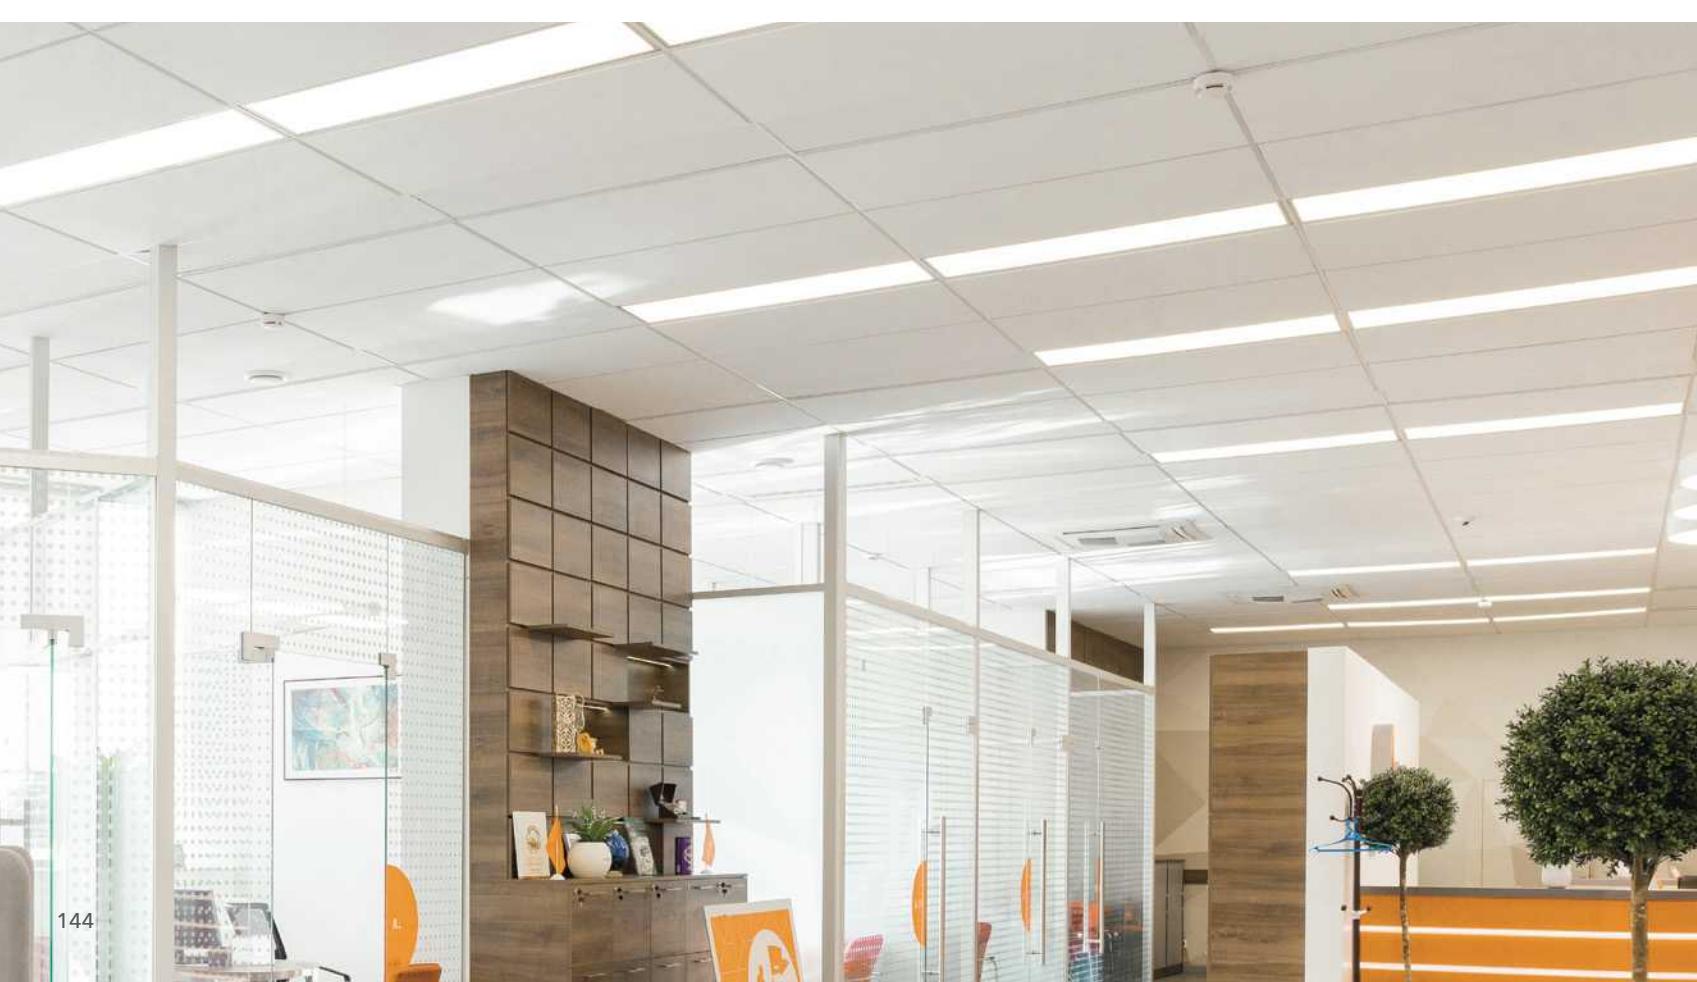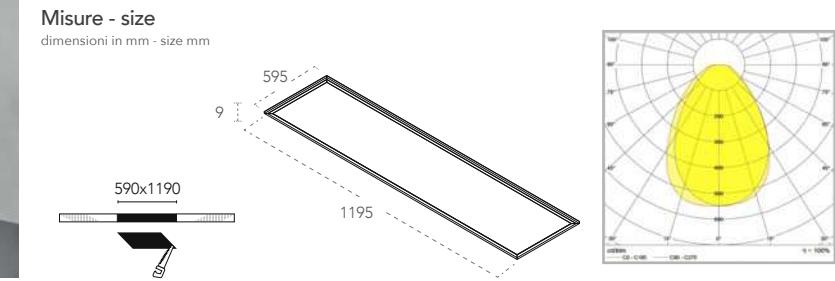

PANEL UGR



Pannello LED UGR<19

Materiale
Alluminio, diffusore in PMMA

Colore
Finitura bianco

Sorgente luminosa
LED SMD 40W

Driver

Incluso

Temperatura colore
4000K

Punti luce

1

UGR

<19

Flusso luminoso
3600 Lm - 3200 Lm

Durata e on/off
20.000h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

LED panel UGR<19

Material
Aluminium, PMMA diffuser

Colour
White

Light source
LED SMD 40W

Driver

Included

Colour temperature
4000K

Number of light sources

1

UGR

<19

Luminous Flux
3600 Lm

Lifetime and on/off
20.000h ~ >10.000 on/off

Beam angle

120°

CRI

>80

PANEL UGR



Pannello LED UGR<19

Materiale
Alluminio, diffusore in PMMA

Colore
Bianco

Sorgente luminosa
LED SMD 36W

Driver

Incluso

Colour temperature
4000K

Number of light sources

1

UGR

<19

Luminous Flux
3240 Lm

Lifetime and on/off
30.000h ~ >15.000 on/off

Beam angle

120°

CRI

>80

LED panel UGR<19

Material
Aluminium, PMMA diffuser

Colour
White

Light source
LED SMD 36W

Driver

Included

Colour temperature
4000K

Number of light sources

1

UGR

<19

Luminous Flux
3240 Lm

Lifetime and on/off
30.000h ~ >15.000 on/off

Beam angle

120°

CRI

>80



CLASSE A CE EMC □



CLASSE A CE EMC □




LED-PANEL-60X60-UGR
8031440357524

3600 Lm PF 0,90

Misure - size
dimensioni in mm - size mm

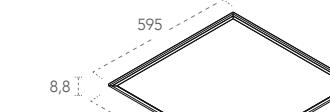




FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT



LED-PANEL-30X120-UGR
8031414878444

3200 Lm PF 0,90

Misure - size
dimensioni in mm - size mm

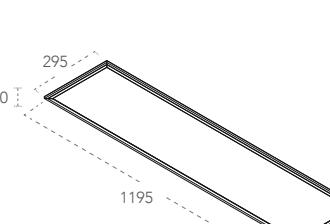

LED-PANEL-30X120 UGR






LED-PANEL-60X60-IP65
8031414876303

PF 0,90


FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

Misure - size
dimensioni in mm - size mm

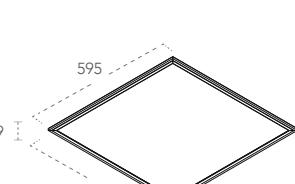

LED-PANEL-60X60 IP65 UGR

PANEL

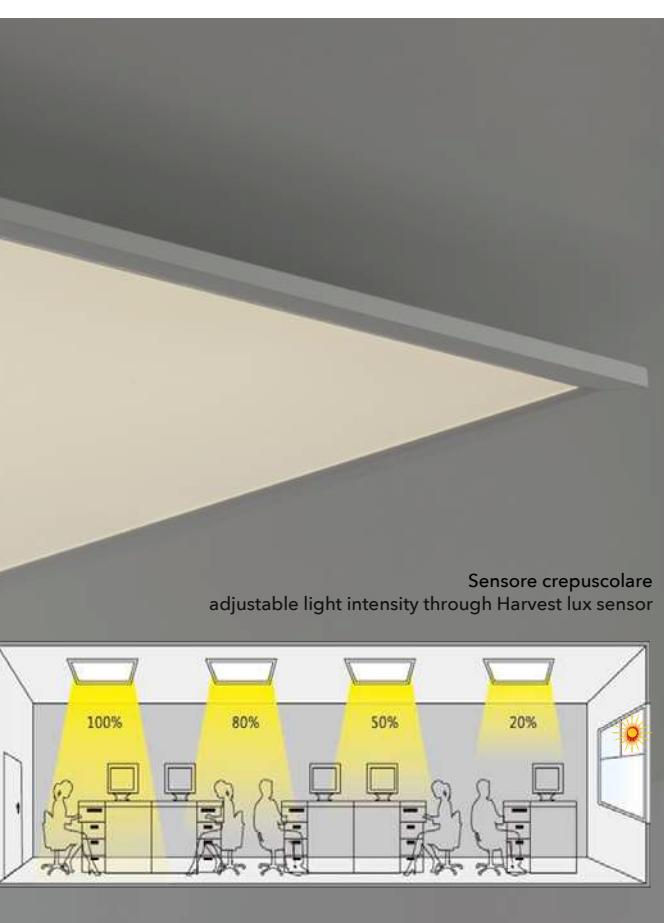

Pannello con sistema di variazione intensità luminosa intelligente tramite sensore LUX integrato

Panel light with adjustable light intensity through built-in harvest lux sensor

Materiale

Alluminio, diffusore in acrilico

Material

Aluminium, acrylic diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 40W

Light source

LED SMD 40W

Driver

Incluso

Driver

Included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Flusso luminoso

4000 Lm

Luminous Flux

4000 Lm

Durata e on/off

15.000h ~ >7500 on/off

Lifetime and on/off

15.000h ~ >7500 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80




LED-PANEL-60X60-SENS
8031414861897

40W PF 0,90


Misure - size

dimensioni in mm - size mm



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

PHOTOMETRIC CURVE
OF THE PRODUCT

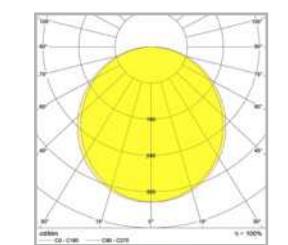

LED-PANEL-60X60-SENS





LED-PANEL-30X120-SENS
8031414861880

40W PF 0,90


Misure - size

dimensioni in mm - size mm

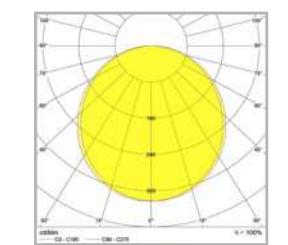

LED-PANEL-30X120-SENS

PANEL

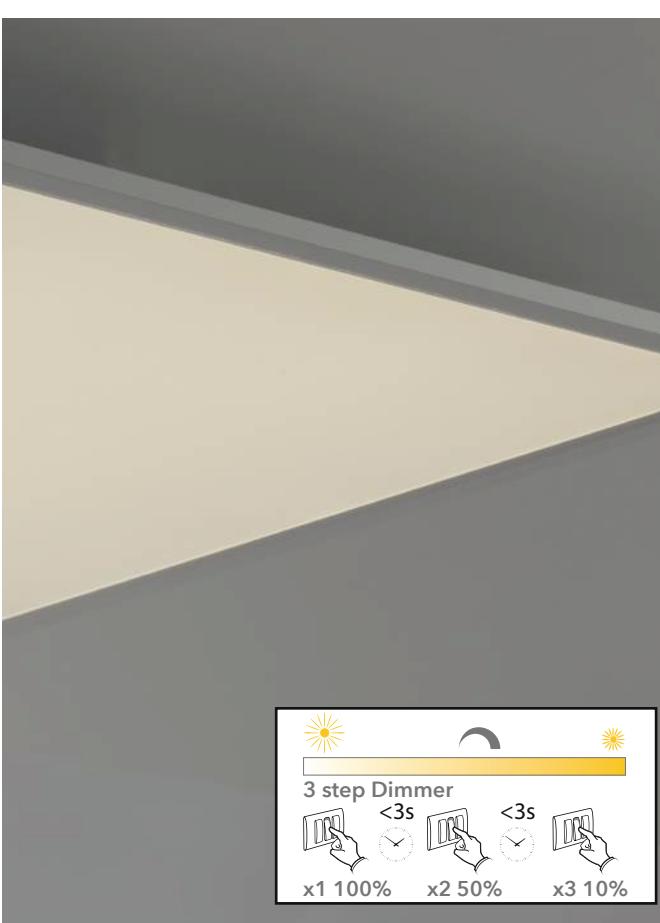

Pannello con sistema di variazione intensità di luce in 3 step tramite interruttore

Panel light with three step dimmer by switch

Materiale

Alluminio, diffusore in acrilico

Material

Aluminium, acrylic diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 40W

Light source

LED SMD 40W

Driver

Incluso

Driver

Included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Dimmer

3 step dimmer (x1 100%, x2 50%; x3 10%)

Dimmer

3 step dimmer (x1 100%, x2 50%; x3 10%)

Flusso luminoso

3600 Lm max

Luminous Flux

3600 Lm max

Durata e on/off

15.000h ~ >7500 on/off

Lifetime and on/off

15.000h ~ >7500 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80





LED-PANEL-60x60-DIM
8031414861026

40W PF 0,90

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

Misure - size

dimensioni in mm - size mm




LED-PANEL-60x60-DIM



LED-PANEL-30x120-DIM
8031414861033

40W PF 0,90



LED-PANEL-30x120-DIM

PANEL



Pannello con sistema di variazione colorazione luce RGB e luce bianca, con radiocomando (incluso)

Panel light RGB and natural white light adjustable with radio frequency remote control (included)

Materiale

Alluminio, diffusore in acrilico

Material

Aluminium, acrylic diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 40W

Light source

LED SMD 40W

Driver

Incluso

Driver

Included

Temperatura colore

RGB + 4000K


Colour temperature

RGB + 4000K


Dimmer

Dimmerabile con radiocomando 2.4G (incluso)

Dimmer

Dimmable with radio frequency 2.4G remote control (included)

Punti luce

1

Number of light sources

1

Flusso luminoso

3000 Lm

Luminous Flux

3000 Lm

Durata e on/off

15.000h ~ >7500 on/off

Lifetime and on/off

15.000h ~ >7500 on/off

Angolo di luce

120°

Beam angle



120°

CRI


>80

CRI

>80



CLASSE A CE EMC

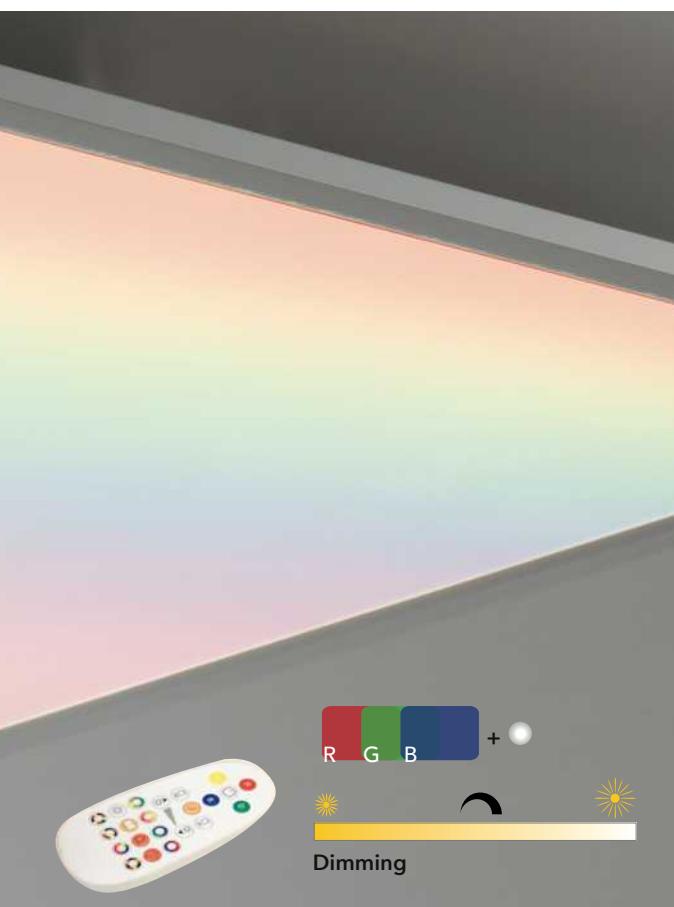

PANEL



Pannello con sistema di variazione gradi Kelvin e intensità di luce, con radiocomando (incluso)

Panel light adjustable kelvin and luminous flux with radio frequency remote control (included)

Materiale

Alluminio, diffusore in acrilico

Material

Aluminium, acrylic diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 40W

Light source

LED SMD 40W

Driver

Incluso

Driver

Included

Temperatura colore

CCT


Colour temperature

CCT


Dimmer

Dimmerabile con radiocomando 2.4G (incluso)

Dimmer

Dimmable with radio frequency 2.4G remote control (included)

Flusso luminoso

3600 Lm

Luminous Flux

3600 Lm

Durata e on/off

15.000h ~ >7500 on/off

Lifetime and on/off

15.000h ~ >7500 on/off

Angolo di luce

120°

Beam angle

120°

CRI


>80

CRI

>80



CLASSE A CE EMC

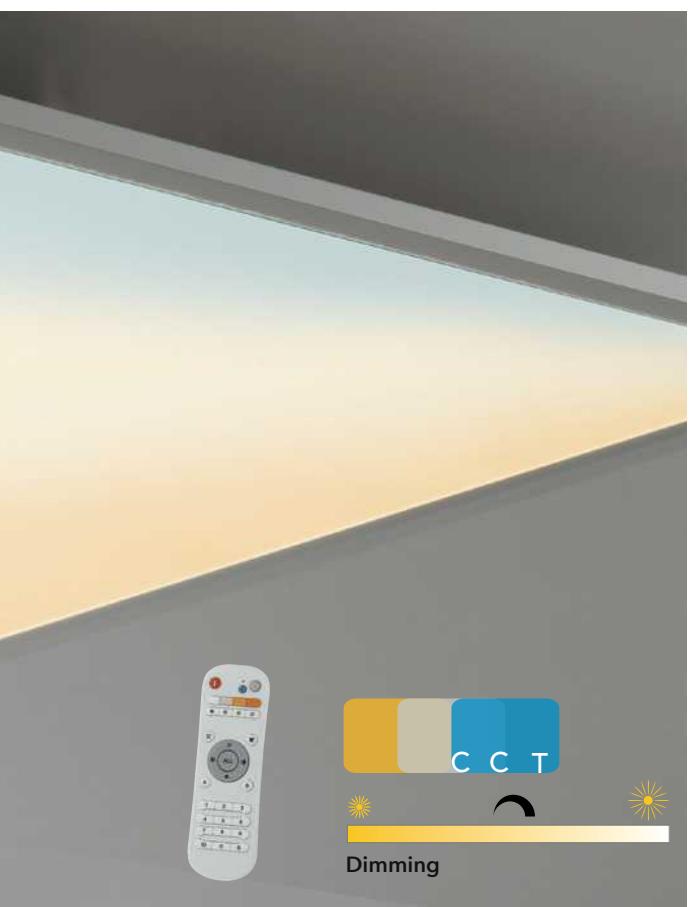


LED-PANEL-60x60-RGBW
8031414861064

40W PF 0,90


Misure - size

dimensioni in mm - size mm

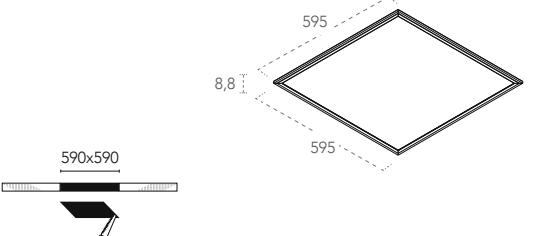

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

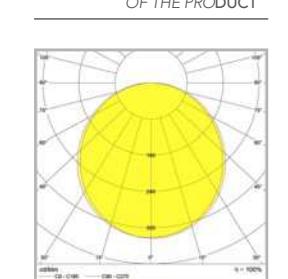

LED-PANEL-60x60-RGBW




LED-PANEL-60x60-CCT
8031414861040

40W PF 0,90


Misure - size

dimensioni in mm - size mm

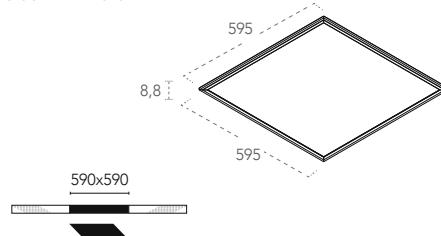

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT

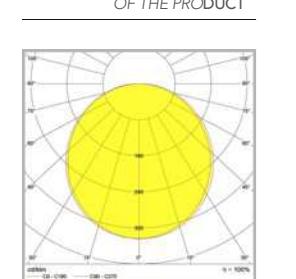

LED-PANEL-60x60-CCT





LED-PANEL-30x120-CCT
8031414861057

40W PF 0,90

Misure - size

dimensioni in mm - size mm

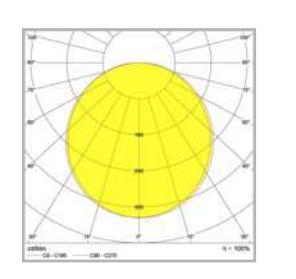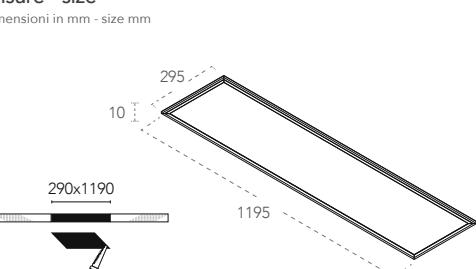

LED-PANEL-30x120-CCT

PANEL



Pannello con doppia emissione di luce

Panel with double emitting light

Materiale

Alluminio, diffusore in acrilico

Material

Aluminium, acrylic diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 40W

Light source

LED SMD 40W

Driver

Incluso

Driver

Included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Flusso luminoso

4000 Lm (↑ 2000 + ↓ 2000)

Luminous Flux

4000 Lm (↑ 2000 + ↓ 2000)

Durata e on/off

15.000h ~ >7500 on/off

Lifetime and on/off

15.000h ~ >7500 on/off

Angolo di luce

↑ 110° + ↓ 110°

Beam angle


↑ 110° + ↓ 110°

CRI

>80

CRI

>80

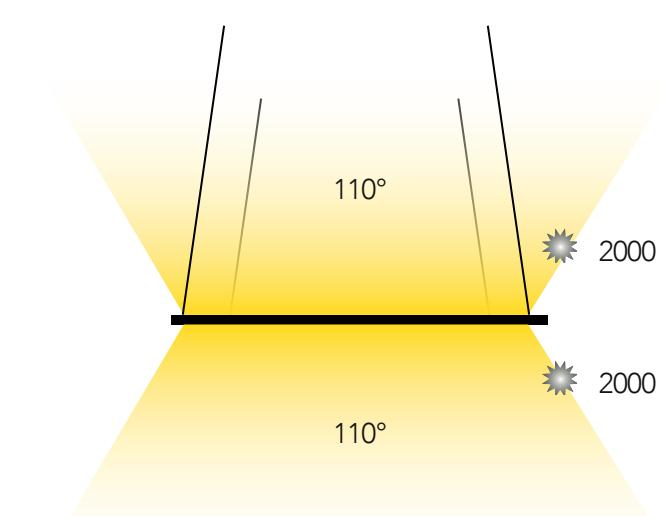

PANEL




LED-PANEL-60X60-BIS
8031414865383

40W PF 0,90

Kit cavi acciaio ed elettrico 1,5 metri INCLUSI.
steel hanging cable and electric cable 1,5 meters INCLUDED

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

LED-PANEL-60X60-BIS

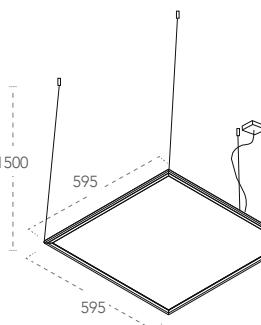

LED-PANEL-60X60-BIS

Kit cavi acciaio ed elettrico 1,5 metri INCLUSI.
steel hanging cable and electric cable 1,5 meters INCLUDED

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT


LED-PANEL-30X120-BIS



LED-PANEL-30X120-BIS
8031414865376

40W PF 0,90

Misure - size
dimensioni in mm - size mm

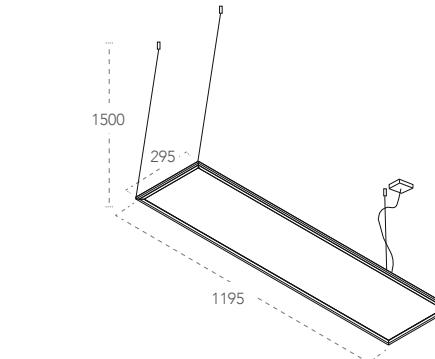


LED-PANEL-30X120-BIS

Kit cavi acciaio ed elettrico 1,5 metri INCLUSI.
steel hanging cable and electric cable 1,5 meters INCLUDED

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF THE PRODUCT

LED-PANEL-30X120-BIS



Accessorio base soffitto per driver - Metal canopy base for LED panel LED-PANEL-BASE pag.155



PANEL STRUTTURA



Struttura in metallo per montaggio a plafoniera per pannello LED
Metal structure for panel light surface mount

Materiale

Metallo

Material

Metal

Colore

Bianco goffrato, grigio goffrato o nero goffrato

Color

Embossed white - embossed grey - embossed black

LED-PANEL-60X60-MT
8031414866212

Struttura per pannello LED*
Aluminum frame for LED panel


LED-PANEL-60X60-MT GR
8031414871452

Struttura per pannello LED*
Aluminum frame for LED panel

LED-PANEL-60X60-MT NER
8031414871469

Struttura per pannello LED*
Aluminum frame for LED panel


Misure - size
dimensioni in mm - size mm



LED-PANEL-60X120-MT
8031414869176

Struttura per pannello LED*
Aluminum frame for LED panel

Misure - size
dimensioni in mm - size mm



LED-PANEL-30X120-MT
8031414866199

Struttura per pannello LED*
Aluminum frame for LED panel


LED-PANEL-30X120-MT GR
8031414871506

Struttura per pannello LED*
Aluminum frame for LED panel

LED-PANEL-30X120-MT NER
8031414871476

Struttura per pannello LED*
Aluminum frame for LED panel

Misure - size
dimensioni in mm - size mm




PANEL ACCESSORI




LED-PANEL-KIT
8031440352451

Kit 6 cavi 150 cm in acciaio per sospensione
Steel cable kit 150 cm for suspension




LED-PANEL-GANCI
8031440361903

Kit molle 4pz.
Metal spring kit 4pcs.




LED-PANEL-STAFFE
8031414866175

Kit 6 staffe in acciaio per pannello LED
Steel fixing bars for LED panel



LED-PANEL-BASE
8031414866236

Base a soffitto per driver pannello LED
Metal canopy base for LED panel
Misure - size 160x110x35mm

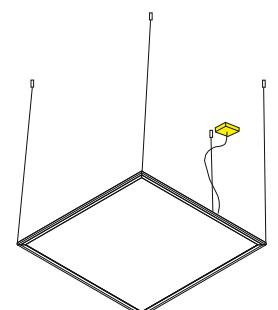

LED-PANEL-SOSP
8031440361781

Kit sospensione pannello cavo 1,5 m + scatola di connessione elettrica a soffitto
kit for suspension with 1,5 m cable + metal canopy with electric connection
Misure - size 120x120x60mm



* Accessorio non utilizzabile con articoli: LED-PANEL-60X60BK , LED-PANEL-F-60X60BK , LED-PANEL-30X120BK , LED-PANEL-F-30X120BK
Accessory can't be used with items: LED-PANEL-60X60BK , LED-PANEL-F-60X60BK , LED-PANEL-30X120BK , LED-PANEL-F-30X120BK

PANEL



Pannello con speaker bluetooth , sistema di variazione gradi Kelvin e di intensità di luce regolabili con radiocomando (incluso).

Panel light with bluetooth speaker, adjustable kelvin and luminous flux with radio frequency remote control (included).

Materiale

Alluminio, diffusore in acrilico

Material

Aluminium, acrylic diffuser

Colore

Colour

Bianco

White

Sorgente luminosa

Light source

LED SMD 42W - 23W

LED SMD 42W - 23W

Driver

Driver

Incluso

Included

Speaker

Speaker

2x5W

bluetooth 4.2 connection max 10 meters

Temperatura colore

Colour temperature

CCT

CCT

Dimmer

Dimmer

Dimmerabile con radiocomando 2.4G (incluso)

Dimmable with radio frequency 2.4G remote control (included)

Punti luce

Number of light sources

1

1

Flusso luminoso

Luminous Flux

3360 Lm - 1840 Lm

3360 Lm - 1840 Lm

Durata e on/off

Lifetime and on/off

20.000h ~ >10.000 on/off

20.000h ~ >10.000 on/off

Angolo di luce

Beam angle

120°

120°

CRI

CRI

>80

>80



PANEL




Speaker

2x5W connessione bluetooth 4.2 max 10 metri

2x5W bluetooth 4.2 connection max 10 meters

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT



LED-PANEL-60X60-DJ

LED-PANEL-60X60-DJ
8031414876242

42W


RADIOCOMANDO INCLUSO

REMOTE CONTROL INCLUDED



Misure - size

dimensioni in mm - size mm

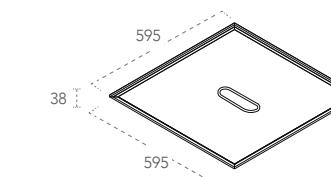


Speaker

2x5W connessione bluetooth 4.2 max 10 metri

2x5W bluetooth 4.2 connection max 10 meters

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF THE PRODUCT



LED-PANEL-30X60-DJ

LED-PANEL-30X60-DJ
8031414876259

23W


RADIOCOMANDO INCLUSO

REMOTE CONTROL INCLUDED



Misure - size

dimensioni in mm - size mm

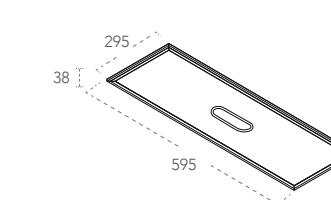

KLIO



Plafoniera in alluminio pressofuso

Aluminium ceiling lamp



Materiale

Alluminio, diffusore in acrilico

Colore

Bianco goffrato - nero goffrato

Sorgente luminosa

LED SMD 16W - 22W - 36W - 64,8W

Driver

Incluso

Temperatura colore

3000K - 4000K

Material

Aluminium, acrylic diffuser

Colour

Embossed white - Embossed black

Light source

LED SMD 16W - 22W - 36W - 64,8W

Driver

Included

Colour temperature

3000K - 4000K

Punti luce

1

Flusso luminoso

- 1300 Lm - 1300 Lm
- 2200 Lm - 2000Lm
- 3600 Lm - 2900 Lm
- 5500 Lm - 6200 Lm

Durata e on/off

25.000h ~ >10.000 on/off

Angolo di luce

120°


CRI

>80




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT




LED-KLIO-Q11



LED-KLIO-Q17



LED-KLIO-Q21



LED-KLIO-Q40

KLIO



LED-KLIO-Q11 NER
8031414868001

16W 1300 LM



LED-KLIO-Q11C
8031414875672

16W 1300 LM

LED-KLIO-Q11
8031440363563

16W 1300 LM

Misure - size - Size
dimensioni in mm - size mm

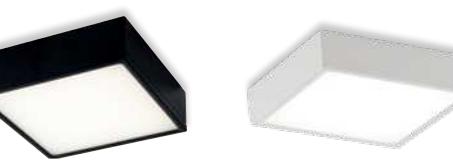

LED-KLIO-Q17 NER
8031414868018

22W 2000 LM


LED-KLIO-Q17C
8031414875689

22W 2200 LM

LED-KLIO-Q17
8031440363570

22W 2000 LM

Misure - size - Size
dimensioni in mm - size mm



LED-KLIO-Q21 NER
8031414868025

36W 2900 LM PF 0,90


LED-KLIO-Q21C
8031414875696

36W 3600 LM PF 0,90

LED-KLIO-Q21
8031440363549

36W 2900 LM PF 0,90

Misure - size - Size
dimensioni in mm - size mm



LED-KLIO-Q40 NER
8031414868063

64,8W 6200 LM PF 0,90


LED-KLIO-Q40C
8031414875702

64,8W 5500 LM PF 0,90

LED-KLIO-Q40
8031414868070

64,8W 6200 LM PF 0,90

Misure - size - Size
dimensioni in mm - size mm



KLIO



Plafoniera in alluminio pressofuso

Aluminium ceiling lamp

Materiale

Alluminio, diffusore in acrilico

Colore

Bianco goffrato - nero goffrato

Sorgente luminosa

LED SMD 16W - 22W - 36W - 64,8W

Driver

Incluso

Temperatura colore

3000K - 4000K



Punti luce

1

Flusso luminoso

- 1300 Lm - 1300 Lm
- 2200 Lm - 2000Lm
- 3600 Lm - 2900 Lm
- 5500 Lm - 6200 Lm

Durata e on/off

25.000h ~ >10.000 on/off

Angolo di luce

120°


CRI

>80




FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF THE PRODUCT




LED-KLIO-R11



LED-KLIO-R17



LED-KLIO-R21



LED-KLIO-R40

KLIO



LED-KLIO-R11 NER
8031414868032

16W 1300 LM

LED-KLIO-R11C
8031414875719

16W 1300 LM

LED-KLIO-R11
8031440358675

16W 1300 LM

Misure - size - Size
dimensioni in mm - size mm



LED-KLIO-R17 NER
8031414868049

22W 2000 LM


LED-KLIO-R17C
8031414875726

22W 2200 LM

LED-KLIO-R17
8031440363587

22W 2000 LM

Misure - size - Size
dimensioni in mm - size mm



LED-KLIO-R21 NER
8031414868056

36W 2900 LM PF 0,90

LED-KLIO-R21C
8031414875733

36W 3600 LM PF 0,90

LED-KLIO-R21
8031440363594

36W 2900 LM PF 0,90

Misure - size - Size
dimensioni in mm - size mm



LED-KLIO-R40 NER
8031414868094

64,8W 6200 LM PF 0,90

LED-KLIO-R40C
8031414875740

64,8W 5500 LM PF 0,90

LED-KLIO-R40
8031414868087

64,8W 6200 LM PF 0,90

Misure - size - Size
dimensioni in mm - size mm



MIG



Plafoniera in alluminio luce spot anti-abbagliamento Aluminium surface mount anti-glare spot light

Materiale

Struttura in alluminio riflettore PC

Material

Aluminium structure with PC reflector

Colore

Bianco goffrato con riflettore cromato
Nero goffrato con riflettore nero lucido

Colour

Embossed white with chrome reflector
Embossed black with glossy black reflector

Sorgente luminosa

LED COB 20W

Light source

COB LED 20W

Driver

Incluso

Driver

Included


Temperatura colore

3000K - 4000K



Colour temperature

3000K - 4000K



Punti luce

1

Number of light sources

1

Flusso luminoso

2000Lm

Luminous Flux

2000Lm

Durata e on/off

50.000 h ~ >25.000 on/off

Lifetime and on/off

50.000 h ~ >25.000 on/off

Angolo di luce

45°

Beam angle

45°

CRI

>90

CRI

>90



LED-MIG-R20 BCO
8031414866823

LED-MIG-R20 NER
8031414866717

LED-MIG-R20C BCO
8031414874064

LED-MIG-R20C NER
8031414874057

Misure - size
dimensioni in mm - size mm



LED-MIG R 20W



LED-MIG-Q20 BCO
8031414870981

LED-MIG-Q20 NER
8031414866731

LED-MIG-Q20C BCO
8031414874118

LED-MIG-Q20C NER
8031414874101

Misure - size
dimensioni in mm - size mm



LED-MIG Q 20W

TOWN



Plafoniera in alluminio luce spot GU10

Aluminium surface mount GU10 spot light

Materiale

Alluminio

Material

Alluminium

Colore

Bianco matto - nero matto

Colour

Matt white - matt black

Sorgente luminosa

GU10 230V~50Hz

Light source

GU10 230V~50Hz

Punti luce

1

Number of light sources

1



I-TOWN-R BCO

8031414868179

1XGU10 MAX 35W

Lampadina non inclusa

I-TOWN-R NER


8031414868162

1XGU10 MAX 35W

Lampadina non inclusa

Misure - size

dimensioni in mm - size mm



I-TOWN-Q BCO

8031414868155

1XGU10 MAX 35W

Lampadina non inclusa

I-TOWN-Q NER


8031414868148

1XGU10 MAX 35W

Lampadina non inclusa

Misure - size

dimensioni in mm - size mm



Verniciabile
PaintableAttacco sorgente
Lampholder

SPACE

Plafoniera struttura in gesso verniciabile

Gypsum ceiling lamp paintable




SPACE

Plafoniera in gesso verniciabile ghiera orientabile


Gypsum ceiling lamp paintable with adjustable metal ring

Verniciabile
PaintableAttacco sorgente
SourceOrientabile
Adjustable
15°I-SPACE-S-Q1
8031439521264


1XGU10 MAX 9W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmI-SPACE-S-R1
8031439531263


1XGU10 MAX 9W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmI-SPACE-Q1
8031434171211

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmI-SPACE-R1
8031434141214

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm



Verniciabile
Paintable



Luce biemissione
Biemission light



GU10

Attacco sorgente
Lampholder


BANJIE

Applique a parete in gesso verniciabile

Gypsum wall lamp paintable.



Misure - size
dimensioni in mm - size mm




I-BANJIE-S-AP
8031440365475

2XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included



Misure - size
dimensioni in mm - size mm




I-BANJIE-L-AP
8031440365499

2XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included



Misure - size
dimensioni in mm - size mm



I-BANJIE-AP4
8031414866533

4XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included



BANJIE

Plafoniera in gesso verniciabile

Gypsum wall lamp paintable.



Verniciabile
Paintable




GU10
Attacco sorgente
Lampholder



I-BANJIE-PL1
8031414867479

1XGU10 MAX 35W


Lampadina non inclusa
Light bulb not included



I-BANJIE-PL3
8031414867486

3XGU10 MAX 9W



Lampadina non inclusa
Light bulb not included

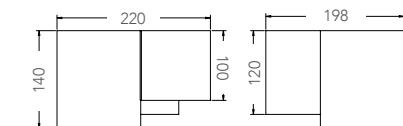

I-BANJIE-PL5
8031414867493

5XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

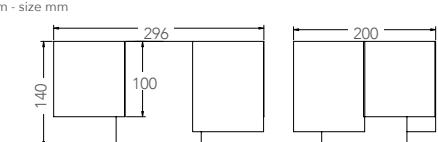



Verniciabile
Paintable



Luce biemissione
Biemission light



GU10

Attacco sorgente
Lampholder

FOSTER

Applique a parete in gesso verniciabile


Gypsum wall lamp paintable.



I-FOSTER-AP
8031414861385

2XGU10 MAX 9W


Lampadina non inclusa
Light bulb not included



I-FOSTER-AP4
8031414867509

4XGU10 MAX 9W


Lampadina non inclusa
Light bulb not included



I-FOSTER-PL1
8031414867516

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included



FOSTER



Verniciabile
Paintable



Attacco sorgente
Lampholder



Composizioni tipo
realizzate con
2pz I-FOSTER-PL5
Example of compo-
sition realized with
2pcs I-FOSTER-PL5




Plafoniera in gesso verniciabile.
Gypsum ceiling lamp paintable.



I-FOSTER-PL25
8031414876013

2XGU10 MAX 35W


Lampadina non inclusa
Light bulb not included




I-FOSTER-PL3
8031414867523

3XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

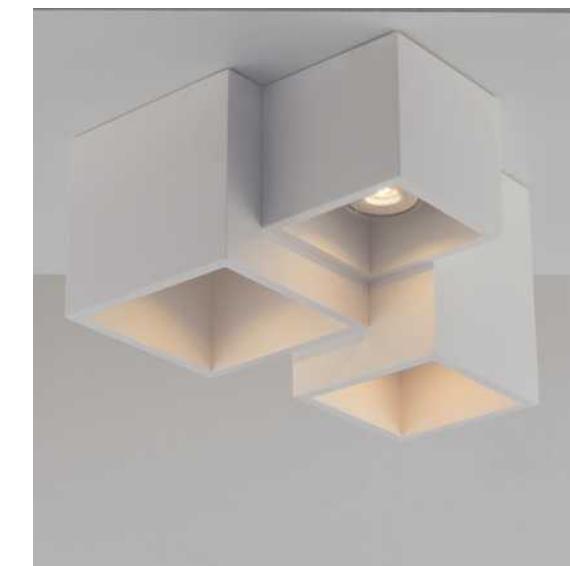

Misure - size
dimensioni in mm - size mm

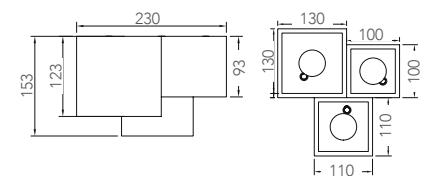


I-FOSTER-PL5
8031414867530

5XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included





Misure - size
dimensioni in mm - size mm

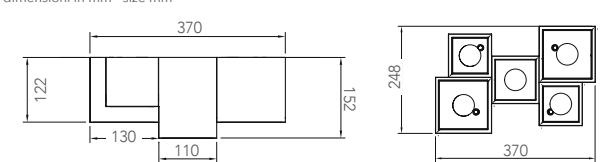


Verniciabile
PaintableAttacco sorgente
Lampholder

Plafoniere componibili in gesso verniciabile con diffusore in acrilico

Modulable gypsum ceiling lamp paintable with acrylic diffuser

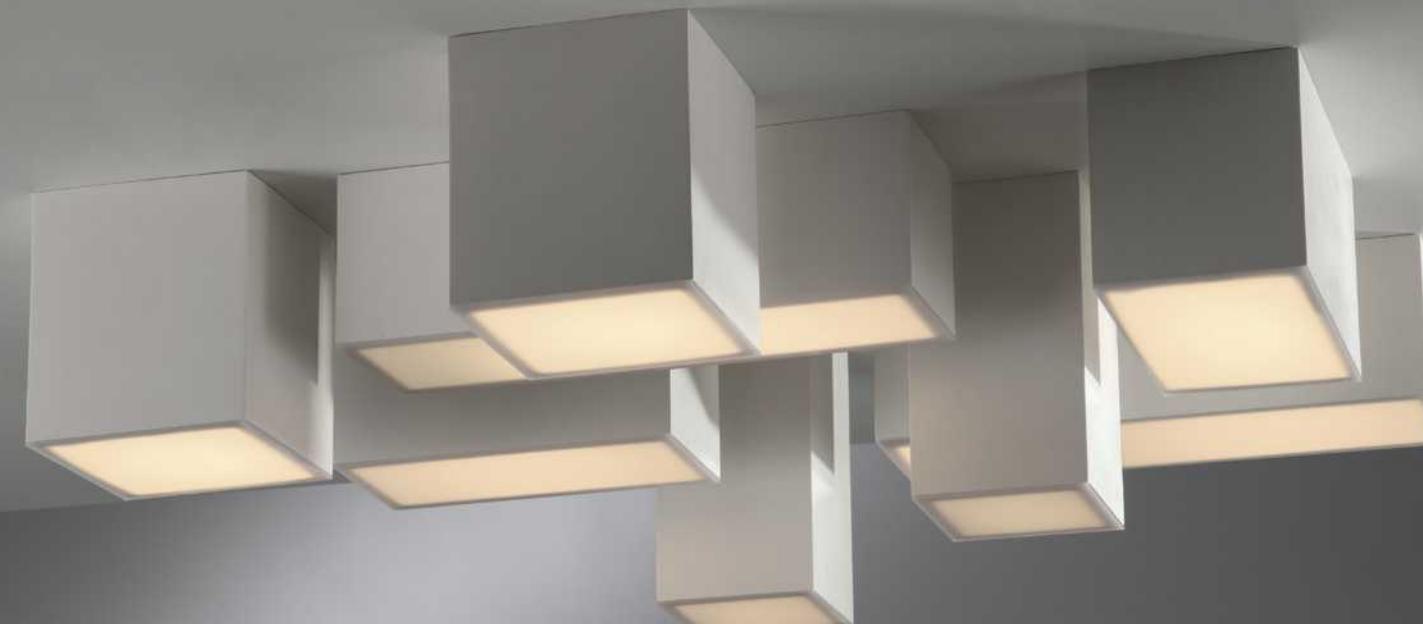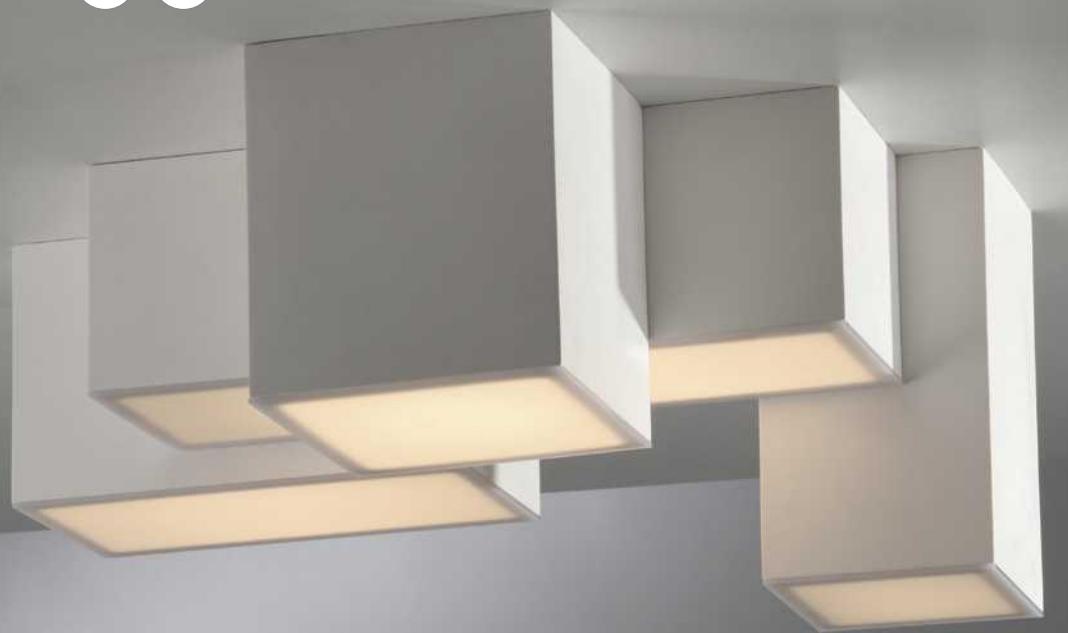I-LIVING-PL14
8031414876020


1XE27 MAX 15W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

CE

I-LIVING-PL11
8031414876037


1XE14 MAX 13W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

CE

I-LIVING-PL23
8031414876044


2XE14 MAX 13W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

CE

I-LIVING-PL36
8031414876051

4XE14 MAX 13W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

CE

GABRIEL

Plafoniera in gesso verniciabile con diffusore in vetro


Gypsum ceiling lamp paintable with glass diffuser.

Verniciabile
PaintableAttacco sorgente
Lampholder


GABRIEL

I-GABRIEL/PL25Q
8031434101218

2XE27 MAX 25W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmI-GABRIEL/PL30R
8031434111217

2XE27 MAX 25W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

ROCK

Plafoniera in gesso verniciabile o cemento naturale con led integrato

Gypsum paintable or natural concrete ceiling lamp with built-in LED.

Sorgente luminosa
Light source

ROCK

Driver
inclusoDriver
IncludedSorgente luminosa
LED SMD 24WLight source
SMD LED 24WTemperatura colore
4000KColor temperature
4000K

Flusso luminoso

Luminous flux

2000 Lm

2000 Lm

Durata e on/off

Lifetime and on/off

25.000 h - 12.500 on/off

25.000 h - 12.500 on/off

Angolo di luce

Beam angle

120°

120°


CRI

CRI


>80

LED-ROCK-Q
8031414867660

24W

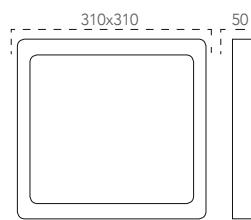Gesso Verniciabile
Gypsum paintableMisure - size
dimensioni in mm - size mmLED-ROCK-CM-Q
8031414867646

24W

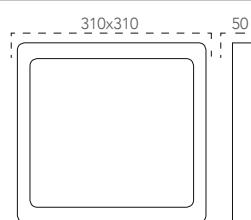Misure - size
dimensioni in mm - size mm



Verniciabile
Paintable



Luce biemissione
Biemission light



Sorgente luminosa
Light source

ORTISEI

Driver

incluso

Driver

included

Sorgente luminosa

LED SMD 8W - 11,8W - 19,9W

Light source

LED SMD 8W - 11,8W - 19,9W

Temperatura colore

4000K

Colour temperature

4000K

Flusso luminoso

516Lm, 956Lm, 1649Lm

Luminous flux

516Lm, 956Lm, 1649Lm

Durata e on/off

25.000 h - 12.500 on/off

Lifetime and on/off

25.000 h - 12.500 on/off

Angolo di luce

↑ 120° + ↓ 120°

Beam angle

↑ 120° + ↓ 120°

CRI

>80

CRI



>80



LED-ORTISEI-AP22
8031414866571

8W - 516 Lm



Misure - size
dimensioni in mm - size mm

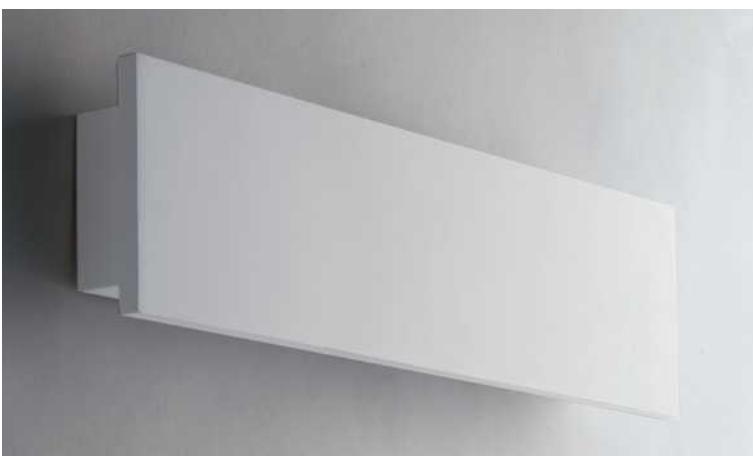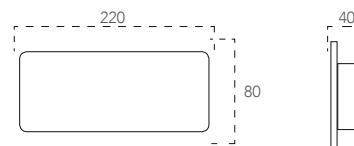

LED-ORTISEI-AP40
8031414866588

11,8W - 956 Lm


Misure - size
dimensioni in mm - size mm

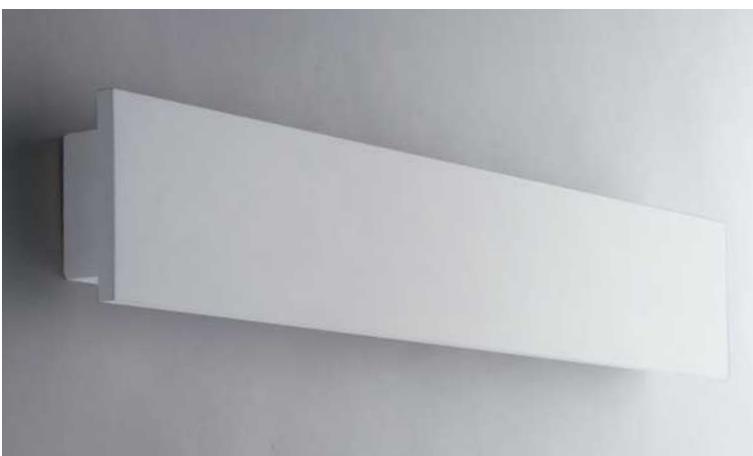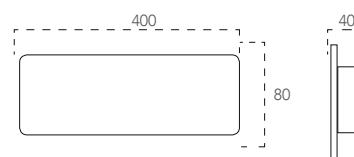

LED-ORTISEI-AP60
8031414866557

19,9W - 1649 Lm

Misure - size
dimensioni in mm - size mm

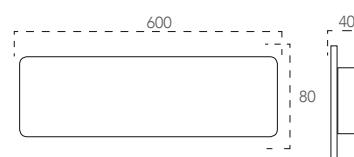

Verniciabile
PaintableLuce biemissione
Biemission lightG9
Attacco sorgente
LampholderLampadina non inclusa
bulbs not included

LEIRON

Applique a parete in gesso verniciabile.

Gypsum wall lamp paintable.





MONTBLANC

Applique a parete in gesso verniciabile.

Gypsum wall lamp paintable.

I-LEIRON-AP
8031436741238

1XG9 MAX 25W

Misure - Size
dimensioni in mm - size mmI-MONTBLANC-AP
8031414861354Misure - Size
dimensioni in mm - size mm

Verniciabile
PaintableLuce biemissione
Biemission lightG9
Attacco sorgente
LampholderLampadina non inclusa
bulbs not included

SHINE

Applique a parete in gesso verniciabile.

Gypsum wall lamp paintable.






ASTRON

Applique a parete in gesso verniciabile.

Gypsum wall lamp paintable.

Verniciabile
PaintableLuce biemissione
Biemission lightG9
Attacco sorgente
LampholderLampadina non inclusa
bulbs not includedI-SHINE-AP
8031434191219

1XG9 MAX 25W

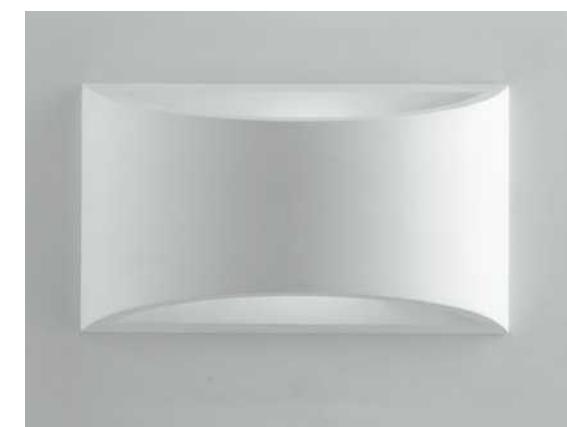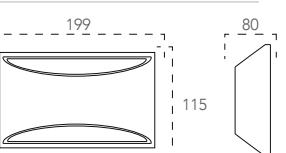Misure - Size
dimensioni in mm - size mmI-ASTRON-AP
8031414862412Misure - Size
dimensioni in mm - size mm

Verniciabile
PaintableLuce biemissione
Biemission lightAttacco sorgente
LampholderLampadina non inclusa
bulbs not included

CERVINIA

Applique a parete in gesso verniciabile con diffusore in acrilico.

Gypsum wall lamp paintable with acrylic diffuser




SCOTT

Applique a parete in gesso verniciabile.


Gypsum wall lamp paintable.

Verniciabile
PaintableLuce biemissione
Biemission lightAttacco sorgente
LampholderLampadina non inclusa
bulbs not includedI-CERVINIA-AP
8031414873555

1XE27 MAX 12W

Misure - Size
dimensioni in mm - size mmI-SCOTT-AP
8031414876082

2XE14 MAX 20W

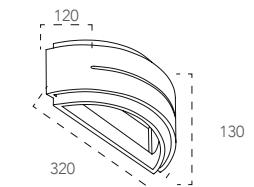Misure - Size
dimensioni in mm - size mm

RUBIK

Applique a parete in gesso verniciabile o in cemento naturale.

Gypsum paintable or concrete wall lamp.




Luce biemissione
Biemission light



G9
Attacco sorgente
Lampholder



Lampadina non inclusa
bulbs not included

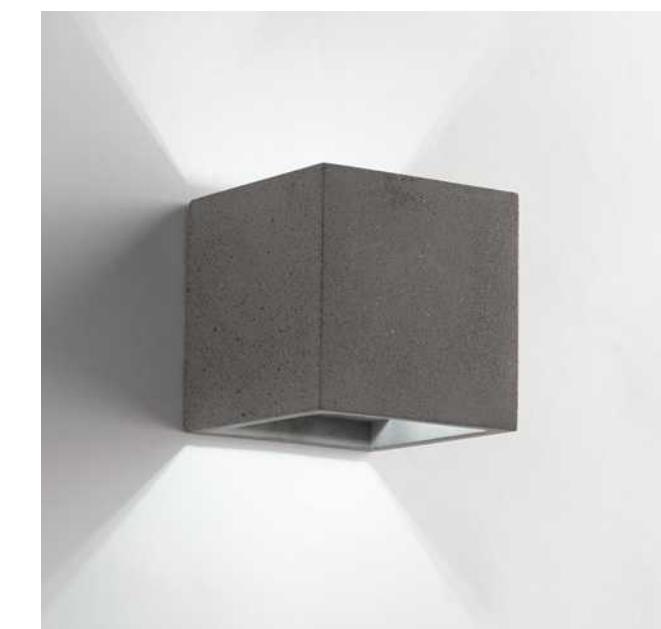

RUBIK


I-RUBIK-AP2
8031414876075

2XG9 MAX 25W



Gesso Verniciabile
Gypsum paintable

Misure - Size
dimensioni in mm - size mm




I-RUBIK-AP
8031440362146

1XG9 MAX 25W



Gesso Verniciabile
Gypsum paintable

Misure - Size
dimensioni in mm - size mm




I-RUBIK-CM-AP
8031414867608

1XG9 MAX 25W



Misure - Size
dimensioni in mm - size mm



Applique a parete in gesso verniciabile o cemento naturale.

Gypsun paintable or concrete wall lamp.



Luce biemissione
Biemission light



G9

Attacco sorgente
Lampholder



adina non inclusa



MOSES




I-MOSES-AP
8031434181210

1XG9 MAX 25W



Gesso Verniciabile
Gypsun paintable

Misure - Size




I-MOSES-CM-AP
0001111017115

1XG8 MAX 35W



Misure - Size




PIROETTE

Applique a parete in gesso verniciabile.



Gypsum wall lamp paintable.

Verniciabile
PaintableLuce biemissione
Biemission lightAttacco sorgente
LampholderLampadina non inclusa
bulbs not included



PIROETTE

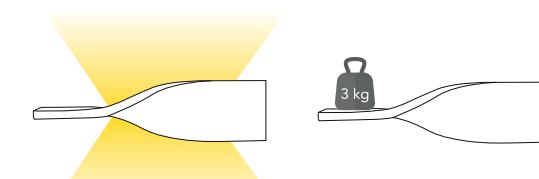I-PIROETTE-AP36
8031414873562

1XR7S MAX 7W

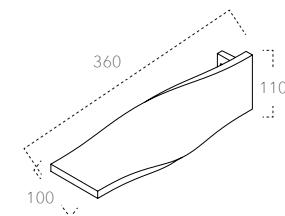Misure - Size
dimensioni in mm - size mmI-PIROETTE-AP56
8031414873579

1XR7S MAX 20W

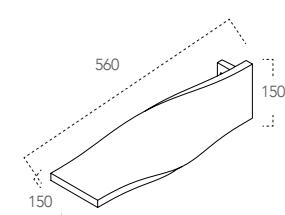Misure - Size
dimensioni in mm - size mm

CORTINA

Applique a parete in gesso verniciabile , diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco

Gypsum wall lamp paintable, lower diffuser in satin glass and upper diffuser white acrylic.

Verniciabile
PaintableLuce biemissione
Biemission lightE14
Attacco sorgente
LampholderLampadina non inclusa
bulbs not included



CORTINA

I-CORTINA-S-AP
8031414866472

1XE14 MAX 13W

I-CORTINA-AP
8031414861347

2XE14 MAX 13W

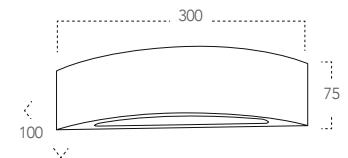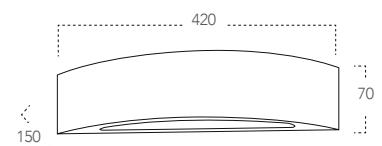Misure - Size
dimensioni in mm - size mmMisure - Size
dimensioni in mm - size mm

CANDIDA

Applique a parete in gesso verniciabile o cemento , diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco
Gypsum wall lamp paintable or concrete, lower diffuser in satin glass and upper diffuser white acrylic.



Luce biemissione
Biemission light



E14
Attacco sorgente
Lampholder



Lampadina non inclusa
bulbs not included




Gesso Verniciabile
Gypsum paintable

I-CANDIDA-S-AP
8031414866502

1XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm

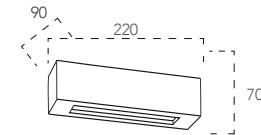


Gesso Verniciabile
Gypsum paintable

I-CANDIDA-AP
8031436751237

2XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm

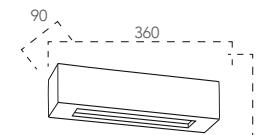


Gesso Verniciabile
Gypsum paintable

I-CANDIDA-L-AP
8031414865567

2XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm

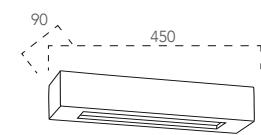


CEMENTO
CONCRETE

I-CANDIDA-CM-AP
8031414867592

2XE14 MAX 25W

Misure - Size
dimensioni in mm - size mm

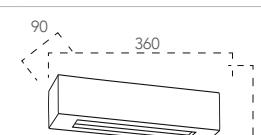

Verniciabile
PaintableLuce biemissione
Biemission lightAttacco sorgente
LampholderLampadina non inclusa
bulbs not included


GATSBY

Applique a parete in gesso verniciabile , diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco

Gypsum wall lamp paintable, lower diffuser in satin glass and upper diffuser white acrylic.

I-GATSBY-AP
8031414876068


2XE14 MAX 20W

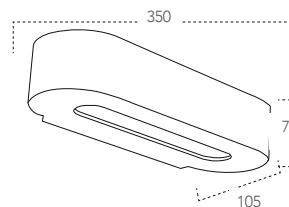Misure - Size
dimensioni in mm - size mm

STONE

Applique a parete in gesso effetto sassi


Gypsum wall lamp stone finish



E14

Attacco sorgente
LampholderLampadina non inclusa
bulbs not includedI-STONE-AP
8031414865291

1XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm

SANTORINI

Applique in gesso a parete angolare verniciabile con diffusione luminosa verso l'alto
Angular gypsum wall lamp paintable with upward light diffusion



Verniciabile
Paintable



E14
Attacco sorgente
Lampholder



Lampadina non inclusa
bulbs not included



MYKONOS

Applique in gesso a parete angolare verniciabile con doppia emissione di luce con diffusore vetro satinato
Angular gypsum wall lamp paintable with biemission light diffusion with satin glass diffuser



Verniciabile
Paintable



Luce biemissione
Biemission light



E14
Attacco sorgente
Lampholder




Lampadina non inclusa
bulbs not included



I-SANTORINI-AP
8031440351553

1XE14 MAX 13W


Misure - Size
dimensioni in mm - size mm

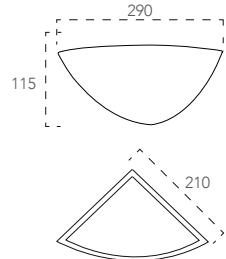

I-MYKONOS-AP
8031440351584

1XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm

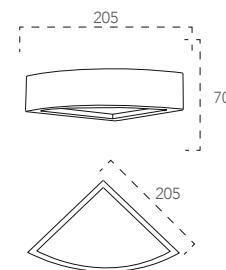



Verniciabile
Paintable



Attacco sorgente
Lampholder




Lampadina non inclusa
bulbs not included

ABEL

Applique a parete in gesso verniciabile con diffusione luminosa verso l'alto.


Gypsum wall lamp paintable with light diffusion upward

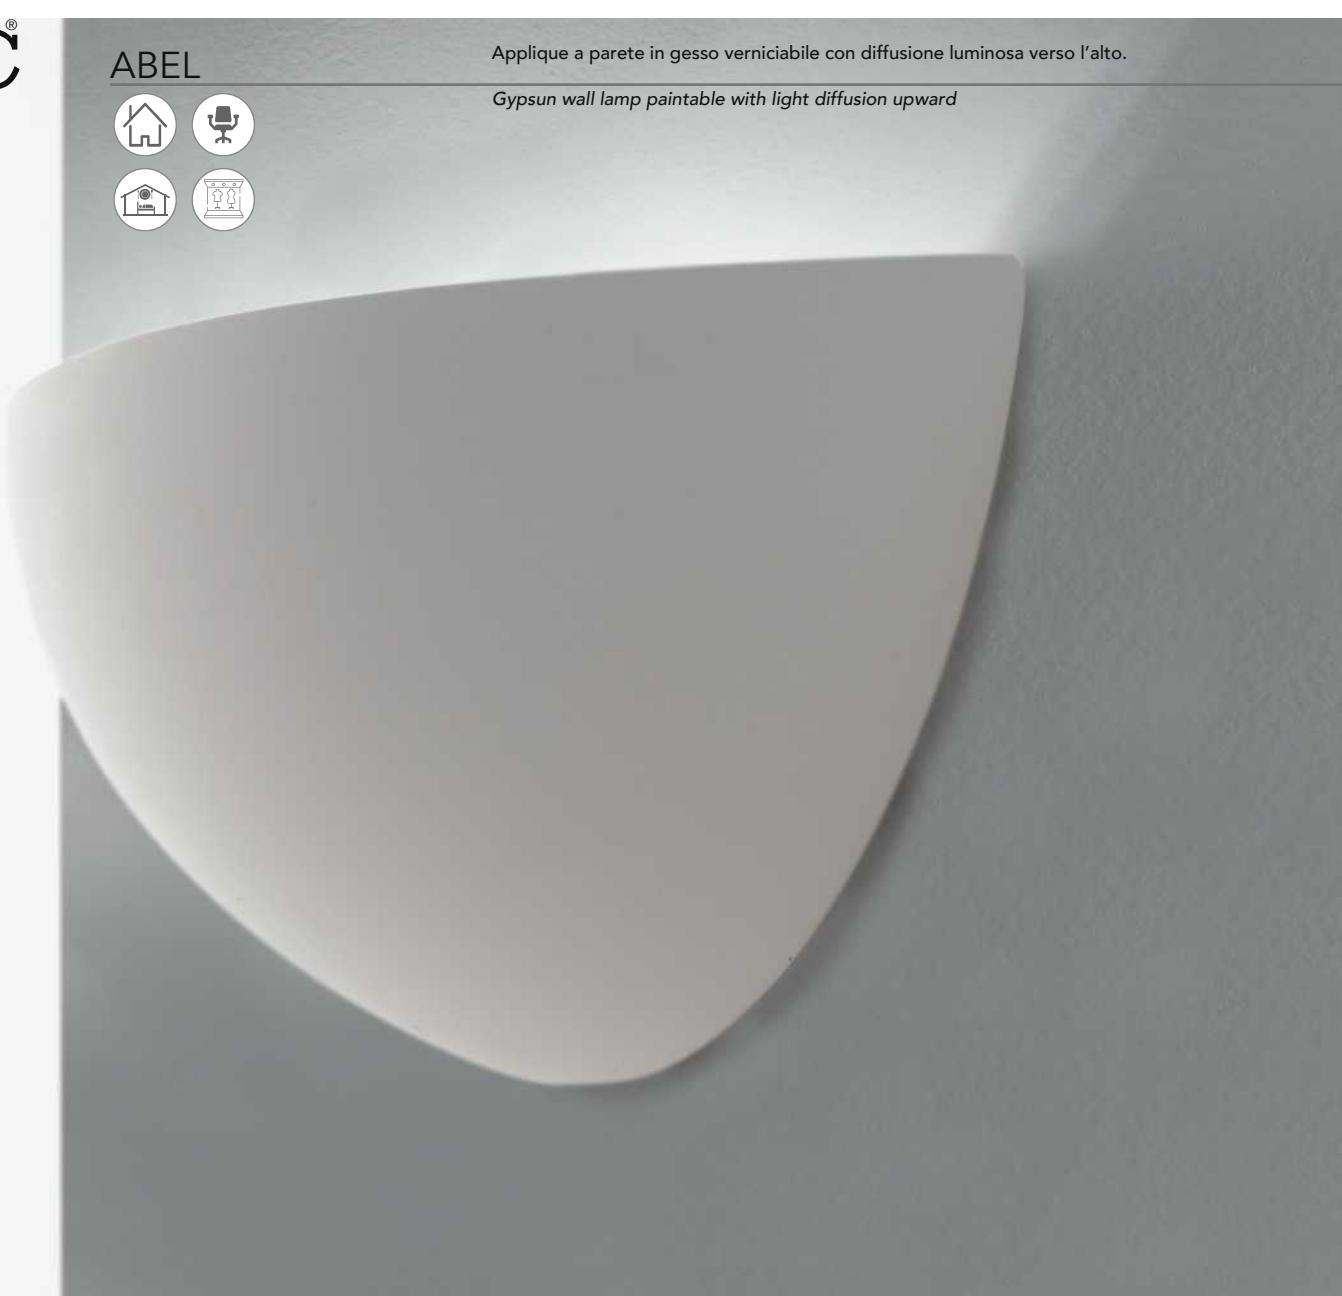

I-ABEL-AP
8031440362153

2XE14 MAX 25W

Misure - Size
dimensioni in mm - size mm



SESTRIERE

Applique a parete in gesso verniciabile con doppia emissione di luce


Gypsum wall lamp paintable with biemission light diffusion



I-SESTRIERE-AP
8031414861330

1XE27 MAX 40W

Misure - Size
dimensioni in mm - size mm

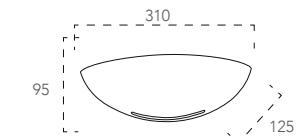

MORITZ

Applique a parete in gesso verniciabile.


Gypsum wall lamp paintable.

Verniciabile
PaintableE27
Attacco sorgente
LampholderLampadina non inclusa
bulbs not included


MORITZ

I-MORITZ-L-AP
8031414861361

1XE27 MAX 40W

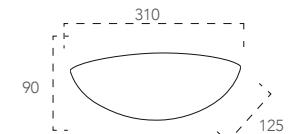Misure - Size
dimensioni in mm - size mmI-MORITZ-S-AP
8031414861378

1XE27 MAX 40W

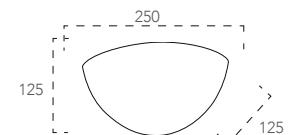
Misure - Size
dimensioni in mm - size mm

MORITZ




Applique a parete in gesso con finitura foglia oro, foglia argento, effetto legno noce o rovere sbiancato.


Gypsum wall lamp with finish gold leaf, silver leaf, walnut or oak effect.

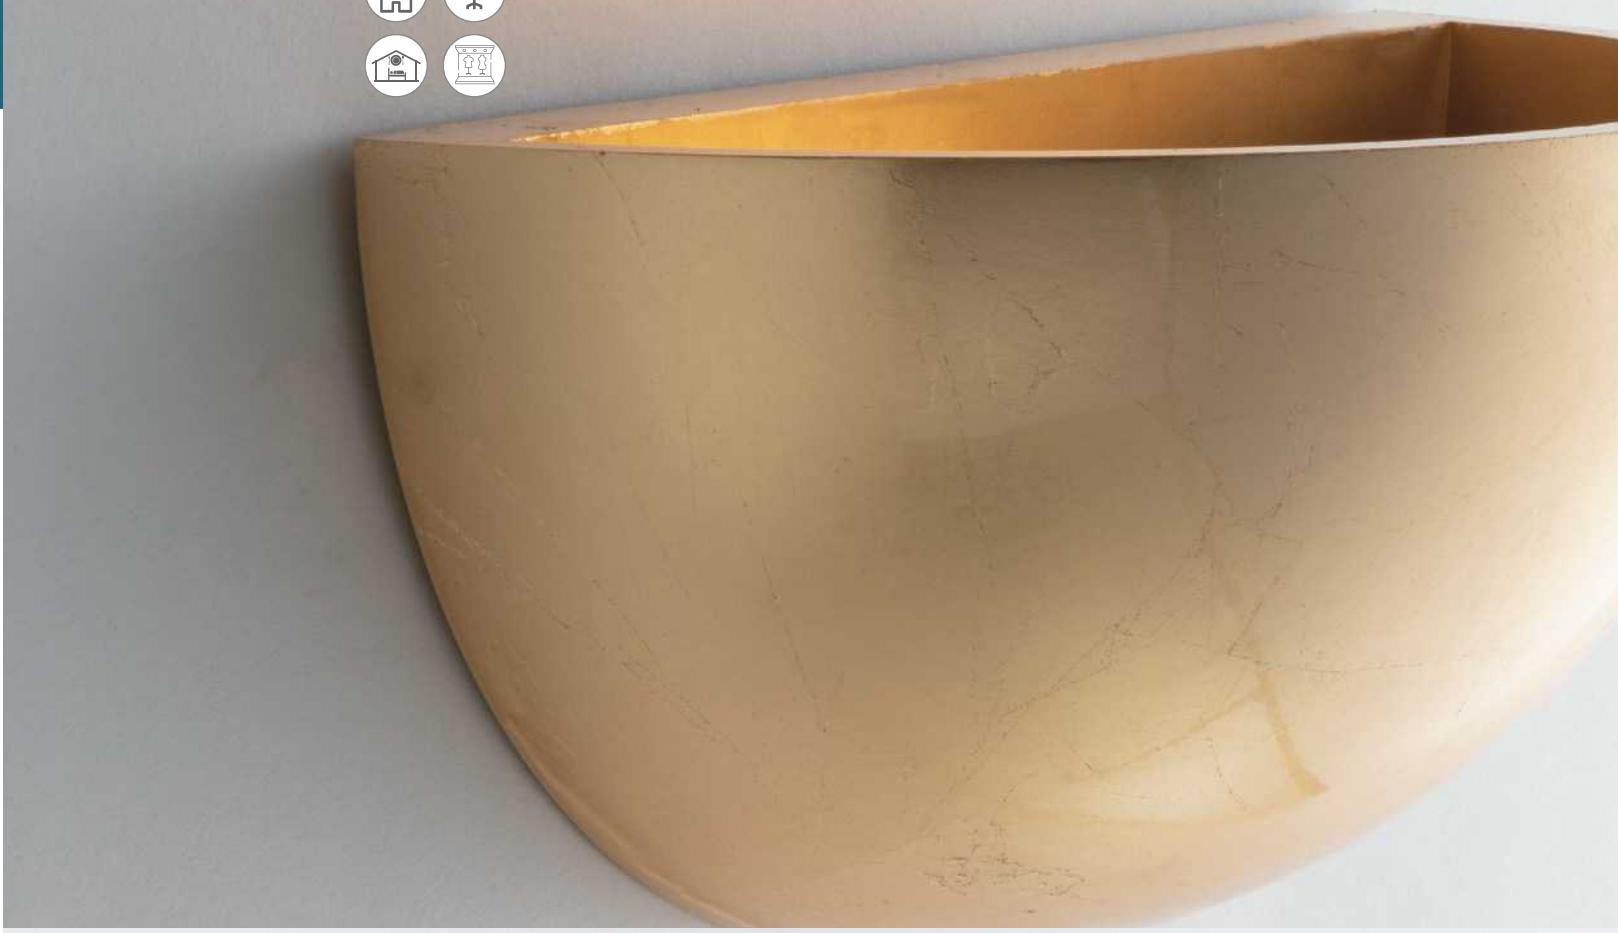I-MORITZ-S-ORO-AP
8031414866458


1XE27 MAX 40W

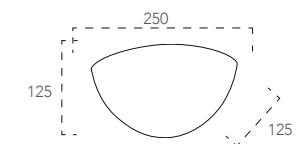Misure - Size
dimensioni in mm - size mmI-MORITZ-S-SIL-AP
8031414866489


1XE27 MAX 40W

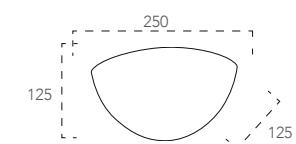Misure - Size
dimensioni in mm - size mmI-MORITZ-S-BG-AP
8031414865338

1XE27 MAX 40W

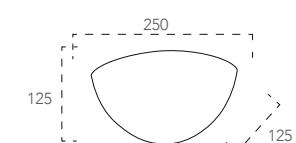Misure - Size
dimensioni in mm - size mmI-MORITZ-S-NOC-AP
8031414865352

1XE27 MAX 40W

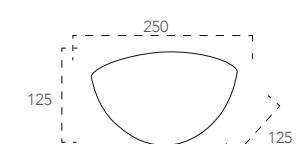Misure - Size
dimensioni in mm - size mm

LIVIGNO

Applique a parete in gesso bianco verniciabile o foglia oro o foglia argento
White gypsum wall lamp paintable gold leaf or silver leaf



G9
Attacco sorgente
Lampholder



Lampadina non inclusa
bulbs not included




I-LIVIGNO-AP
8031414867561

2XG9 MAX 25W



Gesso Verniciabile
Gypsum paintable

Misure - Size
dimensioni in mm - size mm

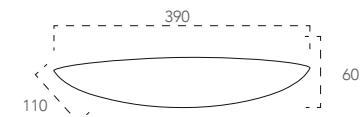

I-LIVIGNO-AP ORO
8031414867578

2XG9 MAX 25W


Misure - Size
dimensioni in mm - size mm



I-LIVIGNO-AP SIL
8031414867585

2XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm

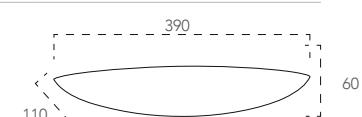

ALMA

Applique a parete in gesso bianco verniciabile o foglia oro o foglia argento

White gypsum wall lamp paintable gold leaf or silver leaf



G9

Attacco sorgente
Lampholder



G9

Lampadina non inclusa
bulbs not included




I-ALMA-AP
8031414866496

2XG9 MAX 25W



Verniciabile
Paintable


Misure - Size
dimensioni in mm - size mm



I-ALMA-AP SIL
8031414867554

2XG9 MAX 25W


Misure - Size
dimensioni in mm - size mm



I-ALMA-AP ORO
8031414867547

2XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm



AILERON

Applique a LED orientabile in alluminio bianco sabbato o bronzo sabbato
Adjustable aluminium LED wall lamp sand white or sand bronze



Orientabile
Adjustable



Sorgente luminosa
Light source

AILERON

Driver
incluso

Sorgente luminosa
LED SMD 10W

Temperatura colore
4000K

Flusso luminoso
700 Lm

Durata e on/off
25.000h - 10.000 on/off

Angolo di luce
↑ 120° + ↓ 120°

CRI
>80

Driver
included

Light source
LED SMD 10W

Colour temperature
4000K

Luminous flux
700 Lm

Lifetime and on/off
25.000h - 10.000 on/off

Beam angle
↑ 120° + ↓ 120°

CRI
>80




LED-W-AILERON BCO
8031414876938




10W

Misure - size
dimensioni in mm - size mm



LED-W-AILERON BRO
8031414876945



Misure - size
dimensioni in mm - size mm

ANTARES

Applique a LED in alluminio cromo o bianco con diffusore in acrilico
Aluminium LED wall lamp white or chrome finish with acrylic diffuser



Sorgente luminosa
Light source

ANTARES

Driver
incluso

Sorgente luminosa

LED SMD 8W

Temperatura colore

3500K

Flusso luminoso

620 Lm

Durata e on/off

25.000h - 10.000 on/off

Angolo di luce

120°

CRI

>80

Driver
included

Light source

LED SMD 8W

Colour temperature

3500K

Luminous flux

620 Lm

Lifetime and on/off

25.000h - 10.000 on/off

Beam angle

120°

CRI

>80




LED-W-ANTARES/8W BCO
8031433091206

8W



Misure - size
dimensioni in mm - size mm

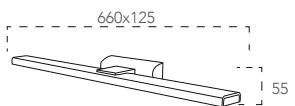


LED-W-ANTARES/8W CR
8031433081207

8W



Misure - size
dimensioni in mm - size mm

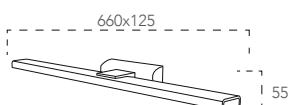



SIGMA

Applique a LED in metallo cromato con diffusore in acrilico

Chrome metal LED wall lamp with acrylic diffuser



Sorgente luminosa
Light source



Orientabile
Adjustable

Driver

incluso
Sorgente luminosa

LED SMD 4W
Light source

Temperatura colore

3500K
Colour temperature

Durata e on/off

25.000h - >10.000 on/off

Angolo di luce

120°
Beam angle

CRI

>80
CRI


CLASSE A+ CE EMC

LED-W-SIGMA/4W

4W - 320 Lm

Misure - size

dimensioni in mm - size mm

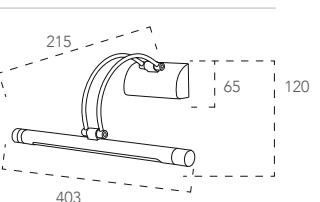

ANDROMEDA

Applique a LED in metallo cromato
Chrome metal LED wall lamp



Sorgente luminosa
Light source



Driver

incluso
Sorgente luminosa

LED SMD 4W
Light source

Temperatura colore

3500K
Colour temperature

Durata e on/off

25.000 h - 10.000 on/off

Angolo di luce

120°
Beam angle

CRI

>80
CRI


CLASSE A+ CE EMC

LED-W-ANDROMEDA/4W

4W - 280 Lm

Misure - size

dimensioni in mm - size mm

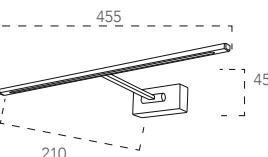

ATLAS

Applique a LED in alluminio bianco goffrato

Aluminium LED wall lamp embossed white



Sorgente luminosa
Light source



Biemission light



Driver

incluso
Sorgente luminosa

LED SMD 6W
Light source

Temperatura colore

3500K
Colour temperature

Durata e on/off

25.000 h - 10.000 on/off

Angolo di luce

↑ 90° + ↓ 90°
Beam angle

CRI

>80
CRI


CLASSE A+ CE EMC

LED-W-ATLAS/6W

6W - 400 Lm

8031433071208

8031433071208



Misure - size

dimensioni in mm - size mm

OMEGA

Applique a LED in alluminio bianco goffrato


Aluminium LED wall lamp embossed white



Sorgente luminosa
Light source



Biemission light

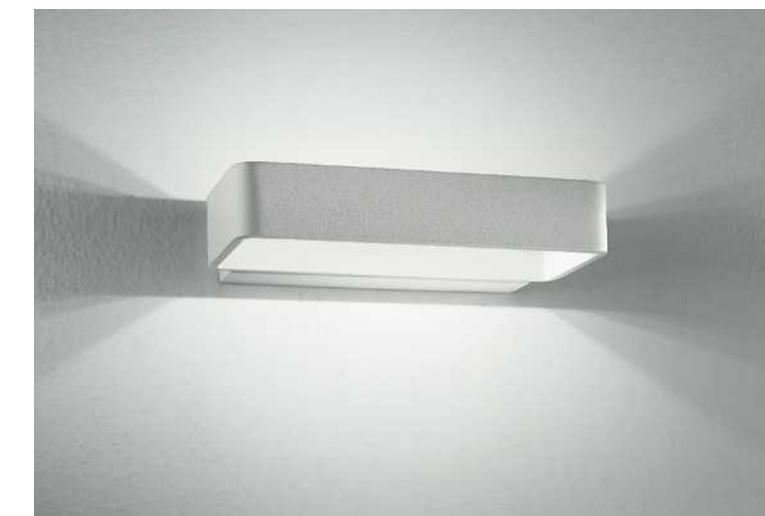

Driver

incluso
Sorgente luminosa

LED SMD 5,5W
Light source

Temperatura colore

4000K
Colour temperature

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

↑ 90° + ↓ 90°
Beam angle

CRI

>80
CRI


CLASSE A+ CE EMC

LED-W-OMEGA BCO

5,5W - 480 Lm

8031414875467

8031414875467



Misure - size


dimensioni in mm - size mm

LAMBDA

Applique a LED in alluminio bianco goffrato
Metal LED wall lamp embossed white



Sorgente luminosa
Light source

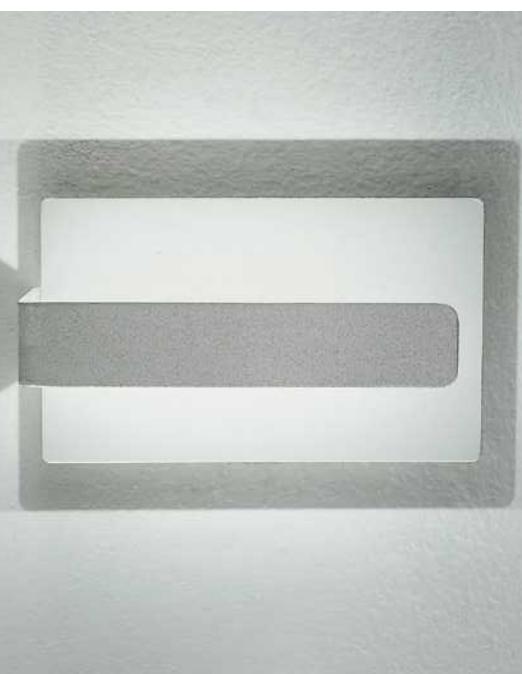

Driver
incluso

Sorgente luminosa
LED SMD 4W

Temperatura colore
3500K

Flusso luminoso

320 Lm

Durata e on/off
25.000 h - >10.000 on/off

Angolo di luce
↑ 90° + ↓ 90°

CRI
>80

Driver
included

Light source
LED SMD 4W

Colour temperature
3500K

Luminous flux

320 Lm

Lifetime and on/off
25.000 h - >10.000 on/off


Beam angle
↑ 90° + ↓ 90°

CRI
>80

LED-W-LAMBDA/4W
8031433001205

4W

Misure - Size
dimensioni in mm - size mm

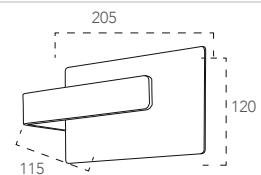

ALCOR

Applique a LED in alluminio bianco goffrato o silver goffrato
Aluminium LED wall lamp embossed white or silver



Sorgente luminosa
Light source



Driver

incluso

Sorgente luminosa

LED SMD 5W

Temperatura colore

3000K

Flusso luminoso

500 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

CRI

>80

Driver

included

Light source

LED SMD 5W

Colour temperature

3000K

Luminous flux

500 Lm

Lifetime on/off

25.000 h - >10.000 on/off

Beam angle

120°


CRI

>80




LED-W-ALCOR/5W BCO
8031440355186

5W

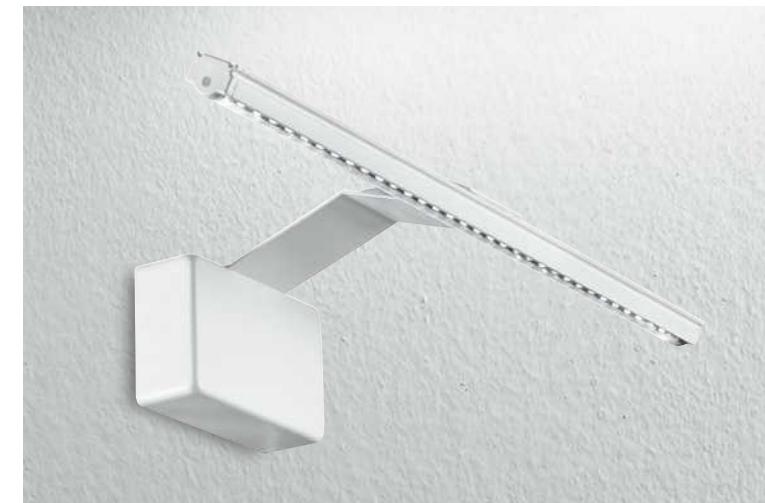

Misure - size
dimensioni in mm - size mm

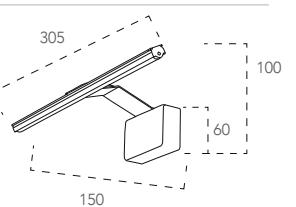


LED-W-ALCOR/5W SIL
8031440355148

5W



Misure - size
dimensioni in mm - size mm

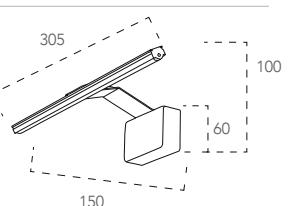

GRADO

Applique a LED in alluminio bianco goffrato
Aluminium LED wall lamp embossed white



LED
SMD

Sorgente luminosa
Light source

Driver
incluso

Sorgente luminosa
LED SMD 10W

Temperatura colore
4000K

Flusso luminoso
800 Lm

Durata e on/off
25.000 h - >15.000 on/off

Angolo di luce
120°

CRI
>80

Driver
included

Light source
LED SMD 10W

Colour temperature
4000K

Luminous flux
800 Lm

Lifetime and on/off
25.000 h - >15.000 on/off


Beam angle
120°

CRI
>80

LED-W-GRADO
8031440361194

10W

Misure - Size
dimensioni in mm - size mm

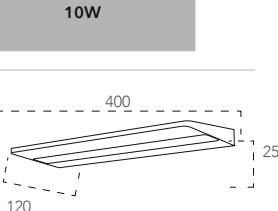

KITE

Applique a LED in alluminio bianco o nero
laccato lucido
Aluminium LED wall lamp glossy lacquered
black or white



LED
SMD

Sorgente luminosa
Light source



LED SMD 2x3W

Driver
incluso

Sorgente luminosa
LED SMD 2x3W

Temperatura colore
4000K

Flusso luminoso
540 Lm

Durata e on/off
25.000 h - 15.000 on/off

Angolo di luce
120° < + 120°>

CRI
>80

Driver
included

Light source
LED SMD 2x3W

Colour temperature
4000K

Luminous flux
540 Lm

Lifetime and on/off
25.000 h - 15.000 on/off

Beam angle
120° < + 120°>

CRI
>80




LED-W-KITE NERO
8031440361187

2X3W




Misure - Size
dimensioni in mm - size mm

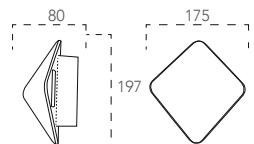


LED-W-KITE BCO
8031440361170

2X3W

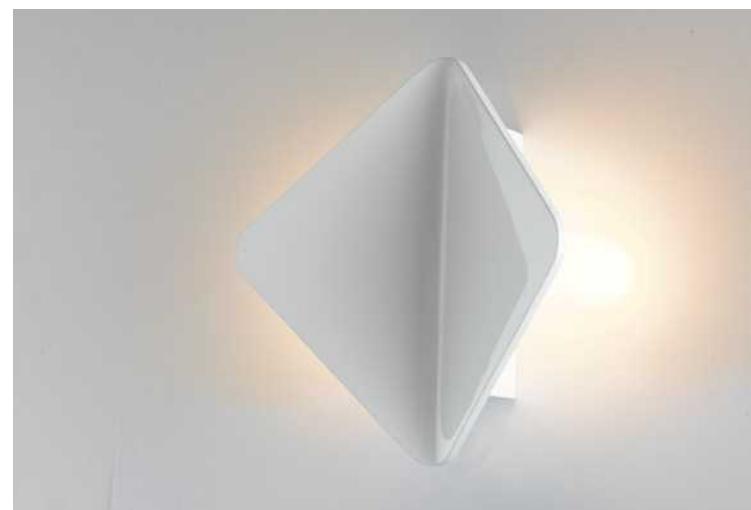

Misure - Size
dimensioni in mm - size mm

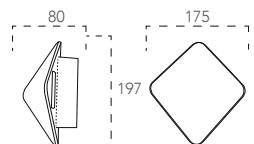

MUSTANG

Applique a LED in alluminio bianco goffrato
Aluminium LED wall lamp embossed white



Sorgente luminosa
Light source

MUSTANG



Driver
incluso

Sorgente luminosa
LED SMD 8W - 15W

Temperatura colore
4000K

Flusso luminoso
640 Lm - 1200 Lm

Durata e on/off
25.000 h - 15.000 on/off

Angolo di luce
120°

CRI
>80

Driver
included

Light source
LED SMD 8W - 15W

Colour temperature
4000K

Luminous flux
640 Lm - 1200 Lm

Lifetime and on/off
25.000 h - 15.000 on/off

Beam angle
120°

CRI
>80




LED-W-MUSTANG-200
8031440361156

8W - 640 Lm



Misure - Size
dimensioni in mm - size mm




LED-W-MUSTANG-600
8031440361149

15W - 1200 Lm



Misure - Size
dimensioni in mm - size mm

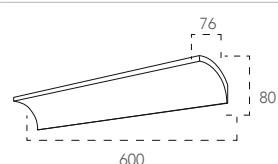

TWILIGHT


Applique LED in alluminio bianco goffrato con diffusore mobile

Embossed white aluminium wall lamp with adjustable diffuser

Sorgente luminosa
Light source

350°


Adjustable

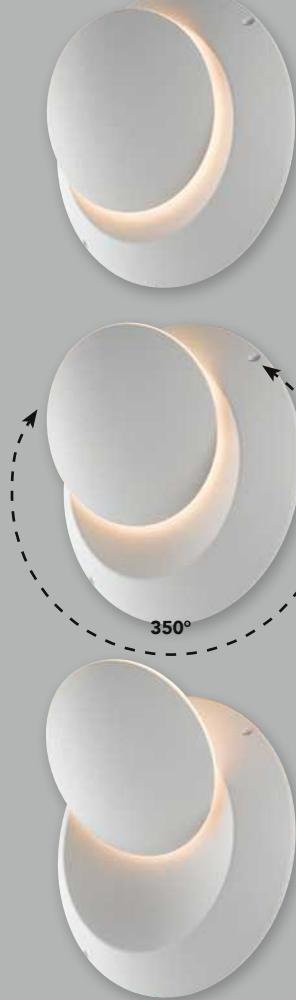

Driver	Driver
incluso	incluso
Sorgente luminosa	Light source
LED SMD 4W	LED SMD 4W
Temperatura colore	Colour temperature
4000K	4000K
Flusso luminoso	Luminous flux
288 Lm	288 Lm
Durata e on/off	Lifetime and on/off
25.000 h - 15.000 on/off	25.000 h - 15.000 on/off
Angolo di luce	Beam angle
107°	107°
CRI	CRI
>80	>80

LED-W-TWILIGHT
8031440361088

4W

Misure - Size
dimensioni in mm - size mm

CLASSE A CE EMC

OMNIA



Applique LED dimmerabile in alluminio, bianco goffrato orientabile

Dimmable aluminum adjustable LED wall lamp, in embossed white

Sorgente luminosa
Light source

320°


Adjustable

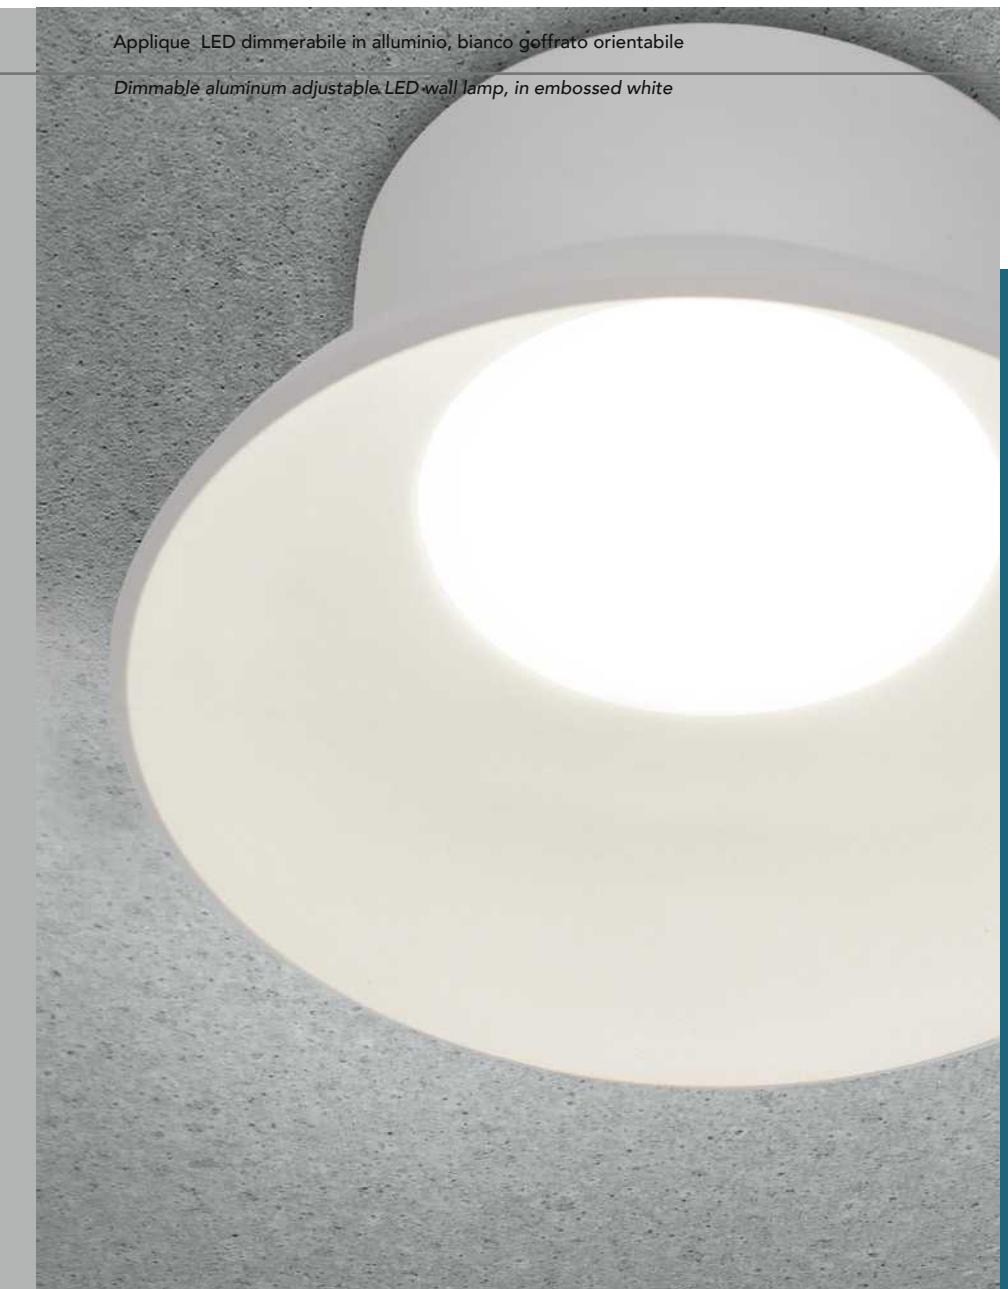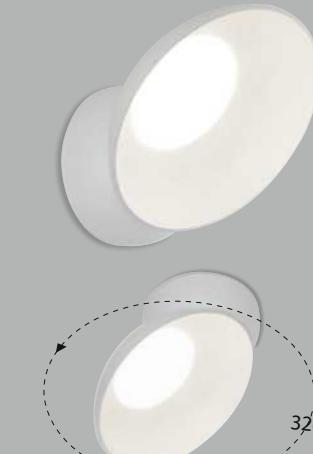Dimmerabile
Dimmable

Driver	Driver
incluso	incluso
Sorgente luminosa	Light source
LED SMD 15W	LED SMD 15W
Temperatura colore	Colour temperature
3000K	3000K
Flusso luminoso	Luminous flux
1300 Lm	1300 Lm
Durata e on/off	Lifetime and on/off
25.000 h - 10.000 on/off	25.000 h - 10.000 on/off
Angolo di luce	Beam angle
107°	107°
CRI	CRI
>80	>80

LED-W-OMNIA/15W
8031440351423

15W

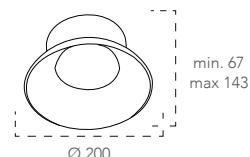Misure - Size
dimensioni in mm - size mm

CLASSE A CE EMC

BOREA



Plafoniera con ventilatore

Materiale
Acrilico PMMA
Colore
Bianco effetto cielo stellato bordo diamantato
Sorgente luminosa
LED SMD integrato 40W
Driver
incluso
Temperatura colore
 CCT
Punti luce
1
Flusso
3600 Lm
Durata e on/off
20.000 h ~ >15.00 on/off
Angolo di luce
120°
CRI
>80
Potenza ventilatore
AC 34W - 900rpm 1050rpm 1200rpm
Volume aria
20 m³ min.
Livello sonoro
48 dB
Materiale ventilatore
7 lame bianche in termoplastica
Caratteristiche ventilatore
7 lame ultra silenziose con rotazione unilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria

Ceiling lamp with fan

Material
PMMA acrylic
Colour
White colour with starry sky effect diamod edge
Light source
40W Built-in LED
Driver
included
Color temperature
 CCT
Light spot
1
Luminous flux
3600 Lm
Lifetime and on/off
20.000 h ~ >15.00 on/off
Beam angle
120°
CRI
>80
Fan power
AC 34W - 900rpm 1050rpm 1200rpm
Air volume
20 m³ min.
Sound level
48 dB
Fan material
7 white thermoplastic blades
Fan characteristics
7 ultra-silent blades unidirectional rotation rotating outer ring for greater air diffusion

SKYRON




Plafoniera con ventilatore

Materiale
Acrilico PMMA
Colore
Bianco effetto cielo stellato
Sorgente luminosa
LED SMD integrato 40W
Driver
incluso
Temperatura colore
 CCT
Punti luce
1
Flusso
3600 Lm
Durata e on/off
20.000 h ~ >15.00 on/off
Angolo di luce
120°
CRI
>80
Potenza ventilatore
AC 34W - 900rpm 1050rpm 1200rpm
Volume aria
20 m³ min.
Livello sonoro
48 dB
Materiale ventilatore
7 lame bianche in termoplastica
Caratteristiche ventilatore
7 lame ultra silenziose con rotazione unilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria



LED-BOREA-INT
8031414873692

Misure
dimensioni in mm

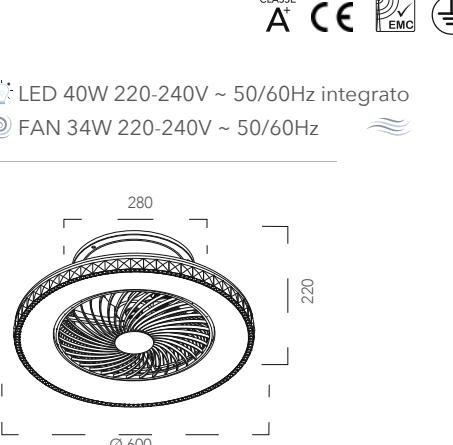


CLASSE
A CE EMC






LED-SKYRON-INT
8031414873678

Misure
dimensioni in mm

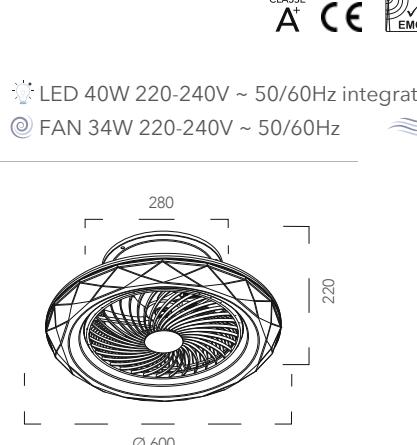

CLASSE
A CE EMC

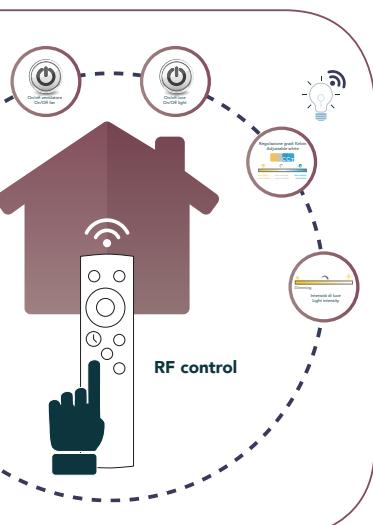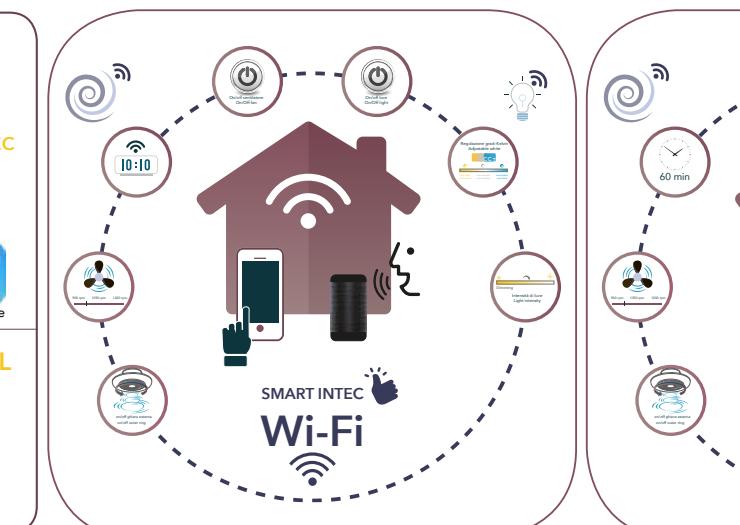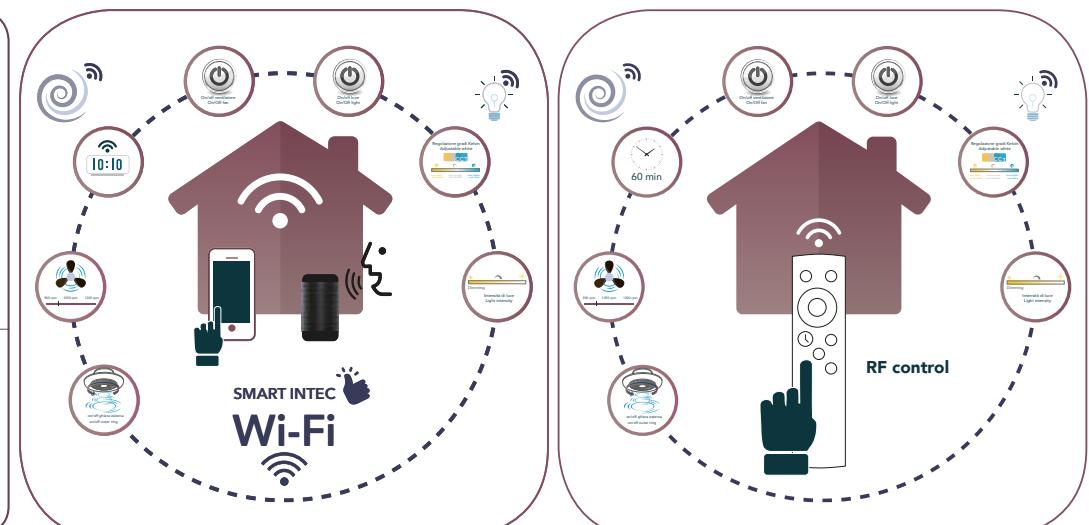

ALISEO



SMART INTEC
Wi-Fi

Plafoniera con ventilatore

Materiale
Acrilico PMMA
Colore
Bianco
Sorgente luminosa
LED SMD integrato 40W
Driver
incluso
Temperatura colore

CCT

Punti luce

1

Flusso

3600 Lm

Durata e on/off

20.000 h ~ >15.00 on/off

Angolo di luce

120°

CRI

>80

Potenza ventilatore

AC 34W - 900rpm 1050rpm 1200rpm

Volume aria

20 m³ min.

Livello sonoro

48 dB

Materiale ventilatore

7 lame bianche in termoplastica

Caratteristiche ventilatore

7 lame ultra silenziose con rotazione unilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria

Ceiling lamp with fan

Material
PMMA acrylic
Colour
White
Light source

40W Built-in LED

Driver
included

Color temperature

CCT

Light spot

1

Luminous flux

3600 Lm

Lifetime and on/off

20.000 h ~ >15.00 on/off

Beam angle

120°

CRI

>80

Fan power

AC 34W - 900rpm 1050rpm 1200rpm

Air volume

20 m³ min.

Sound level

48 dB

Fan material

7 white thermoplastic blades

Fan characteristics

7 ultra-silent blades unidirectional rotation
rotating outer ring for greater air diffusion

FOEHN



SMART INTEC
Wi-Fi

Plafoniera con ventilatore

Materiale
Acrilico PMMA bianco effetto cielo stellato
Colore
Struttura grigio diffusore bianco
Sorgente luminosa

LED SMD integrato 40W

Driver
included

Color temperature

CCT

Punti luce

1

Flusso

3600 Lm

Durata e on/off

20.000 h ~ >15.00 on/off

Angolo di luce

120°

CRI

>80

Potenza ventilatore

AC 34W - 900rpm 1050rpm 1200rpm

Volume aria

20 m³ min.

Livello sonoro

48 dB

Materiale ventilatore

7 lame trasparenti in termoplastica

Caratteristiche ventilatore

7 lame ultra silenziose con rotazione unilaterale

Ceiling lamp with fan

Material
PMMA acrylic white colour with starry sky effect
Colour
Grey structure white diffuser
Light source

40W Built-in LED

Driver
included

Color temperature

CCT

Light spot

1

Luminous flux

3600 Lm

Lifetime and on/off

20.000 h ~ >15.00 on/off

Beam angle

120°

CRI

>80

Fan power

AC 34W - 900rpm 1050rpm 1200rpm

Air volume

20 m³ min.

Sound level

48 dB

Fan material

7 transparent thermoplastic blades

Fan characteristics

7 ultra-silent blades unidirectional rotation

MOON

Plafoniera a LED in acrilico effetto cielo stellato
LED acrylic ceiling lamp with diffuser starry sky effect



Sorgente luminosa
Light source



Materiale	Material
Acrilico PMMA	PMMA acrylic
Colore	Colour
Bianco effetto cielo stellato	White with starry sky effect
Driver	Driver
integrato	Built-in driver
Sorgente luminosa	Light source
LED SMD 18W- 24W	LED SMD 18W- 24W
Temperatura colore	Color temperature
4000K	4000K
Durata e on/off	Lifetime and on/off
25.000 h - 15.000 on/off	25.000 h - 15.000 on/off
Angolo di luce	Beam angle
120°	120°
CRI	CRI
>80	>80


CLASSE A+ CE EMC



I-MOON-R30
8031414862672

18W- 1800 Lm


Misure - size
dimensioni in mm - size mm



I-MOON-R40
8031414862696

24W - 2400 Lm



Misure - size
dimensioni in mm - size mm



I-MOON-Q28
8031414863648

18W- 1800 Lm


Misure - size
dimensioni in mm - size mm

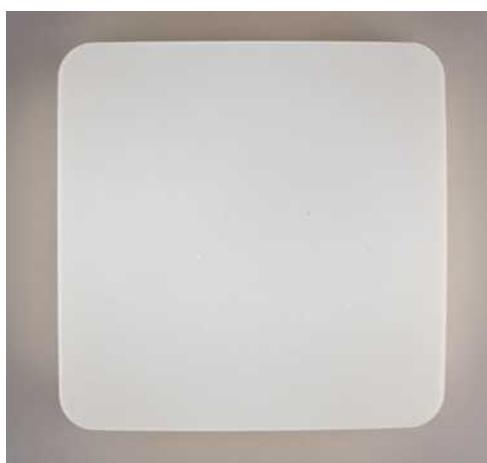

I-MOON-Q38
8031414863655

24W - 2400 Lm

Misure - size
dimensioni in mm - size mm




MOON

Plafoniera a LED in acrilico effetto cielo stellato

LED acrylic ceiling lamp with starry sky effect



SMART INTEC
Wi-Fi

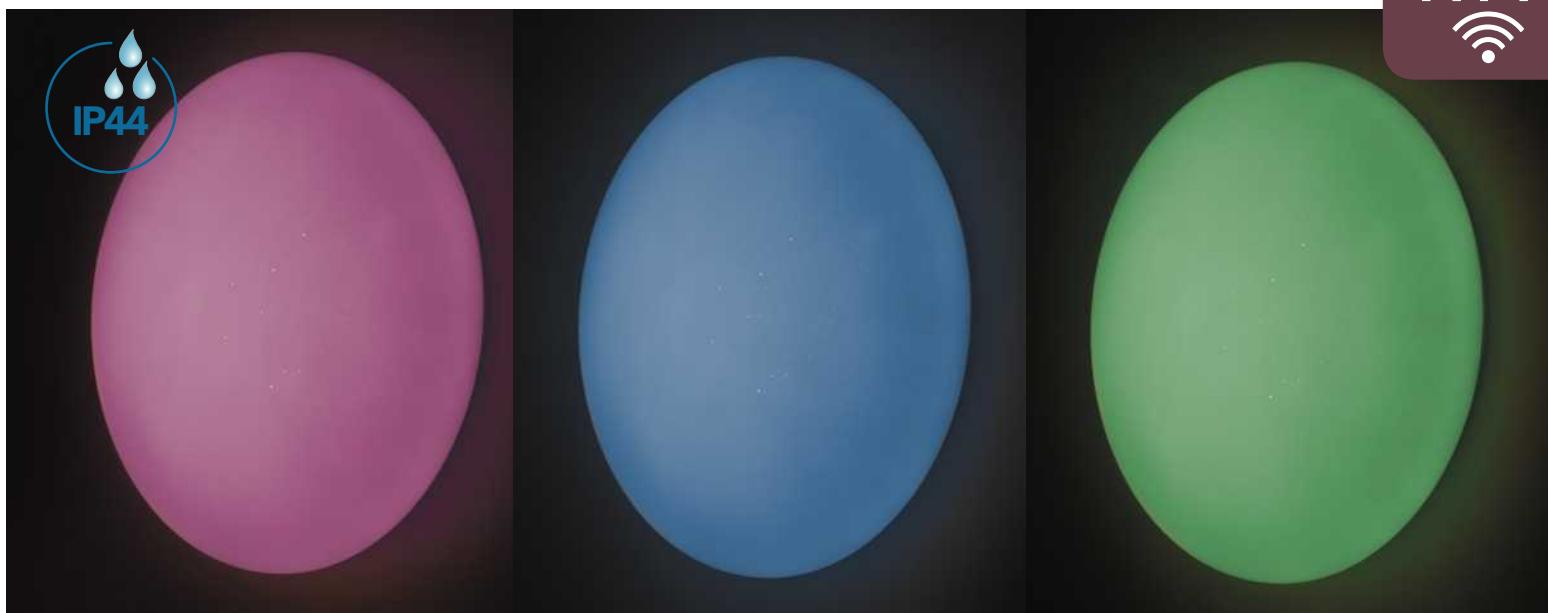

Materiale

Acrilico PMMA

Colore

Bianco effetto cielo stellato

Driver

integrato

Sorgente luminosa

LED SMD 24W

Temperatura colore

RGB + 4000K



Durata e on/off

25.000 h - 15.000 on/off

Angolo di luce

120°

CRI

>80

Material

PMMA acrylic

Colour

White with starry sky effect

Driver

Built-in driver

Light source

LED SMD 24W

Color temperature

RGB + 4000K



Lifetime and on/off

25.000 h - 15.000 on/off

Beam angle

120°


CRI

>80

I-MOON-R40-INT
8031414863488

24W - 2000 LM

Misure dimensioni in mm



CONTROL SYSTEM EASY INSTALLATION



VOICE CONTROL




RF
CONTROL
SYSTEM

incluso
included

RAIN

Plafoniera a LED con diffusore in acrilico cornice silver bordo trasparente

LED ceiling lamp with acrylic diffusor silver frame and transparent edge

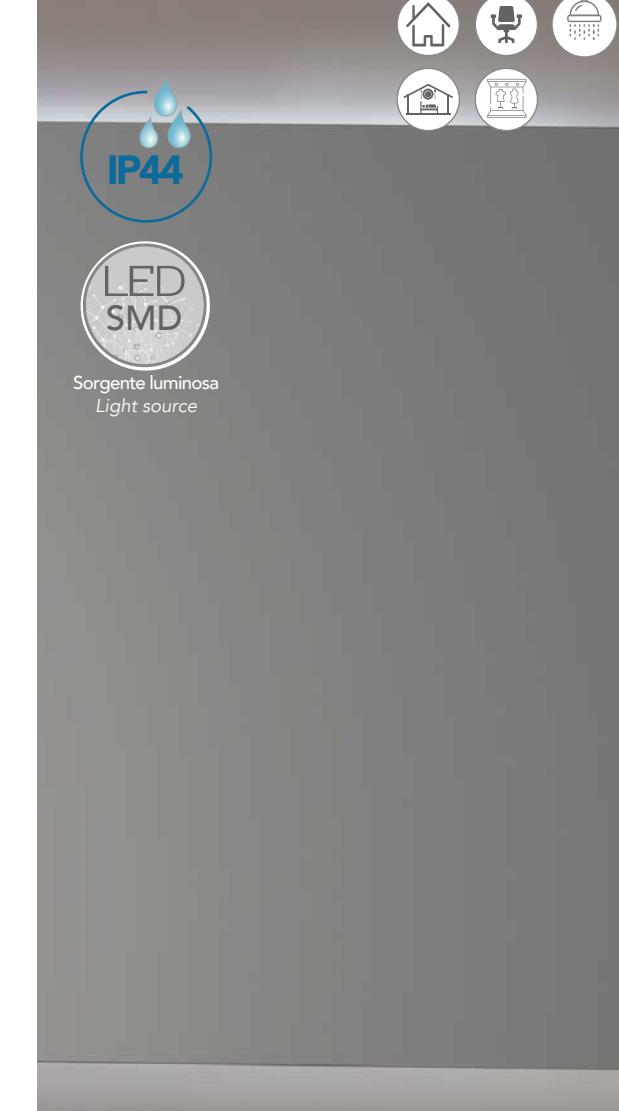

Driver

integrato

Sorgente luminosa

LED SMD 12W

Temperatura colore

4000K

Flusso luminoso

1160 Lm

Durata e on/off

25.000 h - 15.000 on/off

Angolo di luce

120°

CRI

>80

I-RAIN-PL33
8031440361866

Driver

built-in driver

Light source

LED SMD 12W

Color temperature

4000K

Luminous flux

1160 Lm

Lifetime and on/off

25.000 h - 15.000 on/off

Beam angle


120°

CRI

>80

12W

Misure - size dimensioni in mm - size mm

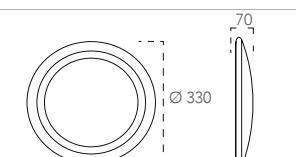

DOMO

Plafoniera in alluminio LED integrato

Aluminium LED ceiling lamp



Sorgente luminosa
Light source

DOMO

Materiale

Alluminio, diffusore in acrilico

Colore

Cromo

Sorgente luminosa

LED SMD 24W

Driver

incluso

Temperatura colore

4000K

Flusso luminoso

2200 Lm

Durata e on/off

30.000 h - 15.000 on/off

Angolo di luce

120°

CRI

>80

Material

Aluminium, acrylic diffuser

Colour

Chrome

Light source

LED SMD 24W

Driver

included

Color temperature

4000K

Luminous flux

2200 Lm

Lifetime and on/off

30.000 h - 15.000 on/off

Beam angle

120°

CRI

>80




LED-DOMO-Q24
8031414876235

24W 2200LM




Misure - size
dimensioni in mm - size mm

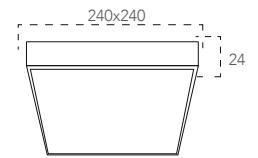

LED-DOMO-R24
8031414876228

24W 2200LM

Misure - size
dimensioni in mm - size mm

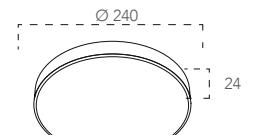

BLASTER

Applique a LED con diffusore in policarbonato struttura cromata

LED wall lamp with polycarbonate diffuser and chrome structure



BLASTER

Materiale

Alluminio, diffusore in PC

Material

Aluminium, PC diffuser

Colore

Struttura cromata diffusore bianco

Colour

Chrome structure white diffuser

Sorgente luminosa

LED SMD 8W - 15W

Light source

LED SMD 8W - 15W

Driver

Integrato

Driver

Built-in driver

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

1200 Lm - 640 Lm

Luminous flux

1200 Lm - 640 Lm

UGR

<19

UGR

<19

Durata e on/off

30.000 h - 15.000 on/off

Lifetime and on/off

30.000 h - 15.000 on/off

Angolo di luce

133°

Beam angle


133°

CRI


>80

CRI

>80

LED-BLASTER-60
803141486652615W - 1200 Lm
UGR<19Misure - Size
dimensioni in mm -
size mmLED-BLASTER-PLUG
80314148665198W - 640 Lm
UGR<19

plug max 2000W

Misure - Size
dimensioni in mm -
size mm

LANCER



Applique a LED in alluminio bianco o nero goffrato
Aluminium LED wall lamp embossed white or black finish



Sorgente luminosa
Light source


LANCER

Materiale	Alluminio, diffusore in PC	Material	Aluminium, PC diffuser
Colore	Bianco goffrato - nero goffrato	Colour	Embossed white - embossed black
Sorgente luminosa	LED SMD 17W	Light source	LED SMD 17W
Driver	Integrato	Driver	Built-in driver
Temperatura colore	3000K - 4000K	Color temperature	3000K - 4000K
Flusso luminoso	1360 Lm	Luminous flux	1360 Lm
Durata e on/off	25.000 h - 10.000 on/off	Lifetime and on/off	25.000 h - 10.000 on/off
Angolo di luce	120°	Beam angle	120°
CRI	>80	CRI	>80



LED-W-LANCER NERO
8031440361217

17W




LED-W-LANCER-C BCO
8031414876679

17W

LED-W-LANCER BCO
8031440361200

17W

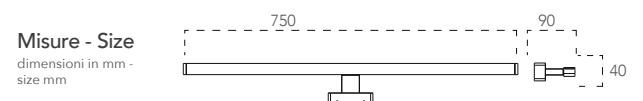



SACS

Applique a LED in termoplastica e diffusore in acrilico
Thermoplastic LED wall lamp with acrylic diffuser



Sorgente luminosa
Light source



Sorgente luminosa
Light source



Driver

integrato

Sorgente luminosa

LED SMD 4,4W - 4,5W

Temperatura colore

4000K

Flusso luminoso

198 Lm - 200 Lm

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

120°

CRI

>80

Driver

built-in driver

Light source

LED SMD 4,4W - 4,5W

Colour temperature

4000K

Luminous flux

198 Lm - 200 Lm

Lifetime on/off

25.000 h - >15.000 on/off

Beam angle

120°

CRI

>80

RIVA

Applique a LED in alluminio e diffusore in acrilico
Aluminium LED wall lamp with acrylic diffuser



Sorgente luminosa
Light source



Sorgente luminosa
Light source

Driver

integrato

Sorgente luminosa

LED SMD 8W

Temperatura colore

4000K

Flusso luminoso

740 Lm

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

120°

CRI

>80

Driver

built-in driver

Light source

LED SMD 8W

Colour temperature

4000K

Luminous flux

740 Lm

Lifetime on/off

25.000 h - >15.000 on/off

Beam angle

120°

CRI

>80




SPOT-B-RIVA

8W - 740 Lm



Fissaggio su cornice
Frame fixing

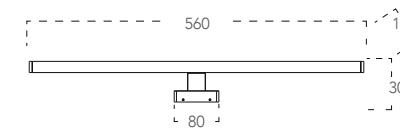

Driver

integrato

Driver

built-in driver

Sorgente luminosa

LED SMD 2,2W

Sorgente luminosa

LED SMD 2,2W

Temperatura colore

4000K

Colour temperature

4000K

Flusso luminoso

430 Lm

Luminous flux

430 Lm

Durata e on/off

25.000 h - >15.000 on/off

Lifetime on/off

25.000 h - >15.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80


CRI

>80




SPOT-B-CRUISE

5,2W - 430 Lm




Fissaggio su cornice
Frame fixing

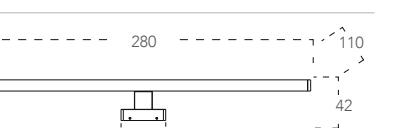

SPOT-B-SACS


4,4W - 198 Lm



Fissaggio su cornice
Frame fixing


Misure - Size

dimensioni in mm - size mm

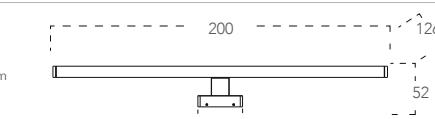


SPOT-B-SACS-XL

4,5W - 200 Lm



Fissaggio su cornice
Frame fixing

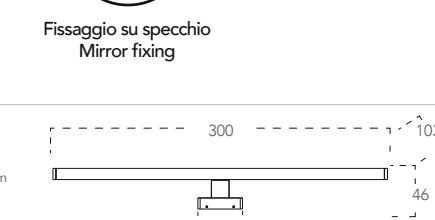

CRUISE

Applique a LED in termoplastica e diffusore in acrilico
Thermoplastic LED wall lamp with acrylic diffuser



Sorgente luminosa
Light source



Sorgente luminosa
Light source



SCARAB



Applique a LED in alluminio e diffusore in acrilico, fissaggio su cornice
Aluminium LED wall lamp with acrylic diffuser, frame fixing



Sorgente luminosa
Light source



Driver
incluso

Driver
included

Sorgente luminosa

Light source

LED SMD 3W

LED SMD 3W

Temperatura colore

Colour temperature

4000K

4000K

Flusso luminoso

Luminous flux

280 Lm

280 Lm

Durata e on/off

Lifetime on/off

25.000 h - >15.000 on/off

25.000 h - >15.000 on/off

Angolo di luce

Beam angle

120°

120°

CRI

CRI


>80

>80

CLASSE A CE EMC




SPOT-B-SCARAB
8031440363440



Fissaggio su cornice
Frame fixing

Misure - Size
dimensioni in mm - size mm

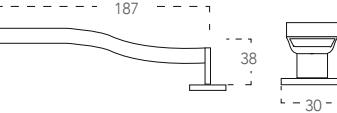

WALLY



Applique a LED in alluminio e diffusore in acrilico, fissaggio su cornice e su specchio
Aluminium LED wall lamp with acrylic diffuser, frame and mirror fixing



Sorgente luminosa
Light source



Driver
integrato

Driver
built-in driver

Sorgente luminosa

Light source

LED SMD 8W

LED SMD 8W

Temperatura colore

Colour temperature

4000K

4000K

Flusso luminoso

Luminous flux

650 Lm

650 Lm

Durata e on/off

Lifetime on/off

25.000 h - >15.000 on/off

25.000 h - >15.000 on/off

Angolo di luce

Beam angle

120°

120°

CRI


CRI

>80

CLASSE A CE EMC




SPOT-B-WALLY
8031440363471



Fissaggio su cornice
Frame fixing

Misure - Size
dimensioni in mm - size mm

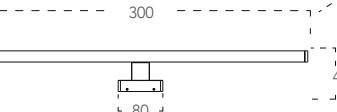

AQA



Applique a LED in termoplastica e diffusore in acrilico

Thermoplastic LED wall lamp with acrylic diffuser



Sorgente luminosa
Light source



Fissaggio su cornice
Frame fixing




Fissaggio su specchio
Mirror fixing

SPOT-B-AQA
8031414877027

8W - 600 Lm

Misure - Size
dimensioni in mm - size mm

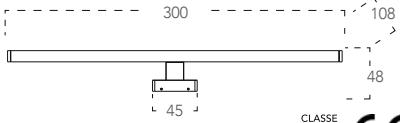

CLASSE A CE EMC



ZEPHYR



Applique a LED in termoplastica e diffusore in acrilico
Thermoplastic LED wall lamp with acrylic diffuser



Sorgente luminosa
Light source



IP44

Driver
integrato

Driver
built-in driver

Sorgente luminosa

Light source

LED SMD 4W - 2x4W

LED SMD 4W - 2x4W

Temperatura colore

Colour temperature

4000K

4000K

Flusso luminoso

Luminous flux

350 Lm - 700 Lm

350 Lm - 700 Lm

Durata e on/off

Lifetime on/off

25.000 h - >10.000 on/off

25.000 h - >10.000 on/off

Angolo di luce

Beam angle

120°

120°

CRI

CRI

>80

>80




LED-W-ZEPHYR-1
8031414864973

4W - 350 Lm



Misure - Size
dimensioni in mm -
size mm




LED-W-ZEPHYR-2
8031414864942

2X4W - 700 Lm



Misure - Size
dimensioni in mm -
size mm



ENDY



Applique da specchio in metallo finitura nickel con diffusore in vetro bianco satinato
Mirror lamp in metal nickel finish with satin white glass shade



Attacco sorgente
Light source



IP23


SPOT-B-ENDY
8031431941190

1XE14 MAX 40W

Lampadina non inclusa
Light bulb not included



Misure - Size
dimensioni in mm - size mm



JOY



Applique da specchio in metallo finitura nickel con diffusore in vetro bianco satinato
Mirror lamp in metal nickel finish with satin white glass shade



Attacco sorgente
Light source



IP23


SPOT-B-JOY
8031431961198

2XE14 MAX 40W

Lampadina non inclusa
Light bulb not included



Misure - Size
dimensioni in mm - size mm



IP



CE

245



IP



CE

245

ROBY

Applique da specchio in metallo cromato con diffusore in vetro bianco satinato

Mirror lamp in chrome metal with satin white glass shade



Attacco sorgente
Light source




IP23

SPOT-B-ROBY-CP
8031440312349

2XG9 MAX 28W


Lampadina non inclusa
Light bulb not included

fissaggio su specchio - mirror fixing



Fissaggio su specchio
Mirror fixing

Misure - Size
dimensioni in mm - size mm

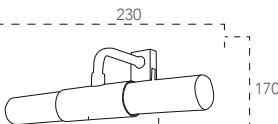

DADO

Applique da specchio in metallo cromato con diffusore in vetro

Mirror lamp in chrome metal with glass shade



Attacco sorgente
Light source



IP23



Fissaggio su specchio
Mirror fixing




SPOT-B-DADO
8031431931191

1XG9 MAX 28W

Lampadina non inclusa
Light bulb not included

fissaggio su specchio - mirror fixing

Misure - Size
dimensioni in mm - size mm



GAIA

Applique da specchio in metallo finitura nickel

Mirror lamp in metal nickel finish



Attacco sorgente
Light source



Fissaggio su specchio
Mirror fixing




SPOT-B-GAIA
8031431951199

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



F1

Applique metallo flessibile cromo con diffusore in vetro bianco satinato
Flexible metal wall lamp chrome with satin white glass diffuser



G9

Attacco sorgente
Light source



IP21

Q1

Applique metallo cromo con diffusore in vetro satinato
Chrome metal wall lamp with satin glass diffuser



G9

Attacco sorgente
Light source



IP21




SPOT-F1
8031414076956

1XG9 MAX 28W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm




SPOT-Q1
8031414076932

2XG9 MAX 28W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



ZERO

Spot in metallo con punti luce orientabili, finitura nera o bianca matto
Metal adjustable spot light matt black or matt white finish



Lampadina non inclusa
Light bulb not included



GU10
Attacco sorgente
Lampholder



Orientabile
Adjustable




SPOT-ZERO-1 NER
8031414866915

1XGU10 MAX 35W

SPOT-ZERO-1 BCO
8031414866878

1XGU10 MAX 35W

Misure - size
dimensioni in mm - size mm




SPOT-ZERO-2 NER
8031414866922

2XGU10 MAX 35W

SPOT-ZERO-2 BCO
8031414866885

2XGU10 MAX 35W

Misure - size
dimensioni in mm - size mm




SPOT-ZERO-PL3 NER
8031414866908

3XGU10 MAX 35W

SPOT-ZERO-PL3 BCO
8031414866861

3XGU10 MAX 35W

Misure - size
dimensioni in mm - size mm




SPOT-ZERO-4 NER
8031414866892

4XGU10 MAX 35W

SPOT-ZERO-4 BCO
8031414866854

4XGU10 MAX 35W

Misure - size
dimensioni in mm - size mm

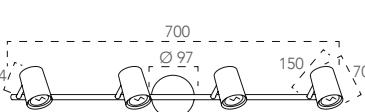

PUNTO



Lampadina non
inclusa
Light bulb not
included



Attacco sorgente
Lampholder



Orientabile
Adjustable



Spot in metallo con punti luce orientabili, finitura nera o bianca matto

Metal adjustable spot light matt black or matt white finish




SPOT-PUNTO-1 NER
8031414867011

1XE27 MAX 40W

SPOT-PUNTO-1 BCO
8031414866830

1XE27 MAX 40W

Misure - size
dimensioni in mm - size mm




SPOT-PUNTO-2 NER
8031414867028

2XE27 MAX 40W

SPOT-PUNTO-2 BCO
8031414866847

2XE27 MAX 40W

Misure - size
dimensioni in mm - size mm

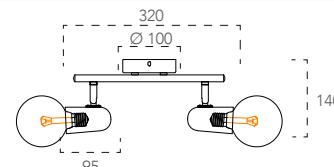


SPOT-PUNTO-PL3 NER
8031414867004

3XE27 MAX 40W

SPOT-PUNTO-PL3 BCO
8031414867042

3XE27 MAX 40W

Misure - size
dimensioni in mm - size mm

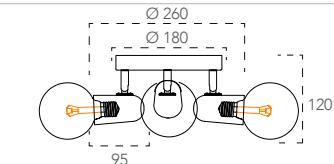


SPOT-PUNTO-4 NER
8031414866991

4XE27 MAX 40W

SPOT-PUNTO-4 BCO
8031414867035

4XE27 MAX 40W

Misure - size
dimensioni in mm - size mm

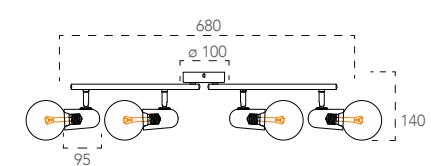

TECHNO



Spot in metallo con punti luce orientabili, finitura nera o bianca matto
Metal adjustable spot light matt black or matt white finish



GU10
Attacco sorgente
Lamp holder




Orientabile
Adjustable

Lampadina LED SMD inclusa
LED SMD light bulb included

Classe	Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off	Durata
A+	☒	5W	80	400	100°	4000	>10.000	25000h

SPOT-TECHNO-1 NER
8031414864652


1XGU10 5W LED



SPOT-TECHNO-1 BCO
8031414864638

1XGU10 5W LED

Misure - size
dimensioni in mm - size mm




SPOT-TECHNO-2 NER
8031414864669

2XGU10 5W LED

SPOT-TECHNO-2 BCO
8031414864645

2XGU10 5W LED

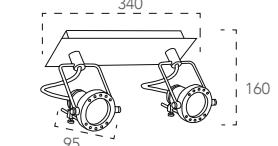



SPOT-TECHNO-3 NER
8031414864539

3XGU10 5W LED

SPOT-TECHNO-3 BCO
8031414864515

3XGU10 5W LED

Misure - size
dimensioni in mm - size mm

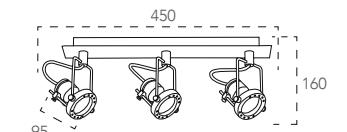


SPOT-TECHNO-PL4 NER
8031414864546

4XGU10 5W LED

SPOT-TECHNO-PL4 BCO
8031414864522

4XGU10 5W LED


Misure - size
dimensioni in mm - size mm

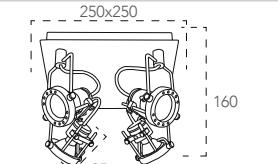



Spot in metallo con punti luce orientabili, finitura nickel spazzolato

Metal adjustable spot light brushed nickel finish

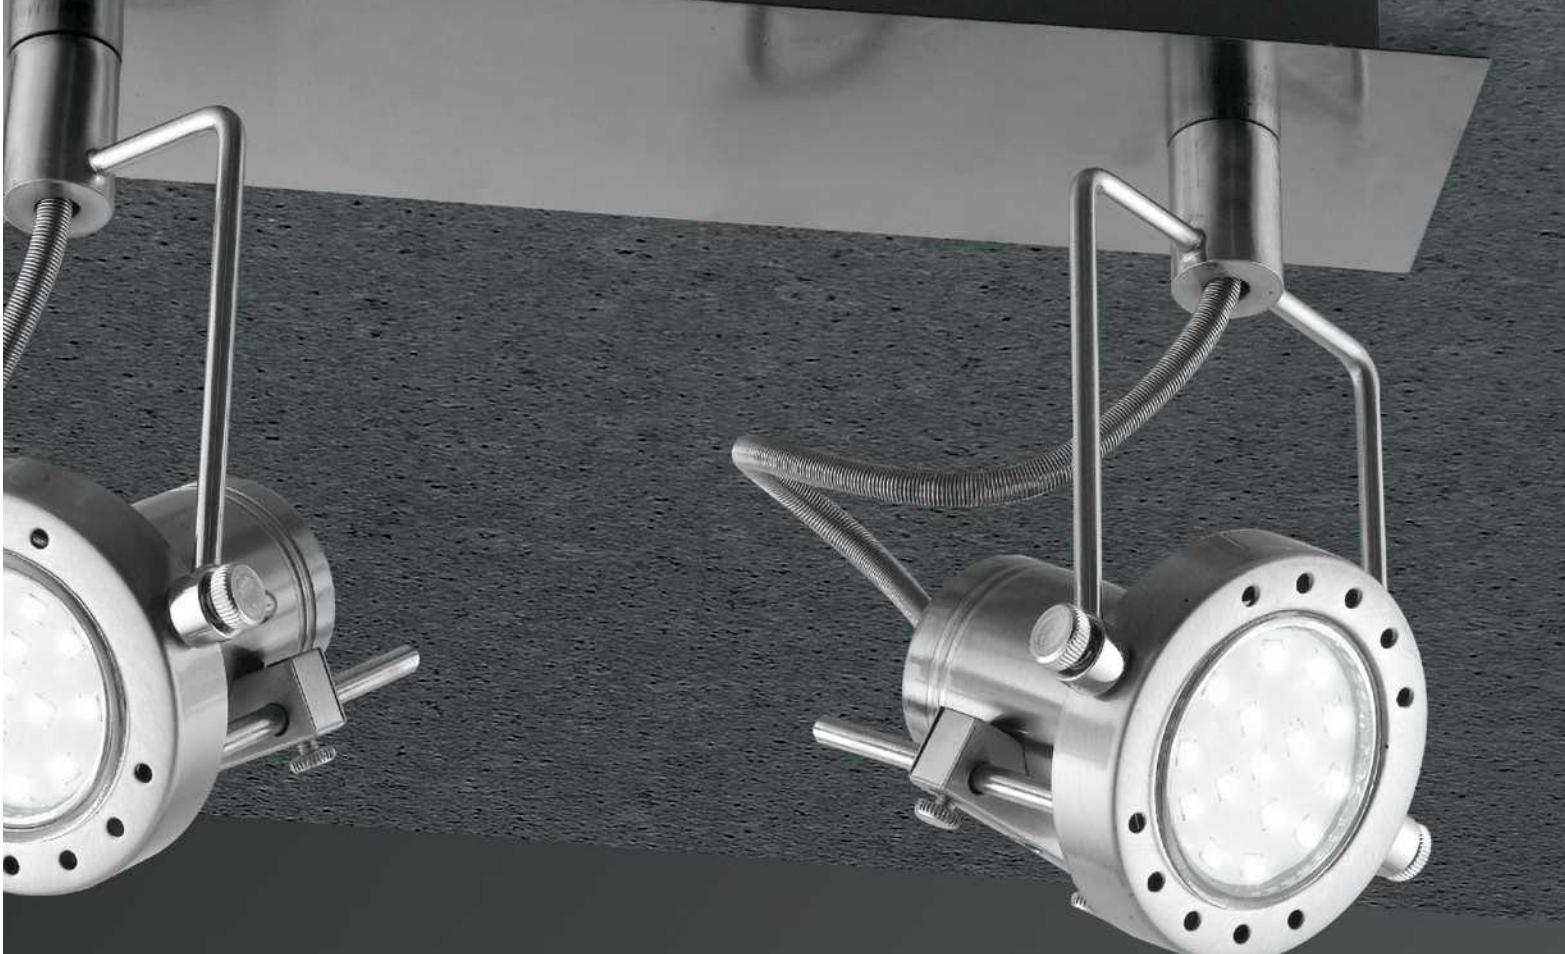


GU10

Attacco sorgente
LampholderOrientabile
AdjustableLampadina LED SMD inclusa
LED SMD light bulb included


Classe	Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off	Durata
A+	☒	3W	80	250	100°	3000 ⚡	>10.000	25000h

SPOT-TECHNO-1
8031422881108


1XGU10 3W LED

Misure - size
dimensioni in mm - size mm

CE ⓘ

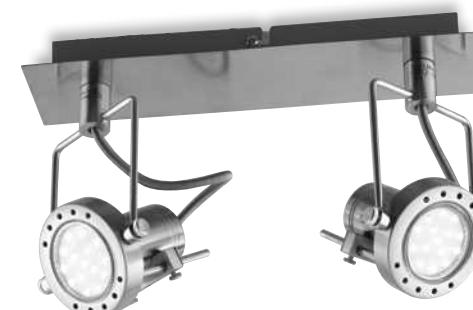SPOT-TECHNO-2
8031422891107


2XGU10 3W LED

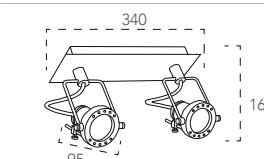Misure - size
dimensioni in mm - size mm

CE ⓘ

SPOT-TECHNO-3
8031423041105


3XGU10 3W LED

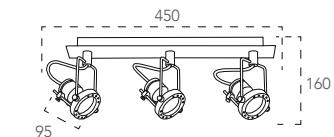Misure - size
dimensioni in mm - size mm

CE ⓘ

SPOT-TECHNO-PL4
8031423051104

4XGU10 3W LED

Misure - size
dimensioni in mm - size mm

CE ⓘ


SUNNY

Spot in metallo con punti luce orientabili, finitura nickel spazzolato

Metal adjustable spot light brushed nickel finish




GU10

Attacco sorgente
LampholderOrientabile
AdjustableLampadina LED SMD inclusa
LED SMD light bulb included

Classe	Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off	Durata
A+	☒	3W	80	250	100°	3000 ⚡	>10.000	25000h

SPOT-SUNNY-1
8031431831187


1XGU10 3W LED

Misure - size
dimensioni in mm - size mm

CE Ⓜ

SPOT-SUNNY-2
8031431841186


2XGU10 3W LED

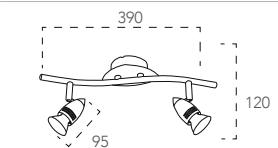Misure - size
dimensioni in mm - size mm

CE Ⓜ

SPOT-SUNNY-S3
8031431861184


3XGU10 3W LED

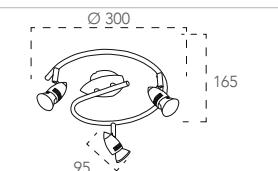Misure - size
dimensioni in mm - size mm

CE Ⓜ

SPOT-SUNNY-4
8031431851185

4XGU10 3W LED

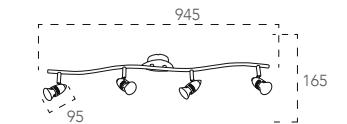Misure - size
dimensioni in mm - size mm

CE Ⓜ

MIAMI



Spot in metallo con punti luce orientabili, finitura nickel spazzolato base con cornice in vetro trasparente
Metal adjustable spot light brushed nickel finish base with transparent glass edge



Attacco sorgente
Lampholder



Orientabile
Adjustable



Lampadina LED SMD inclusa
LED SMD light bulb included


Classe	Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off	Durata
A+	☒	3W	80	250	100°	3000 ⚡	>10.000	25000h



SPOT-MIAMI 01
8031414076772

1XGU10 3W LED


Misure - size
dimensioni in mm - size mm



SPOT-MIAMI 02
8031414076796

2XGU10 3W LED


Misure - size
dimensioni in mm - size mm

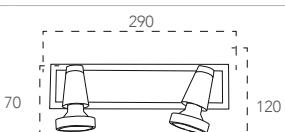

SPOT-MIAMI 03
8031414076802

3XGU10 3W LED


Misure - size
dimensioni in mm - size mm

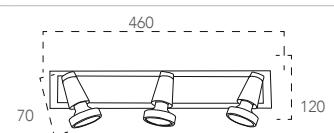

SPOT-MIAMI PL4
8031414076819

4XGU10 3W LED

Misure - size
dimensioni in mm - size mm

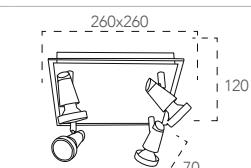

COOPER




Spot in metallo con punti luce orientabili, finitura silver

Metal adjustable spot light silver finish




GU10

Attacco sorgente
LampholderOrientabile
AdjustableLampadina LED SMD inclusa
LED SMD light bulb included

Classe	Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off	Durata
A+	☒	3W	80	250	100°	4000	>10.000	25000h

SPOT-COOPER-1
8031440360913


1XGU10 3W LED

Misure - size
dimensioni in mm - size mm

CE (UL)

SPOT-COOPER-2
8031440360920


2XGU10 3W LED

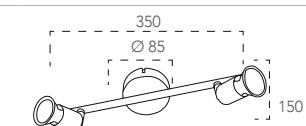Misure - size
dimensioni in mm - size mm

CE (UL)

SPOT-COOPER-3
8031440360937


3XGU10 3W LED

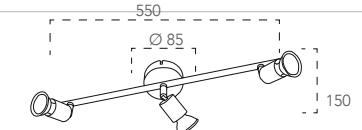Misure - size
dimensioni in mm - size mm

CE (UL)

SPOT-COOPER-4
8031440360944

4XGU10 3W LED

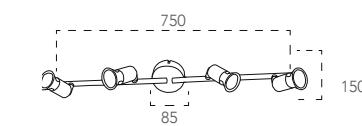Misure - size
dimensioni in mm - size mm

CE (UL)

CADILLAC

Spot in metallo con punti luce orientabili, finitura cromo

Metal adjustable spot light chrome finish



Orientabile
Adjustable



Lampadina non
inclusa
Light bulb not
included



Attacco sorgente
Lampholder




Lampadina
consigliata
suggested
light bulb



SPOT-CADILLAC-1
8031438541256

1XE14 MAX 40W

Misure - size
dimensioni in mm - size mm




CE



SPOT-CADILLAC-2
8031438551255

2XE14 MAX 40W

Misure - size
dimensioni in mm - size mm




CE



SPOT-CADILLAC-3
8031414076918

3XE14 MAX 40W

Misure - size
dimensioni in mm - size mm




CE



SPOT-CADILLAC-PL4
8031438521258

4XE14 MAX 40W

Misure - size
dimensioni in mm - size mm



CE

MITO

Spot in metallo con punti luce orientabili, finitura nickel spazzolato, diffusori in vetro bianco

Metal adjustable spot light brushed nickel finish, white glass diffusers



Orientabile
Adjustable



Lampadina non
inclusa
Light bulb not
included




Attacco sorgente
Lampholder



SPOT-MITO-1
8031431791184

1XE14 MAX 40W

Misure - size
dimensioni in mm - size mm




CE



SPOT-MITO-PL3
8031431801180

3XE14 MAX 40W

Misure - size
dimensioni in mm - size mm




CE



SPOT-MITO-S3
8031431811189

3XE14 MAX 40W

Misure - size
dimensioni in mm - size mm




CE



SPOT-MITO-S4
8031431821188

4XE14 MAX 40W

Misure - size
dimensioni in mm - size mm

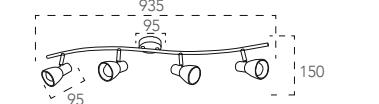

CE

CARRERA

Spot in metallo con punti luce orientabili, finitura bianca

Metal adjustable spot light white finish



Orientabile
Adjustable



Lampadina non inclusa
Light bulb not included




Attacco sorgente
Lampholder



SPOT-CARRERA-1
8031431701183

1XE27 MAX 40W

Misure - size
dimensioni in mm - size mm



CE



SPOT-CARRERA-C
8031431731180

1XE27 MAX 40W

Misure - size
dimensioni in mm - size mm




CE



SPOT-CARRERA-2
8031431711182

2XE27 MAX 40W

Misure - size
dimensioni in mm - size mm

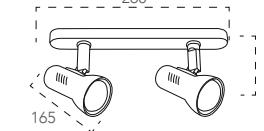


CE



SPOT-CARRERA-3
8031431721181

3XE27 MAX 40W

Misure - size
dimensioni in mm - size mm

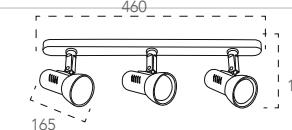


CE



SPOT-CARRERA-PL3
8031431741189

3XE27 MAX 40W

Misure - size
dimensioni in mm - size mm

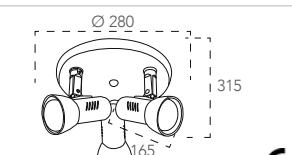

CE



DOUBLEU

Lampadina non inclusa
Light bulb not included



Attacco sorgente
Lampholder




I-PORTALAMPADE-E27-WO
8031440364874

1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



I-PORTALAMPADE-E27-WS
8031440364867

1XE27 MAX 42W


Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





UNIX

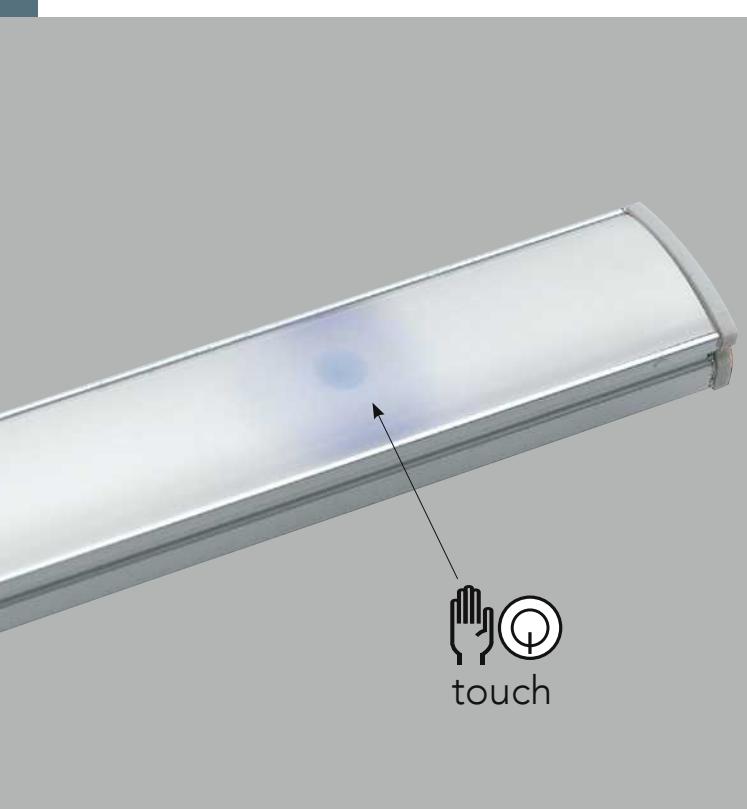

Barra sotto pensile

Materiale

Struttura in alluminio, diffusore in pc riflettente

Colore

Nikel

Sorgente luminosa

LED SMD integrato

Driver

Incluso

Temperatura colore

4000K



Interruttore

Touch

Durata e on/off

25.000h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

Cabinet bar

Material

Alluminium body with PC reflective diffuser

Colour

Nikel

Light source

LED SMD built-in

Driver

Included

Colour temperature

4000K



Switch

Touch

Lifetime and on/off

25.000h ~ >10.000 on/off

Beam angle

120°

CRI

>80


CLASSE A CE EMC

LEDBAR-UNIX-30

8031414866403


5,76W- 400 Lm

Accessori inclusi - included accessories



Misure - Size

dimensioni in mm - size mm



Misure - Size

dimensioni in mm - size mm




LEDBAR-UNIX-45

8031414864614


8,64W- 600 Lm

Accessori inclusi - included accessories



Misure - Size

dimensioni in mm - size mm




LEDBAR-UNIX-60

8031414864621

11,52W- 800 Lm

Accessori inclusi - included accessories



Misure - Size

dimensioni in mm - size mm



UNIX


LEDBAR-UNIX-90

8031414864492

17,28W- 1180 Lm

Misure - Size

dimensioni in mm - size mm



LEDBAR-UNIX-120

8031414864508

23,04W- 1560 Lm

Misure - Size

dimensioni in mm - size mm




LEDBAR-UNIX-150

8031414865185

28,8W- 1950 Lm

Misure - Size

dimensioni in mm - size mm



LEDBAR-UNIX-180

8031414865154

34,56W- 2350 Lm

Misure - Size

dimensioni in mm - size mm



LEDBAR-UNIX-210

8031414865161

40,32W- 2730 Lm

Misure - Size

dimensioni in mm - size mm



LEDBAR-UNIX-270

8031414865178

51,84W- 3510 Lm

Misure - Size

dimensioni in mm - size mm




LEDBAR-UNIX-300

8031414870738


57,6W- 3900 Lm

Misure - Size


dimensioni in mm - size mm




Accessori inclusi - included accessories

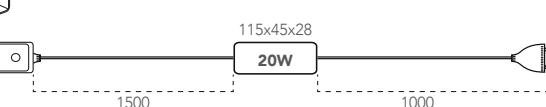


Accessori inclusi - included accessories

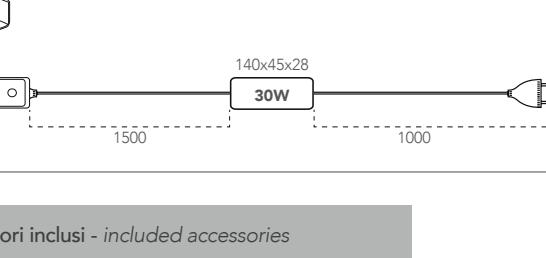

Accessori inclusi - included accessories

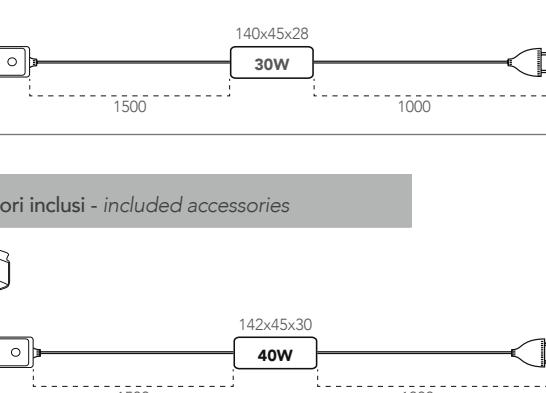

Accessori inclusi - included accessories

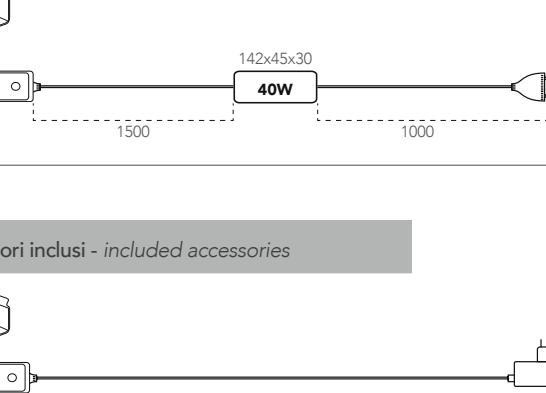

Accessori inclusi - included accessories



Accessori inclusi - included accessories



Accessori inclusi - included accessories



UNIX



Barra angolare sotto pensile
Angular cabinet bar

Material
Alluminium body with PC reflective diffuser

Materiale

struttura in alluminio, diffusore in pc riflettente

Colore

Nikel

Sorgente luminosa

LED SMD integrato

Driver

Incluso

Temperatura colore

4000K

Interruttore

Touch

Durata e on/off

25.000h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

Material

Alluminium body with PC reflective diffuser

Colour

Nikel

Light source

LED SMD built-in

Driver

Included

Colour temperature

4000K

Switch

Touch

Lifetime and on/off

25.000h ~ >10.000 on/off

Beam angle

120°

CRI

>80




UNIX

LEDBAR-UNIX-120 ANG
8031414864577


23,04W- 1560 Lm

Misure - Size

dimensioni in mm - size mm



Accessori inclusi - included accessories

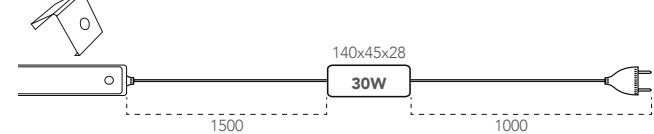


LEDBAR-UNIX-150 ANG
8031414866373

28,8W- 1950 Lm

Misure - Size

dimensioni in mm - size mm



Accessori inclusi - included accessories




LEDBAR-UNIX-180 ANG
8031414866380


34,56W- 2350 Lm

Misure - Size

dimensioni in mm - size mm



Accessori inclusi - included accessories

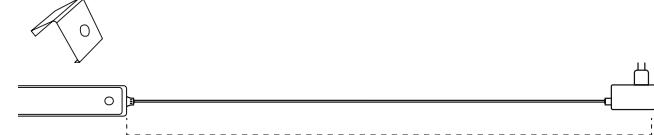


LEDBAR-UNIX-210 ANG
8031414866359

40,32W- 2730 Lm

Misure - Size

dimensioni in mm - size mm




Accessori inclusi - included accessories



LEDBAR-UNIX-45 ANG
8031414864607


8,64W- 600 Lm

Accessori inclusi - included accessories

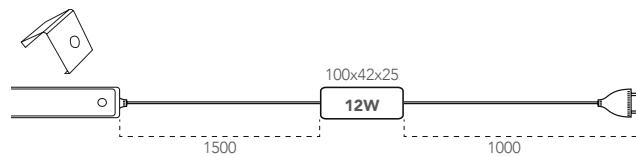

Misure - Size


dimensioni in mm - size mm



LEDBAR-UNIX-60 ANG
8031414864478

11,52W- 800 Lm

Accessori inclusi - included accessories

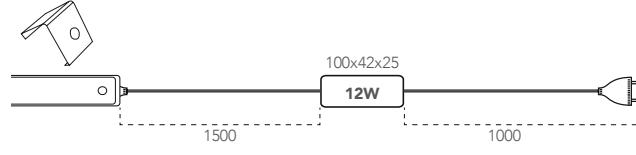

Misure - Size


dimensioni in mm - size mm



LEDBAR-UNIX-90 ANG
8031414864485

17,28W- 1180 Lm

Accessori inclusi - included accessories

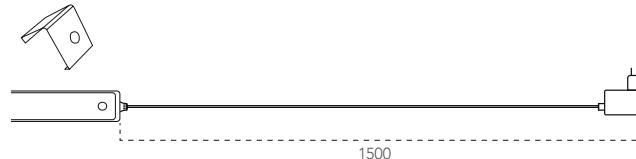

Misure - Size

dimensioni in mm - size mm




LEDBAR-UNIX-240 ANG
8031414866366

46,08W- 3120 Lm

Misure - Size

dimensioni in mm - size mm



Accessori inclusi - included accessories




LEDBAR-UNIX-300 ANG
8031414866342

57,6W- 3900 Lm

Misure - Size

dimensioni in mm - size mm



Accessori inclusi - included accessories



BATTEN



Barra sotto pensile

Cabinet bar

Materiale

Struttura in PC bianco, diffusore in pc bianco

Material

PC white body with PC white diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD integrato

Light source

LED SMD built-in

Driver

Integrato

Driver

Built-in driver

Temperatura colore

4000K

Color temperature

4000K

Durata e on/off

15.000h ~ >7.500 on/off

Lifetime and on/off

15.000h ~ >7.500 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80




LED-BATTEN-30
8031440357722

9W- 810 Lm

Accessori inclusi
included accessories



Misure - Size
dimensioni in mm - size mm

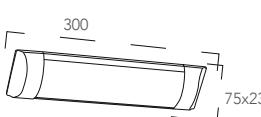


LED-BATTEN-60
8031440357739

18W- 1620 Lm

Accessori inclusi
included accessories



Misure - Size
dimensioni in mm - size mm

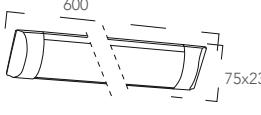


LED-BATTEN-120
8031440357746

36W- 3240 Lm

Accessori inclusi
included accessories



Misure - Size
dimensioni in mm - size mm

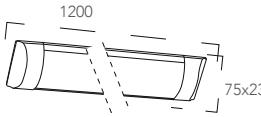

LED-BATTEN-150
8031440357753

48W- 4320 Lm

Accessori inclusi
included accessories



Misure - Size
dimensioni in mm - size mm



T8



Barra a LED integrato per sotto pensile

Cabinet built-in LED bar



Materiale

Struttura in alluminio, diffusore in pc

Material

Aluminum body with PC diffuser

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD integrato

Light source

LED SMD built-in

Driver

Integrato

Driver

Built-in driver

Temperatura colore

4000K

Color temperature

4000K

Durata e on/off

25.000h ~ >12.500 on/off

Lifetime and on/off

25.000h ~ >12.500 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80



LEDBAR-T8-60
8031414875382

9W- 850 Lm

Accessori inclusi
included accessories



Misure - Size
dimensioni in mm - size mm




LEDBAR-T8-120
8031414875399

18W- 1700 Lm

Accessori inclusi
included accessories



Misure - Size
dimensioni in mm - size mm

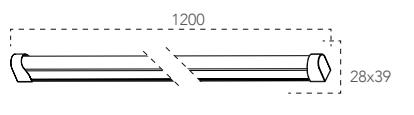


LEDBAR-T8-150
8031414875405

24W- 2300 Lm

Accessori inclusi
included accessories



Misure - Size
dimensioni in mm - size mm

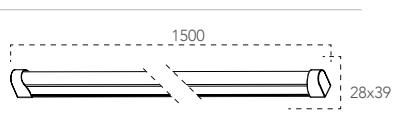

T5

Barra sotto pensile con interruttore

Cabinet bar with switch



Materiale

Struttura in PC diffusore in pc

Colore

Bianco

Sorgente luminosa

LED SMD integrato

Driver

Integrato

Temperatura colore

4000K

Interruttore

incluso

Durata e on/off


20.000h ~ >10.000 on/off

Angolo di luce

135°

CRI


>80



T5



Accessori inclusi
included accessories




LEDBAR-T5-30
8031440354691

5W- 500 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories




LEDBAR-T5-60
8031440354707

8W- 800 Lm

Misure - Size
dimensioni in mm - size mm




Accessori inclusi
included accessories




LEDBAR-T5-90
8031440354677

12W- 1200 Lm

Misure - Size
dimensioni in mm - size mm




Accessori inclusi
included accessories




LEDBAR-T5-120
8031440354684

15W- 1500 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories



LEDBAR-T5-150
8031414871742

18W- 1800 Lm

Misure - Size
dimensioni in mm - size mm



MOVIE



Barra sotto pensile orientabile

Adjustable cabinet bar

Materiale

Struttura in PC diffusore in pc

Colore

Bianco

Sorgente luminosa

LED SMD integrato

Driver

integrato

Temperatura colore

4000K

Interruttore

incluso

Durata e on/off

15.000 h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

AC220V~ 240V 50Hz

MULTI-CONNECT



Material

PC body with PC diffuser

Colour

White

Light source

Built-in LED SMD

Driver

Built-in

Colour temperature

4000K

Switch

included

Lifetime and on/off

15.000 h ~ >10.000 on/off

Beam angle

120°


CRI

>80


MOVIE




Accessori inclusi
included accessories



150



1500




connettore


LEDBAR-MOVIE-S
8031414866427

5W- 425 Lm


Misure - Size
dimensioni in mm - size mm

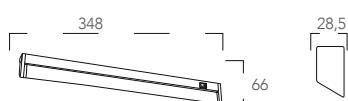

Accessori inclusi
included accessories



150



1500




connettore


LEDBAR-MOVIE
8031440355100

10W- 850 Lm


Misure - Size
dimensioni in mm - size mm

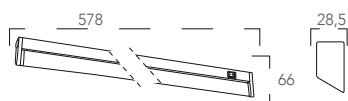


Accessori inclusi
included accessories



150



1500




connettore

LEDBAR-MOVIE-L
8031414866441

15W- 1275 Lm

Misure - Size
dimensioni in mm - size mm

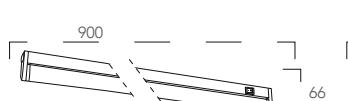

LINE


Barra incasso sotto pensile con sensore di movimento Recessed cabinet bar with motion sensor

Materiale

Struttura in alluminio, diffusore in pc riflettente

Material

Alluminium body with PC reflective diffuser

Sorgente luminosa

LED SMD integrato 12V DC

Light source

LED SMD built-in 12V DC

Driver

Non incluso

Driver

Not included

Temperatura colore

4000K

Colour temperature

4000K

Interruttore

Sensore di movimento

Switch

Motion sensor

Durata e on/off

25.000h ~ >10.000 on/off

Lifetime and on/off

25.000h ~ >10.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI



>80

CRI

>80


Accessori inclusi
included accessories


sensore di movimento regolabile
adjustable motion sensor

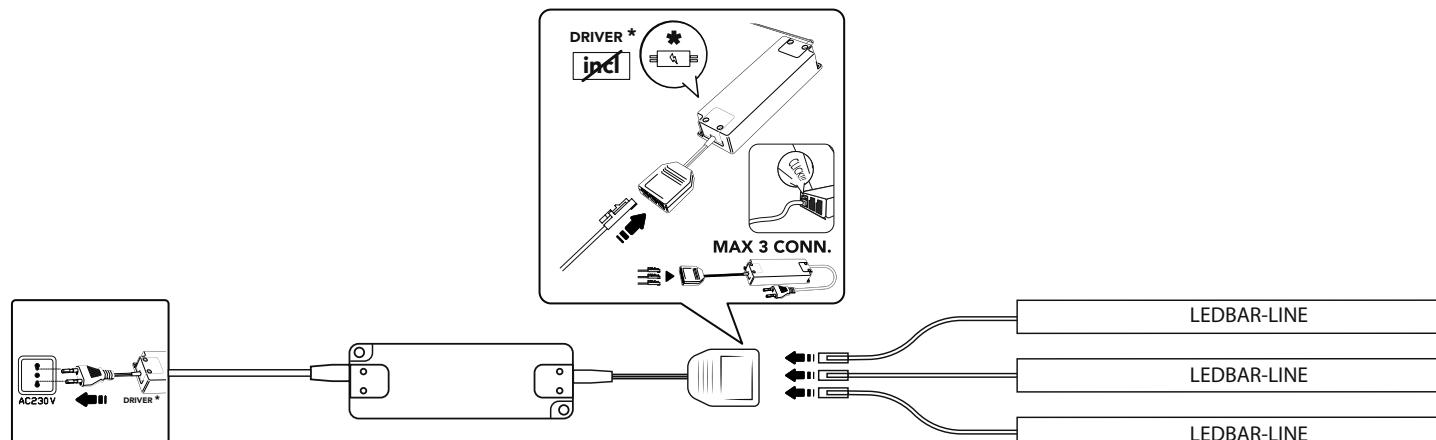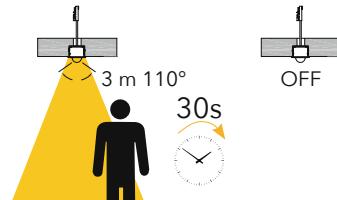
LINE



LEDBAR-LINE-91
8031414874286 9,5W- 500 Lm

Accessori inclusi
included accessories


Foro - cut out
dimensioni in mm -
size mm




Misure - Size
dimensioni in mm -
size mm

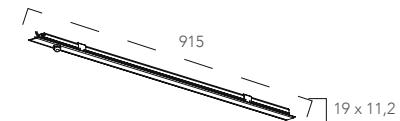

LEDBAR-LINE-127
8031414874279 13,5W- 710 Lm

Accessori inclusi
included accessories


Foro - cut out
dimensioni in mm -
size mm




Misure - Size
dimensioni in mm -
size mm



LEDBAR-LINE-199
8031414874309 19,5W- 1030 Lm

Accessori inclusi
included accessories


Foro - cut out
dimensioni in mm -
size mm



Misure - Size
dimensioni in mm -
size mm



LEDBAR-LINE-223
8031414874293 21W- 1120 Lm

Accessori inclusi
included accessories


Foro - cut out
dimensioni in mm -
size mm



Misure - Size
dimensioni in mm -
size mm



LED-DRIVER-LINE-33
8031414874262

Driver 33W 200-240V Dc12v
2.75A Cavo 1M 2X0.75mm
Con Spina
Driver 33W 200-240V Dc12v
2.75A Cable 1M 2X0.75mm
with plug

Driver con connettore
multientrata max 3 barre
MAX 33W
Driver with multi connector
max 3 bar
MAX 33W

Misure - Size
dimensioni in mm - size mm



LED-DRIVER-LINE-54
8031414874255

Driver 54W 200-240V Dc12v
4.5A Cavo 1M 2X0.75mm
Con Spina
Driver 54W 200-240V Dc12v
4.5A Cable 1M 2X0.75mm
with plug

Driver con connettore
multientrata max 3 barre
MAX 54W
Driver with multi connector
max 3 bar
MAX 54W

Misure - Size
dimensioni in mm - size mm

CLOSET



sensore di movimento
motion sensor



Lampada con sensore di movimento ricaricabile

Rechargeable lamp with motion sensor

Materiale

Policarbonato

Colore

silver

Sorgente luminosa

LED SMD 1W

Batteria

inclusa DC 5V 1A

Temperatura colore

4000K

Material

Polycarbonate

Colour

silver

Light source

LED SMD 1W

Battery

included DC 5V 1A

Colour temperature

4000K



LED-CLOSET-10
8031414873012


1W - 105 Lm

Misure - Size


dimensioni in mm - size mm



sensore di movimento
motion sensor

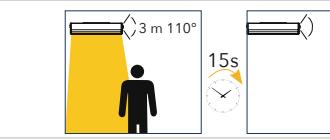

batteria ricaricabile
rechargeable battery



Micro USB charging wires
DC 5V
cavo non incluso
not included cable

TRIGGER



Kit 2pz. copri cerniera per anta

Kit 2pcs hinge lamp

Materiale

Policarbonato di colore grigio

Colore

silver

Sorgente luminosa

LED SMD 0,2W DC12V

Batteria

2x23A non incluse

Temperatura colore

4000K

Material

Polycarbonate in gray colour

Colour

silver

Light source

LED SMD 0,2W DC12V

Battery

2x23A not included

Colour temperature

4000K



LED-Trigger
8031414873005

KIT 2PZ

Misure - Size
dimensioni in mm - size mm



compatibile per cerniera a scatto collo "0"
Compatible with "0" neck snap hinge

SHELF



sensore di movimento
motion sensor



Lampada con sensore di movimento ricaricabile

Rechargeable lamp with motion sensor

Materiale

Policarbonato

Colore

struttura silver diffusore bianco

Sorgente luminosa

LED SMD 1W

Batteria

inclusa DC 5V 1A

Temperatura colore

4000K

Material

Polycarbonate

Colour

silver structure white diffuser

Light source

LED SMD 1W

Battery

included DC 5V 1A

Colour temperature

4000K




LED-SHELF-R7
8031414873029

1W - 110 Lm

Misure - Size


dimensioni in mm - size mm



sensore di movimento
motion sensor



batteria ricaricabile
rechargeable battery



Micro USB charging wires
DC 5V
cavo non incluso
not included cable



SONAR



45°

orientabile
adjustable



sensore di movimento
motion sensor

Barra sotto pensile con sensore di movimento

Materiale

Policarbonato

Colore

silver

Sorgente luminosa

LED SMD 6X0,45W

Batteria

3x1,5V AAA non inclusa

Temperatura colore

4500K

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

45°

CRI

>80

LED-SONAR-AP
8031440021272

Cabinet bar with motion sensor

Material

Polycarbonate

Colour

silver

Light source

LED SMD 6X0,45W

Battery

3x1,5V AAA not included

Colour temperature

4500K

Lifetime and on/off

25.000 h ~ >10.000 on/off

Beam angle

45°

Driver

>80



LED-SONAR-AP
8031440021272


6X0,45W - 35 Lm

Misure - Size

dimensioni in mm - size mm



YOUNG

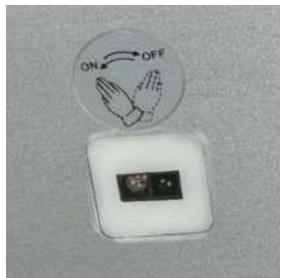

interruttore ottico
optical switch

Barra sotto pensile con interruttore ottico

Materiale

Alluminio

Colore

silver

Sorgente luminosa

LED SMD 4,9W

Driver

Incluso

Temperatura colore

4000K

Flusso luminoso

320 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

LED-YOUNG-5W
8031440071277

Cabinet bar with optical switch

Material

aluminium

Colour

silver

Light source

LED SMD 4,9W

Driver

Included

Colour temperature

4000K

Luminous flux

320 Lm

Lifetime and on/off

25.000 h ~ >10.000 on/off

Beam angle

120°

CRI

>80



Misure - Size

dimensioni in mm - size mm



Accessori inclusi
Included accessories

x1 Alimentatore
x1 Power supply
con cavo 2000 mm
with 2000mm cable included

VISTA



sensore di movimento
motion sensor

Lampada LED con sensore di movimento

Materiale

Policarbonato

Colore

bianco - silver

Sorgente luminosa

LED SMD

Batteria inclusa

3x1,5V AAA

Temperatura colore

4500K - 6000K

Durata e on/off

25.000 h ~ >10.000 on/off

Motion sensor LED lamp

Material

Polycarbonate

Colour

silver - white

Light source

LED SMD

Battery included

3x1,5V AAA

Color temperature

4500K - 6000K

Lifetime and on/off

25.000 h ~ >10.000 on/off




LED-VISTA-M-AP
8031440031271

3X0,075W - 18 Lm

Misure - Size

dimensioni in mm - size mm



Fascio di luce orientabile
Adjustable beam angle



68°


88°

LED-VISTA-AP
8031439991272

3X0,075W - 20 Lm

Misure - Size

dimensioni in mm - size mm



Accessori inclusi
Included accessories

sensore di movimento
motion sensor




on 10LUX

3 mt 90°



15s-45s

off



PROFILO profile

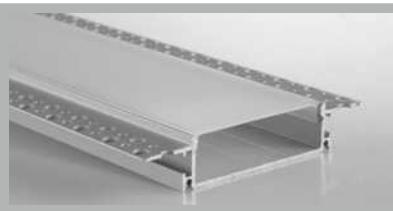Profili in alluminio
Aluminium profileI-PROFILO-GORIZIA-XL
8031414871094



Profilo 2m a rapido fissaggio nel cartongesso diffusore opale e tappi inclusi
2m quick fixing profile in plasterboard with opal diffuser and caps included

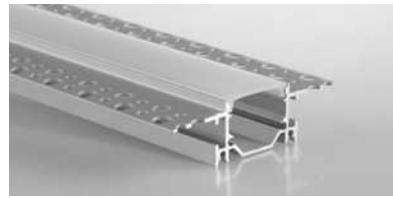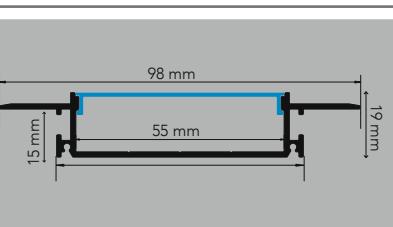I-PROFILO-GORIZIA
8031414871124


Profilo 2m a rapido fissaggio nel cartongesso diffusore opale e tappi inclusi
2m quick fixing profile in plasterboard with opal diffuser and caps included

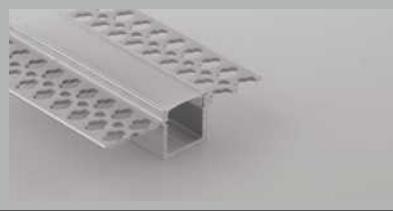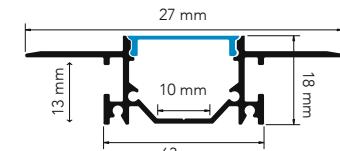I-PROFILO-GORIZIA-S
8031414876587



Profilo 2m a rapido fissaggio nel cartongesso diffusore opale e tappi inclusi
2m quick fixing profile in plasterboard with opal diffuser and caps included

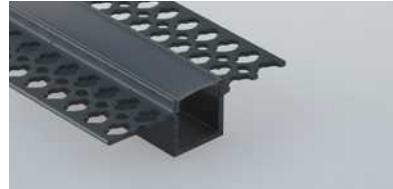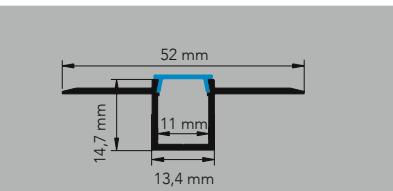I-PROFILO-GORIZIA-S NER
8031414876624



Profilo 2m di colore nero matto a rapido fissaggio nel cartongesso diffusore nero traslucido e tappi inclusi
2m quick fixing profile in plasterboard Matt black with translucent black diffuser and caps included

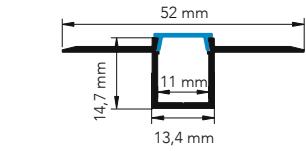I-PROFILO-CAMELOT
8031414871087



Profilo flessibile 2m diffusore opale tappi e staffette inclusi
Flexible profile 2m with opal diffuser, caps and bracket included

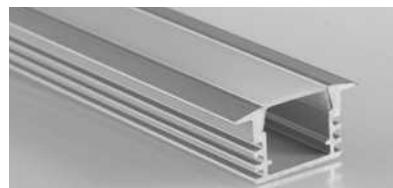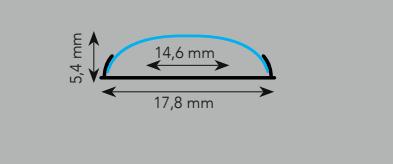I-PROFILO-BERLINO
8031434611212


Profilo 1m a rapido fissaggio nel cartongesso diffusore opale tappi e staffette inclusi
1m quick fixing profile in plasterboard with opal diffuser caps and bracket included

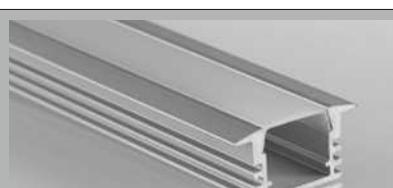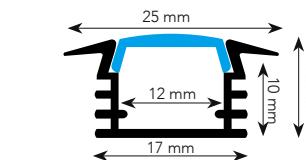I-PROFILO-BERLINO-2
8031440359405


Profilo 2m a rapido fissaggio nel cartongesso diffusore opale tappi e staffette inclusi
2m quick fixing profile in plasterboard with opal diffuser caps and bracket included

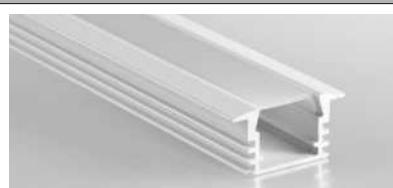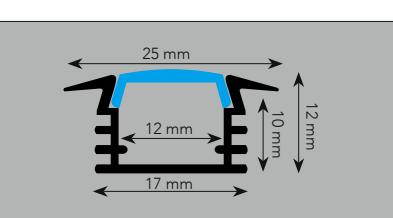I-PROFILO-BERLINO-2 BCO
8031414871070



Profilo BIANCO 2m a rapido fissaggio nel cartongesso diffusore opale tappi e staffette inclusi
2m quick fixing profile in plasterboard WHITE colour with opal diffuser caps and bracket included

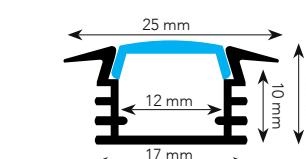I-PROFILO-BERLINO-2 NER
8031414876617



Profilo 2m di colore NERO matto a rapido fissaggio nel cartongesso diffusore nero tappi e staffette inclusi
2m quick fixing profile in plasterboard Matt black with black diffuser caps and bracket included

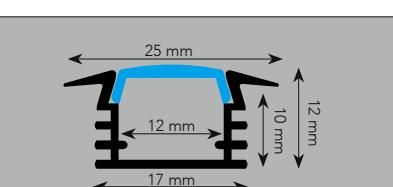I-PROF-BERLINO2-DIFF
8031440357647


Diffusore trasparente per profili Berlino
PC transparent diffuser for Berlino

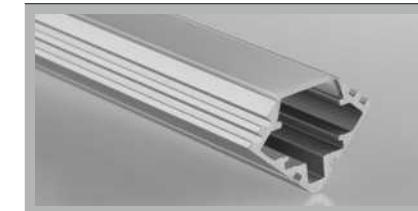I-PROFILO-NEWYORK
8031434581218



Profilo angolare 1m a rapido fissaggio nel cartongesso diffusore opale tappi e staffette inclusi
1m quick fixing angular profile in plasterboard with opal diffuser caps and bracket included

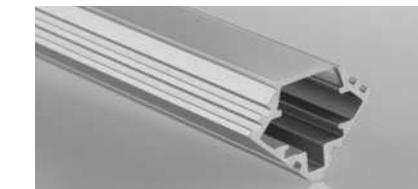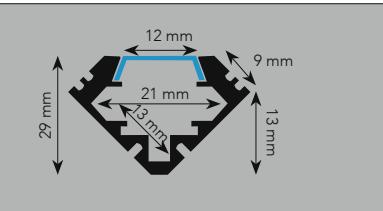I-PROFILO-NEWYORK-2
8031440359382



Profilo angolare 2m a rapido fissaggio nel cartongesso diffusore opale tappi e staffette inclusi
2m quick fixing angular profile in plasterboard with opal diffuser caps and bracket included

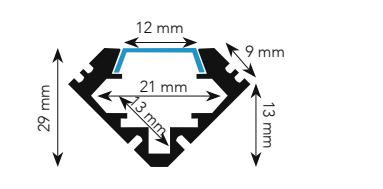I-PROF-NEWYORK2-DIFF
8031440357623


Diffusore trasparente profilo New York angolare alluminio
PC transparent diffuser for New York.

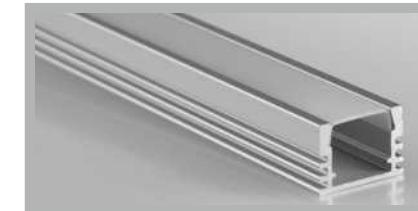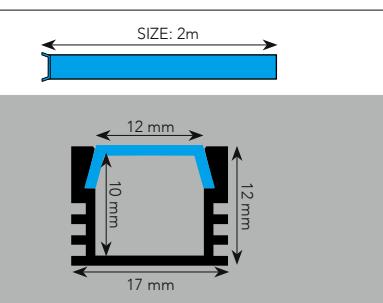I-PROFILO-ROMA
8031434601213


Profilo 1m a rapido fissaggio nel cartongesso o superfici esterne diffusore opale tappi e staffette inclusi
1m quick fixing profile in plasterboard or surface mount with opal diffuser caps and bracket included

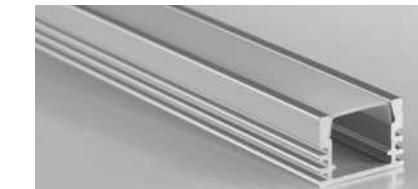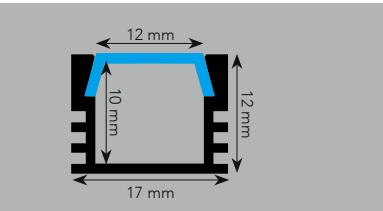I-PROFILO-ROMA-2
8031440359399



Profilo 2m a rapido fissaggio nel cartongesso o superfici esterne diffusore opale tappi e staffette inclusi
2m quick fixing profile in plasterboard or surface mount with opal diffuser caps and bracket included

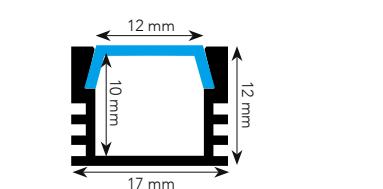I-PROFILO-ROMA-2 NER
8031414876600


Profilo 2m di colore nero matto a rapido fissaggio nel cartongesso o superfici esterne diffusore nero traslucido tappi e staffette inclusi
2m quick fixing profile in plasterboard or surface mount Matt black with translucent black diffuser caps and bracket included

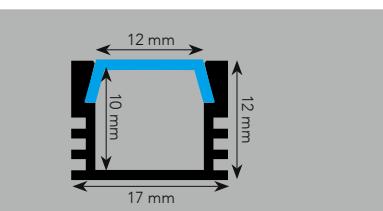I-PROF-ROMA2-DIFF
8031440357630


Diffusore trasparente profilo Roma alluminio
PC transparent diffuser for Rome.

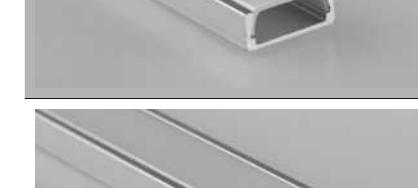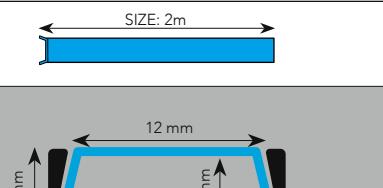I-PROFILO-MILANO
8031434611854


Profilo 1m diffusore opale tappi e staffette inclusi
Profile 1m with opal diffuser, caps and bracket included

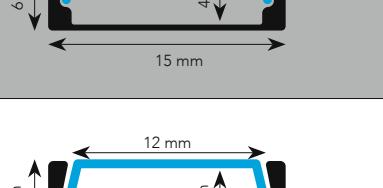I-PROFILO-MILANO-2
8031440359412

Profilo 2m diffusore opale tappi e staffette inclusi
Profile 2m with opal diffuser, caps and bracket included

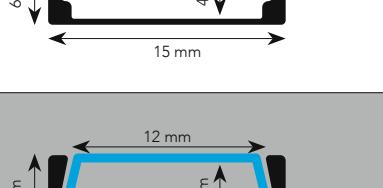I-PROFILO-MILANO-2 BCO
8031414871100

Profilo BIANCO 2m diffusore opale tappi e staffette inclusi
WHITE profile 2m with opal diffuser, caps and bracket included

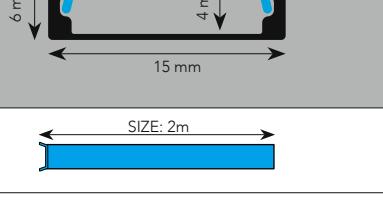I-PROF-MILANO2-DIFF
8031440357654

Diffusore trasparente profilo Milano alluminio
PC transparent diffuser for Berlino.




PROFILO profile

Profili in alluminio
Aluminium profile




I-PROFILO-DORIK-2
8031414876556

Profilo 2m con fissaggio a parete
diffusore angolare opale tappi e
staffe inclusi
2m profile surface mount with opal
diffuser and caps included





I-PROFILO-IONIK-2
8031414876549

Profilo 2m con fissaggio a parete
diffusore angolare opale, tappi e
staffe inclusi
2m profile surface mount with opal
diffuser and caps included





I-PROFILO-RIDGE-2
8031414876570

Profilo 2m angolare a rapido
fissaggio nel cartongesso diffusore
opale tappi e staffe inclusi
2m quick fixing angular profile in
plasterboard with opal diffuser and
caps included

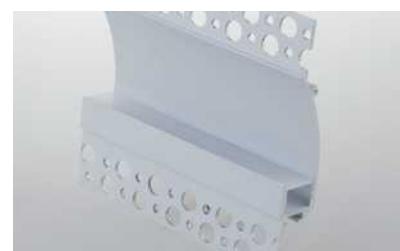


I-PROFILO-TRIM-2
8031414876563

Profilo 2m a veletta bianco
diffusore opale incluso
2m profile in white colour
plasterboard veil with opal
diffuser included

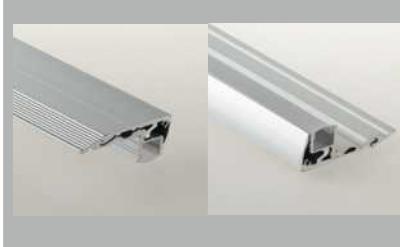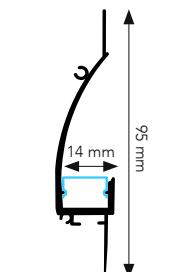


I-PROFILO-STEPWAY
8031414876594

Profilo 2m per gradini diffusore
opale tappi inclusi
2m profile for step with opal
diffuser included



I-PROFILO-PIANO-2
8031414878802

Profilo base per dissipazione strip
colore silver 2m
2m profile dissipation base silver
colour



ACCESSORI accessories

Accessori per barre LED
LED bar accessories




STRIP-HANDESENSOR-W
8031414879335

SCHEDA RILEVATORE MOVIMENTO MANO PER STRIP SINGOLO COLORE
INPUT DC5V-24V OUTPUT 12V 120W - 24V 240W
HAND MOTION CARD FOR SINGLE COLOR STRIP
INPUT DC5V-24V OUTPUT 12V 120W - 24V 240W



STRIP-PIRSENSOR
8031414879373

SCHEDA SENSORE MOVIMENTO PIR PER STRIP
INPUT DC5V-24V OUTPUT 12V 120W - 24V 240W
PIR MOTION SENSOR CARD FOR STRIP
INPUT DC5V-24V OUTPUT 12V 120W - 24V 240W

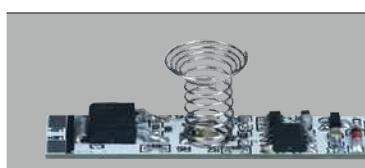


STRIP-TOUCH-CCT
8031414879366

SCHEDA PULSANTE TOUCH PER STRIP CCT
INPUT DC5V-24V OUTPUT 12V 60W 24V120W
TOUCH BOTTON CARD FOR STRIP CCT
INPUT DC5V-24V OUTPUT 12V 60W 24V120W



STRIP-TOUCH-W
8031414879359

SCHEDA PULSANTE TOUCH PER STRIP SINGOLO COLORE
INPUT DC4V-24V OUTPUT 12V 120W 24V240W
TOUCH BOTTON CARD FOR SINGLE COLOR STRIP
INPUT DC4V-24V OUTPUT 12V 120W 24V240W

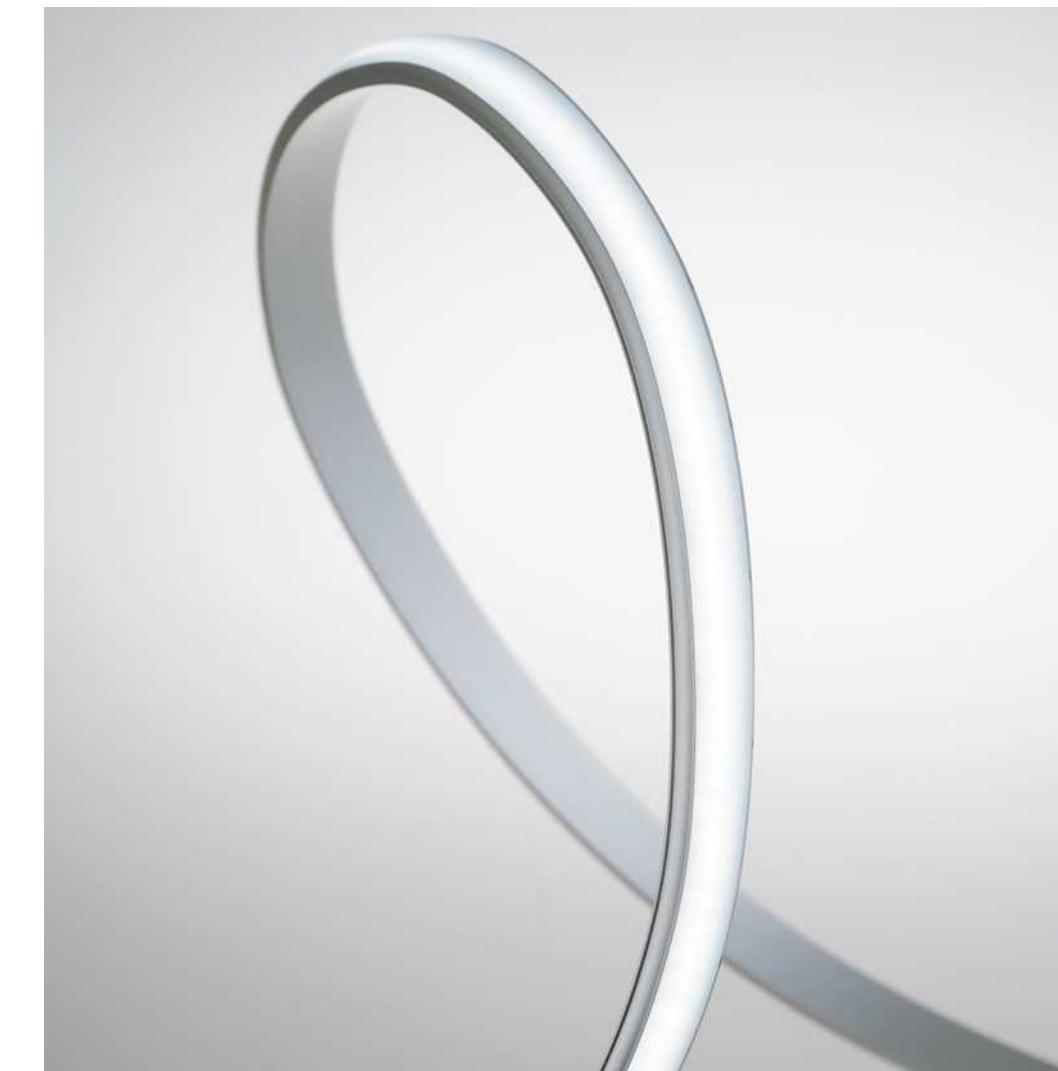

I-PROFILO-CAMELOT
Profilo flessibile
Flexible profile

STRIP

Rotolo 30 metri strip LED



Materiale

Kapton senza silicone

Sorgente luminosa

90xLED/m SMD 2835

Potenza

7,2W/m

Driver

DC36V tensione costante non incluso

Temperatura colore

3000K - 5000K - 4000K



Flusso luminoso

720Lm/m

Grado di protezione

IP20

Durata e on/off

25.000h ~ >15.000 on/off

CRI

>80

Roll 30 meters strip-led

Material

Kapton without silicone

Light source

90xLED/m SMD 2835

Power

7,2W/m

Driver

DC36V costant voltage not included

Color temperature

3000K - 5000K - 4000K



Luminous flux

720Lm/m

IP degree

IP20

Lifetime and on/off

25.000h ~ >15.000 on/off


CRI

>80

STRIP

Rotolo 15 metri strip LED

15 meters roll strip-led

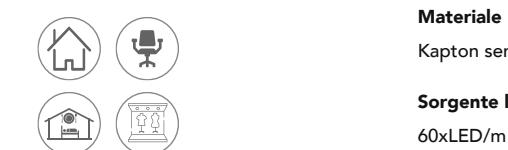

Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

10W/m

Driver

DC24V tensione costante non incluso

Temperatura colore



Grado di protezione

IP20

Durata e on/off

25.000h ~ >15.000 on/off

CRI

>80

Materiale

Kapton without silicone

Light source

60xLED/m SMD 5050

Power

10W/m

Driver

DC24V costant voltage not included

Color temperature



IP degree

IP20

Lifetime and on/off

25.000h ~ >15.000 on/off

CRI

>80

CLASSE
A+ CE EMC

CLASSE
A+ CE EMC



		W/m	Lm/m	LED/m
STRIPLED-CC30-C 8031414864409	●	7,2W	720 LM	90 LED
STRIPLED-CC30-F 8031414864386	●	7,2W	720 LM	90 LED
STRIPLED-CC30-M 8031414864379	●	7,2W	720 LM	90 LED

Misure - Size
30 metri
12 mm


Misura taglio
cut - size
8 LED
100 mm

Driver pag. 567

Controller pag. 574

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT

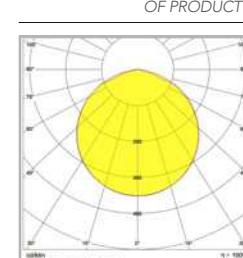

STRIPLED-CC30




		W/m	LED/m
STRIPLED-CC15-RGB 8031414864560		10W	60 LED

Misure - Size
15 metri
12 mm

Misura taglio
cut - size
6 LED
100 mm

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT



STRIPLED-CC15

Driver pag. 567

Controller pag. 574

STRIP

Rotolo strip LED 5 metri

5 meters Roll strip-led

**Materiale**

Kapton senza silicone

Sorgente luminosa

240xLED/m SMD 2835

Potenza

24W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

3000K - 6000K - 4000K

Flusso luminoso

2520Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>90

**Material**

Kapton without silicone

Light source

240xLED/m SMD 2835

Power

24W/m

Driver

DC24V constant voltage not included

Color temperature

3000K - 6000K - 4000K

Luminous flux

2520Lm/m

IP degree

IP20

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI

>90


STRIP

Rotolo strip LED 5 metri

5 meters Roll strip-led


**EASY
DOMOTICA**
**Materiale**

Kapton senza silicone

Sorgente luminosa

120xLED/m SMD 2835

Potenza

24W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

3000K - 6000K - 4000K - BLU

Flusso luminoso

2520Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Material

Kapton without silicone

Light source

120xLED/m SMD 2835

Power

24W/m

Driver

DC24V constant voltage not included

Color temperature

3000K - 6000K - 4000K - BLU

Luminous flux

2520Lm/m

IP degree

25.000h ~ >15.000 on/off

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI


>80

CLASSE A+ CE EMC III

CLASSE A+ CE EMC III




	W/m	Lm/m	LED/m
STRIP24V-2835-240C 8031414871018	24W	2520 LM	240 LED
STRIP24V-2835-240F 8031414871001	24W	2520 LM	240 LED
STRIP24V-2835-240M 8031414871025	24W	2520 LM	240 LED

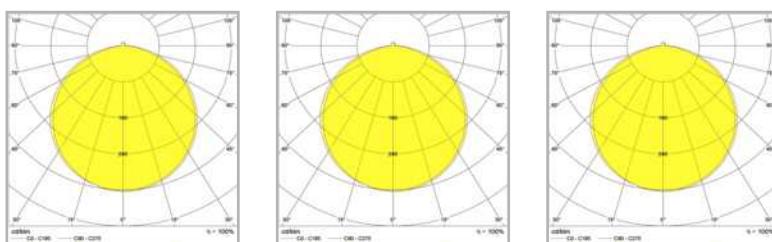PER UNA CORRETTA DISSIPAZIONE APPLICARE LA STRIP SU UN SUPPORTO D'ALLUMINIO
FOR CORRECT DISSIPATION FIX THE STRIP ON ALUMINIUM SUPPORT**FOTOMETRIA DEL PRODOTTO**

STRIP24V-2835-240C

STRIP24V-2835-240F

STRIP24V-2835-240M

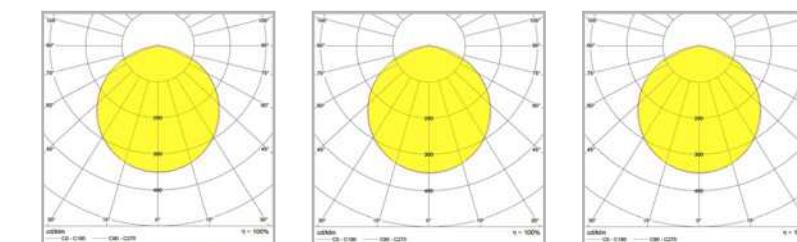Driver pag. 567**Controller pag. 574**PER UNA CORRETTA DISSIPAZIONE APPLICARE LA STRIP SU UN SUPPORTO D'ALLUMINIO
FOR CORRECT DISSIPATION FIX THE STRIP ON ALUMINIUM SUPPORT**FOTOMETRIA DEL PRODOTTO**

STRIP24V-2835-120C

STRIP24V-2835-120F

STRIP24V-2835-120M

	W/m	Lm/m	LED/m
STRIP24V-2835-120C 8031414871056	18W	2072 LM	120 LED
STRIP24V-2835-120F 8031414871032	18W	2072 LM	120 LED
STRIP24V-2835-120M 8031414871063	18W	2072 LM	120 LED
STRIP24V-2835-120BLU 8031414871049	18W	---	120 LED

Misure - Size**Misura taglio
cut - size****Driver pag. 567****Controller pag. 574**

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED


Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 2835

Potenza

12W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

3000K - 6000K - 4000K


Flusso luminoso

1260Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Material

Kapton without silicone

Light source

60xLED/m SMD 2835

Power

12W/m

Driver

DC24V constat voltage not included

Color temperature

3000K - 6000K - 4000K


Luminous flux

1260Lm/m

IP degree

IP20

Lifetime and on/off

50.000h >25.000 on/off

CRI

>80

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED


Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

14,4W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

Grado di protezione

IP20

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>80

**EASY
DOMOTICA**

**EASY
DOMOTICA**


CLASSE A+ CE IEC


CLASSE A+ CE IEC



		W/m	Lm/m	LED/m
STRIP24V-2835-60C 8031414871278	●	12W	1260LM	60 LED
STRIP24V-2835-60F 8031414871292	●	12W	1260LM	60 LED
STRIP24V-2835-60M 8031414871285	●	12W	1260LM	60 LED

Misure - Size


 Misura taglio
cut - size


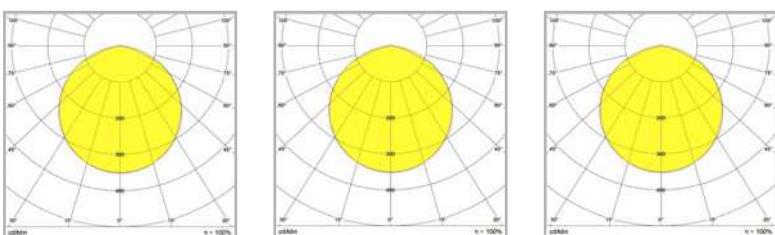
FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT


294



STRIP24V-5050-RGB 8031414871360	14,4W	60 LED
------------------------------------	-------	--------

Misure - Size


 Misura taglio
cut - size

Driver pag. 567
Controller pag. 574
FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT


295

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED


Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 2835

Potenza

12W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

3000K - 6000K - 4000K

Material

Kapton without silicone

Light source

60xLED/m SMD 2835

Power

12W/m

Driver

DC24V costant voltage not included

Color temperature

3000K - 6000K - 4000K

Luminous flux

1260 Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h >25.000 on/off

CRI

>85


STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED


Materiale

Kapton senza silicone

Sorgente luminosa

48xLED/m SMD 5050

Potenza

10W/m

Driver

DC24V tensione costante non incluso



CLASSE A+ CE EMC II

CLASSE A+ CE EMC II



W/m Lm/m LED/m

STRIP24V-2835-3D-60C 12W 1260LM 60 LED

STRIP24V-2835-3D-60F 12W 1260LM 60 LED

STRIP24V-2835-3D-60M 12W 1260LM 60 LED

Misure - Size


Misura taglio cut - size

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT

Driver pag. 567

Controller pag. 574

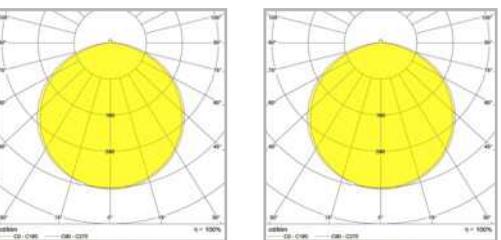

STRIP24V-2835-3D-60C

STRIP24V-2835-3D-60F

STRIP24V-2835-3D-60M



W/m Lm/m LED/m

STRIP24V-5050-3D-RGBW 10W 264 LM 48 LED

Misure - Size


Misura taglio cut - size

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT

Driver pag. 567

Controller pag. 574



STRIP24V-5050-3D-RGBW

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



EASY
DOMOTICA



Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

14,4W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

3000K - 6000K - 4000K



Flusso luminoso

1296Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Material

Kapton without silicone

Light source

60xLED/m SMD 5050

Power

14,4W/m

Driver

DC24V costant voltage not included

Color temperature

3000K - 6000K - 4000K



Luminous flux

1296Lm/m

IP degree

IP20

Lifetime and on/off

50.000h >25.000 on/off


CRI

>80

CLASSE A+ CE EMC



	W/m	Lm/m	LED/m
STRIP24V-5050-60C 8031414878420	14,4W	1296 LM	60 LED
STRIP24V-5050-60F 8031414876129	14,4W	1296 LM	60 LED
STRIP24V-5050-60M 8031414878741	14,4W	1296 LM	60 LED




[Driver pag. 567](#)

[Controller pag. 574](#)

FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF PRODUCT

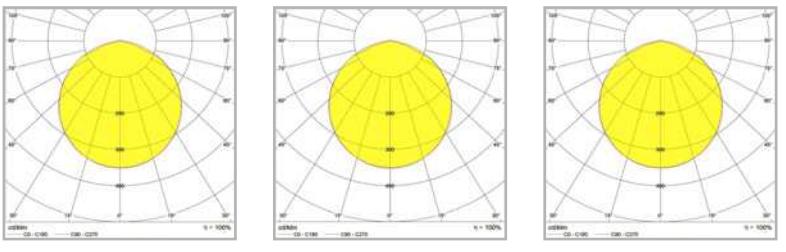

STRIP24V-5050-60C

STRIP24V-5050-60F

STRIP24V-5050-60M

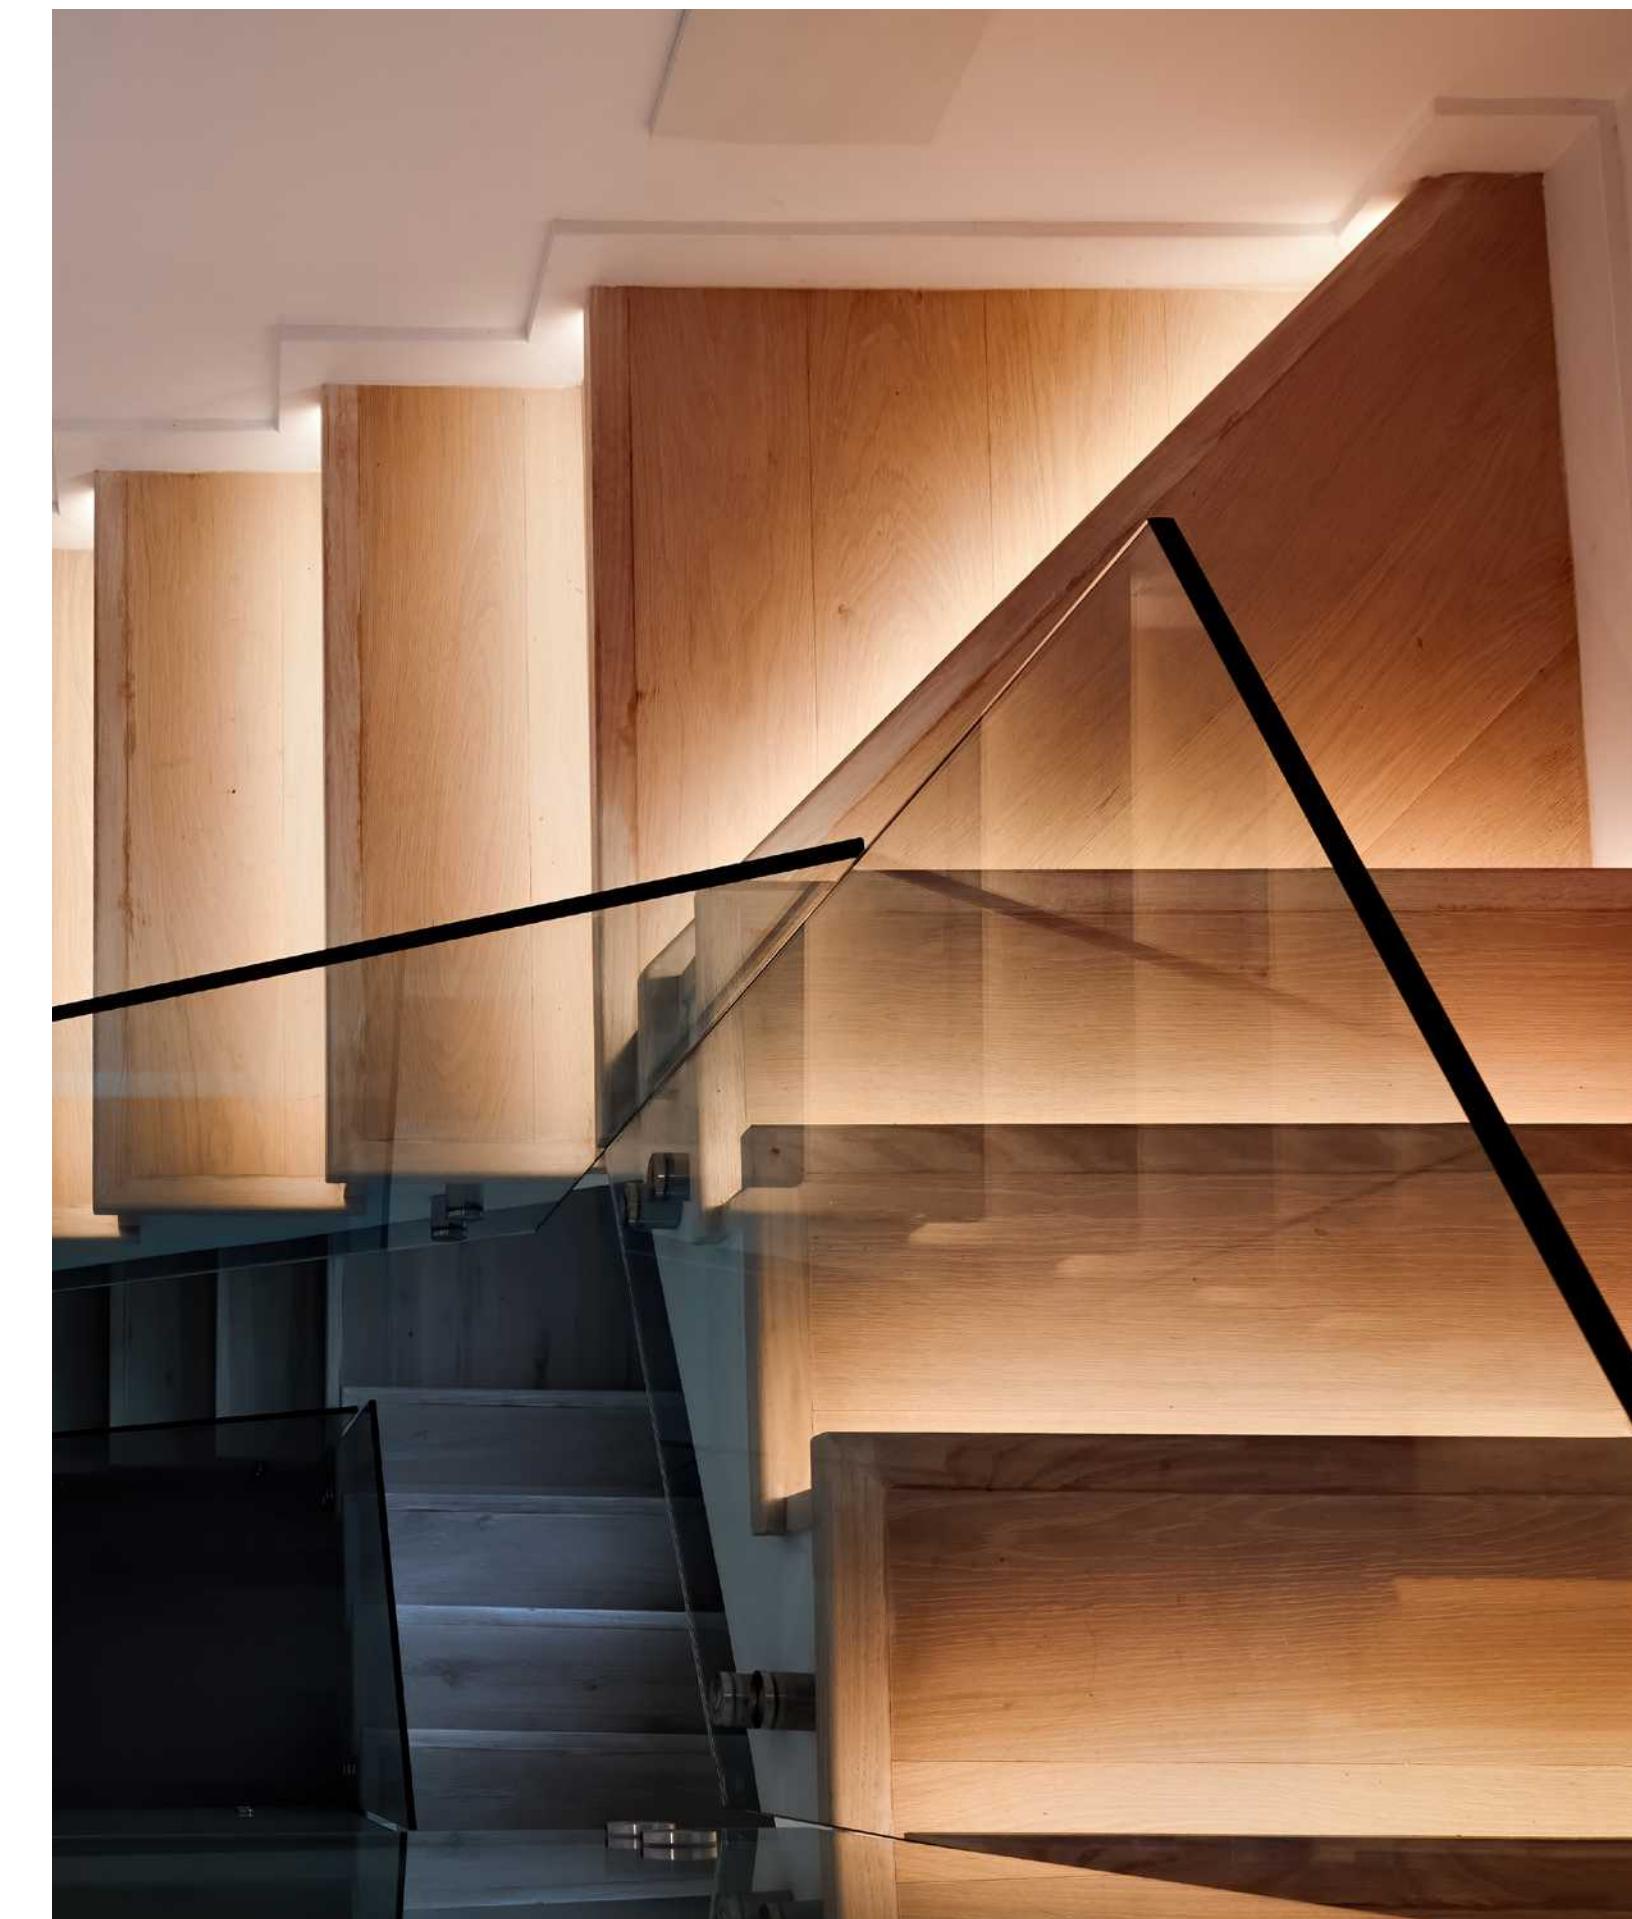

EASY
DOMOTICA

STRIP



Rotolo strip LED 5 metri

5 meters roll strip LED

Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

19,2W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

RGB + 4000K

+

Flusso luminoso

570Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>80

Material

Kapton without silicone

Light source

60xLED/m SMD 5050

Power

19,2W/m

Driver

DC24V constant voltage not included

Colour temperature

RGB + 4000K

+

Luminous flux

570Lm/m

IP degree

IP20

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI

>80

STRIP



Rotolo strip LED 5 metri

5 meters roll strip LED

Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

19,2W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

RGB

CCT

Flusso luminoso

500Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>80

EASY
DOMOTICA



CLASSE A CE EMC



CLASSE A CE EMC



	W/m	Lm/m	LED/m
STRIP24V-5050-RGBW 8031414871384	19,2W	570 LM	60 LED

Misure - Size




Misura taglio
cut - size



[Driver pag. 567](#)

[Controller pag. 574](#)


FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT



STRIP24V-5050-RGBW



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT



STRIP24V-5050-RGBCCT

	W/m	Lm/m	LED/m
STRIP24V-5050-RGBCCT 8031414871391	19,2W	500LM	60 LED

Misure - Size



Misura taglio
cut - size



[Driver pag. 567](#)

[Controller pag. 574](#)

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED

Materiale

Kapton senza silicone

Sorgente luminosa

120xLED/m SMD 2835

Potenza

24W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

Flusso luminoso

● 1000Lm/m ● 1000Lm/m ● 2000Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>85

Material

Kapton without silicone

Light source

120xLED/m SMD 2835

Power

24W/m

Driver

DC24V constat voltage not included

Colour temperature

Luminous flux

● 1000Lm/m ● 1000Lm/m ● 2000Lm/m

IP degree

IP20

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI

>85

STRIP

 Rotolo strip led 3 metri incluso
di alimentatore

 kit 3 meters roll strip LED with
driver included

Materiale

Kapton senza silicone

Sorgente luminosa

48xLED/m SMD 2835

Potenza

10W/m

Driver

36W - 24V DC incluso

Temperatura colore

3000K - 6000K - 4000K

Flusso luminoso

820Lm/m

Grado di protezione

IP20

Durata e on/off

25.000h ~ >12.500 on/off

CRI

>80

Material

Kapton without silicone

Light source

48xLED/m SMD 2835

Power

10W/m

Driver

36W - 24V DC included

Color temperature

3000K - 6000K - 4000K

Luminous flux

820Lm/m

IP degree

IP20

Lifetime and on/off

25.000h ~ >12.500 on/off

CRI

>80



CLASSE A+ CE EMC


CLASSE A+ CE EMC




	W/m	Lm/m	LED/m
STRIP24V-2835-CCT 8031414875795	24W	● 1000LM	120 LED
		● 2000LM	

Misure - Size


 Misura taglio
cut - size

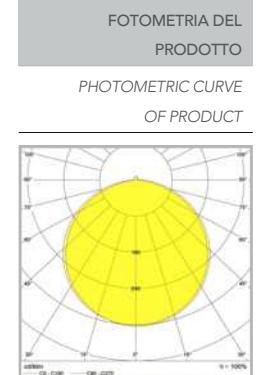Driver pag. 567
Controller pag. 574


STRIP24V-2835-CCT


FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT


STRIP24V-2835 KIT

	W/m	Lm/m	LED/m
STRIP24V-2835C-KIT 8031414871414	● 10W	820 LM	48 LED
STRIP24V-2835F-KIT 8031414871438	● 10W	820 LM	48 LED
STRIP24V-2835M-KIT 8031414871421	● 10W	820 LM	48 LED

 36W - 24V DC incluso
36W - 24V DC included

Misure - Size


 Misura taglio
cut - size


STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



Materiale

Kapton senza silicone

Sorgente luminosa

168xLED/m SMD 3838

Potenza

24W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

RGB



Grado di protezione

IP20

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>80

Material

Kapton without silicone

Light source

168xLED/m SMD 3838

Power

24W/m

Driver

DC24V constant voltage not included

Colour temperature

RGB



IP degree

IP20

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI

>80

STRIP

Rotolo strip led 3 metri incluso
di alimentatore

kit 3 meters roll strip LED with
driver included



Materiale

Kapton senza silicone

Sorgente luminosa

90LED SMD 5050

Potenza

21,6W

Driver

24W - 24V DC incluso

Temperatura colore



Grado di protezione

IP20

Durata e on/off

25.000h ~ >12.500 on/off

CRI

>80

EASY
DOMOTICA



	W/m	LED/m
STRIP24V-3838-168RGB 8031414877898	24W	168 LED

Misure - Size




Misura taglio
cut - size



FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT



STRIP24V-3838-168RGB


Driver pag. 567

Controller pag. 574



FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT



STRIP24V-5050RGB-KIT

Potenza totale 3m	Led totali 3m
Tot power 3m	Tot led 3m

STRIP24V-5050RGB-KIT 8031414871445	21,6W	90LED
---------------------------------------	-------	-------



24W - 24V DC incluso

24W - 24V DC included

Telecomando incluso

Remote control included



Controller RGB incluso

Controller RGB included

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



EASY
DOMOTICA



Materiale

Kapton con rivestimento in silicone

Sorgente luminosa

60xLED/m SMD 2835

Potenza

12W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

3000K - 6000K - 4000K



Flusso luminoso

1260Lm/m

Grado di protezione

IP67

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Material

Kapton with silicone cover

Light source

60xLED/m SMD 2835

Power

12W/m

Driver

DC24V constant voltage not included

Color temperature

3000K - 6000K - 4000K



Luminous flux

1260Lm/m

IP degree

IP67

Lifetime and on/off

50.000h >25.000 on/off

CRI

>80

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



EASY
DOMOTICA



Materiale

Kapton con rivestimento in silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

14,4W/m

Driver

DC24V constant voltage not included

Temperatura colore

3000K - 6000K - 4000K



Flusso luminoso

1296Lm/m

Grado di protezione

IP67

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Material

Kapton with silicone cover

Light source

60xLED/m SMD 5050

Power

14,4W/m

Driver

DC24V constant voltage not included

Color temperature

3000K - 6000K - 4000K



Luminous flux

1296Lm/m

IP degree

IP67

Lifetime and on/off

50.000h >25.000 on/off

CRI

>80

CLASSE A+ CE EMC III

CLASSE A+ CE EMC III




	W/m	Lm/m	LED/m
STRIP24V-2835IP67-60C 8031414871308	12W	1260 LM	60 LED
STRIP24V-2835IP67-60F 8031414871322	12W	1260 LM	60 LED
STRIP24V-2835IP67-60M 8031414871315	12W	1260 LM	60 LED

Misure - Size


Misura taglio
cut - size

FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF PRODUCT



STRIP24V-2835IP67-60C



STRIP24V-2835IP67-60F



STRIP24V-2835IP67-60M

Driver pag. 567

Controller pag. 574




	W/m	Lm/m	LED/m
STRIP24V-5050IP67-60C 80314148716143	14,4W	1296 LM	60 LED
STRIP24V-5050IP67-60F 80314148716174	14,4W	1296 LM	60 LED
STRIP24V-5050IP67-60M 80314148715150	14,4W	1296 LM	60 LED

Misure - Size


Misura taglio
cut - size

FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF PRODUCT



STRIP24V-5050IP67-60C



STRIP24V-5050IP67-60F



STRIP24V-5050IP67-60M

Driver pag. 567

Controller pag. 574

EASY
DOMOTICA

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



Materiale

Kapton con rivestimento in silicone

Material

Kapton with silicone cover

Sorgente luminosa

60xLED/m SMD 5050

Light source

60xLED/m SMD 5050

Potenza

14,4W/m

Power

14,4W/m

Driver

DC24V tensione costante non incluso

Driver

DC24V constant voltage not included

Temperatura colore

RGB

Color temperature

RGB

Grado di protezione

IP67

IP degree

IP67

Durata e on/off

50.000h ~ >25.000 on/off

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI

>80

CRI

>80

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



EASY
DOMOTICA

Materiale

Kapton con rivestimento in silicone

Material

Kapton with silicone cover

Sorgente luminosa

60xLED/m SMD 5050

Light source

60xLED/m SMD 5050

Potenza

19,2W/m

Power

19,2W/m

Driver

DC24V tensione costante non incluso

Driver

DC24V constant voltage not included

Temperatura colore

RGB + 4000K

Colour temperature

RGB + 4000K

Flusso luminoso

570Lm/m

Luminous flux

570Lm/m

Grado di protezione

IP68

IP degree

IP68

Durata e on/off

50.000h ~ >25.000 on/off

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI

>80

CRI

>80



W/m

LED/m

STRIP24V-5050RGB-IP67
8031414871377

14,4W

60 LED

Misure - Size




Misura taglio
cut - size



FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT



STRIP24V-5050RGB-IP67

Driver pag. 567

Controller pag. 574

W/m

Lm/m

LED/m

STRIP24V-5050RGBW-IP68
8031414871407

19,2W

570LM

60 LED

Misure - Size




Misura taglio
cut - size



FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT



STRIP24V-5050RGBW-IP68


Driver pag. 567

Controller pag. 574

NEON FLEX



EASY
DOMOTICA

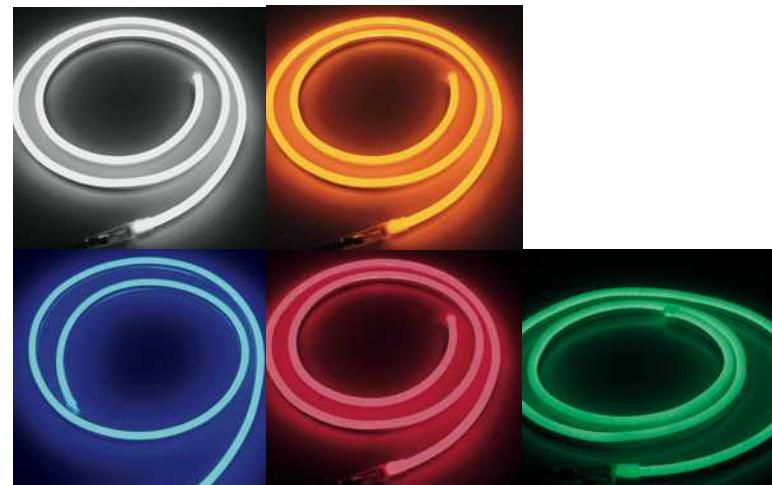

Rotolo 20 metri striscia led ultraflessibile
in silicone

20 meters roll extra flexible led line in silicone

Materiale

Silicone

Sorgente luminosa

140xLED/m SMD 2835

Potenza

8W/m

Driver

DC24V (8,3A)

tensione costante non incluso

Temperatura colore

5000K - BLU - GIALLO - ROSSO - VERDE

Flusso luminoso

344Lm/m

Grado di protezione

IP65

Durata e on/off

25.000h - >15.000 on/off

CRI

>80

Material

Silicone

Light source

140xLED/m SMD 2835

Power

8W/m

Driver

DC24V (8,3A)

constant voltage not included

Colour temperature

5000K - BLUE - YELLOW - RED - GREEN

Luminous flux

344Lm/m

IP degree

IP65




Lifetime and on/off

25.000h - >15.000 on/off

CRI

>80

ACCESSORI

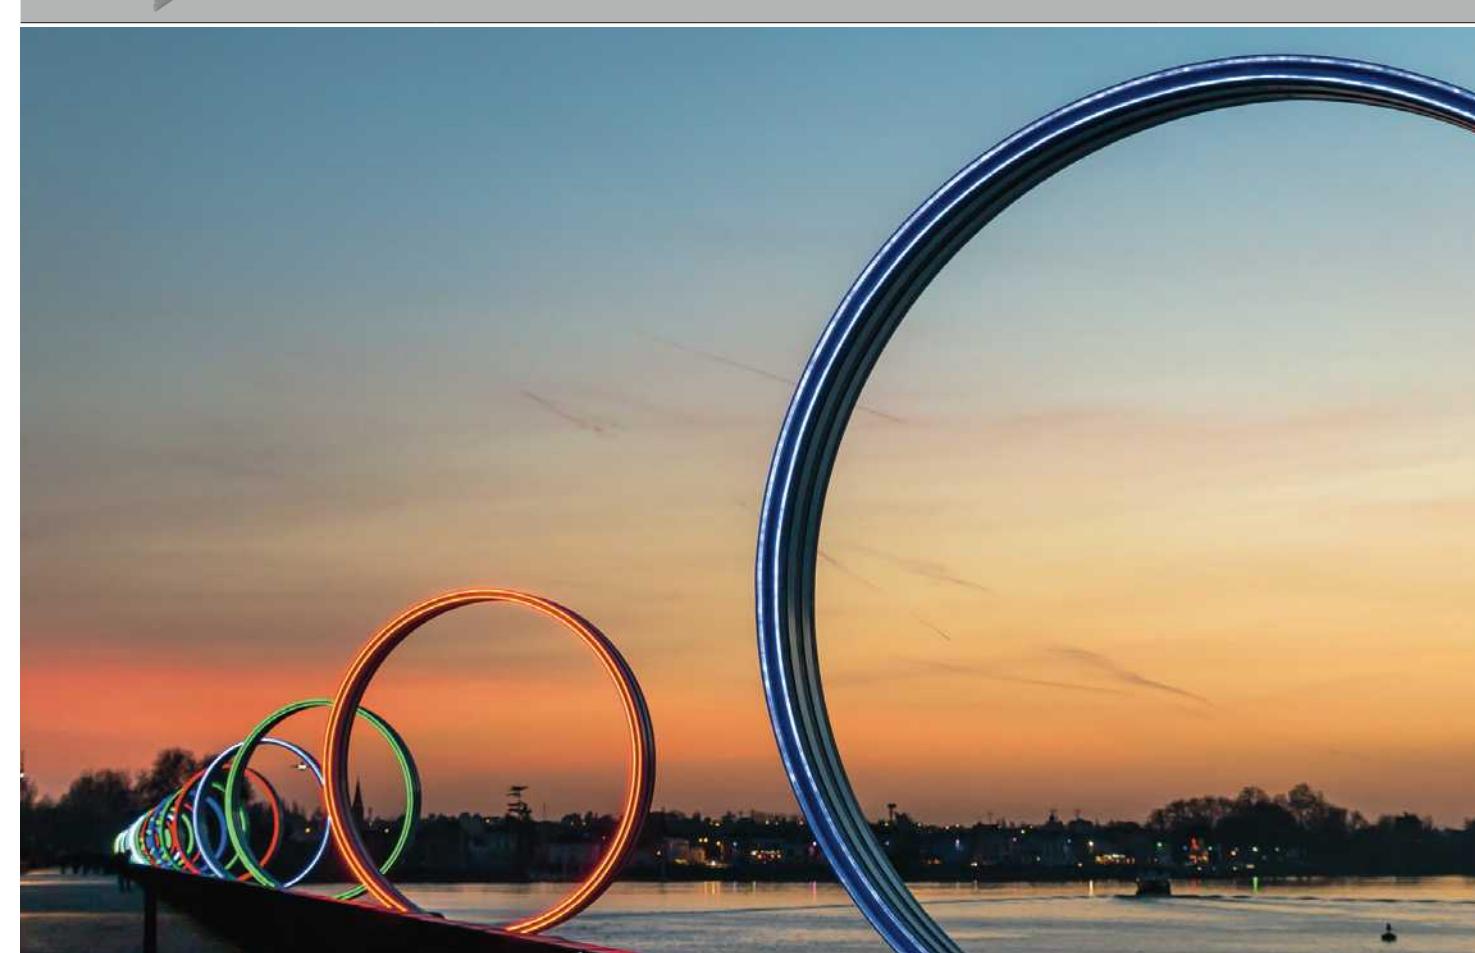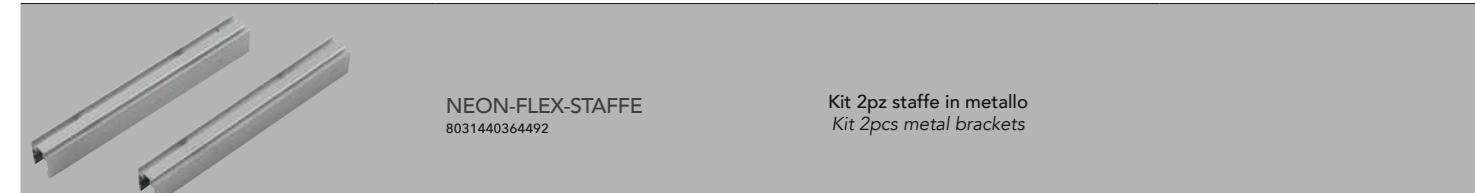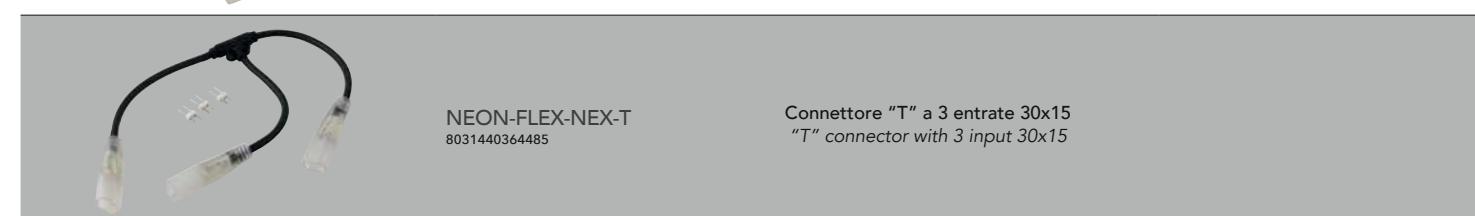

CLASSE A CE III

W/m Lm/m

NEON-FLEX-BIANCO
8031440361842

8W 344LM

NEON-FLEX-BLU
8031440364454

8W

NEON-FLEX-GIALLO
8031440364515

8W

NEON-FLEX-ROSSO
8031440364560

8W

NEON-FLEX-VERDE
8031440364546

8W

Misure - Size


Misura taglio

Driver pag. 567

Controller pag. 574

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT



NEON-FLEX-BIANCO

IN SIGN



Kit 20 pz moduli LED

Materiale

PC

Sorgente luminosa

3xLED SMD 5050

Driver

DC12V tensione costante non incluso

Temperatura colore

6000K

Durata e on/off

50.000 h ~ >25.000 on/off

Angolo di luce

160°

CRI

>80

Kit 20 pcs LED module

Material

PC

Light source

3xLED SMD 5050

Driver

DC12V constat voltage not included

Colour temperature

6000K

Lifetime and on/off

50.000 h ~ >25.000 on/off

Beam angle

160°

CRI

>80

IN SIGN



Kit 20 pz moduli LED

Materiale

PC

Sorgente luminosa

3xLED SMD 5050

Driver

DC12V tensione costante non incluso

Temperatura colore

6000K R G B +

Durata e on/off

50.000 h ~ >25.000 on/off

Angolo di luce

120°

CRI

>80

Kit 20 pcs LED module

Material

PC

Light source

3xLED SMD 5050

Driver

DC12V constat voltage not included

Colour temperature

6000K R G B +

Lifetime and on/off

50.000 h ~ >25.000 on/off

Beam angle

120°

CRI

>80

INTEC



EASY
DOMOTICA




LED-IN SIGN-F-LENS
8031414871155

1,2W- 120 Lm



Misure - Size



dimensioni in mm - size mm

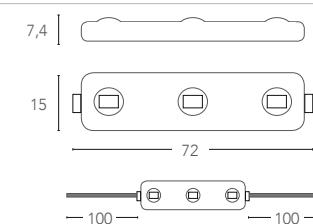

KIT 20pz CON CAVO 10CM
KIT 20pcs WITH CABLE 10CM

[Driver pag. 567](#)

[Controller pag. 574](#)

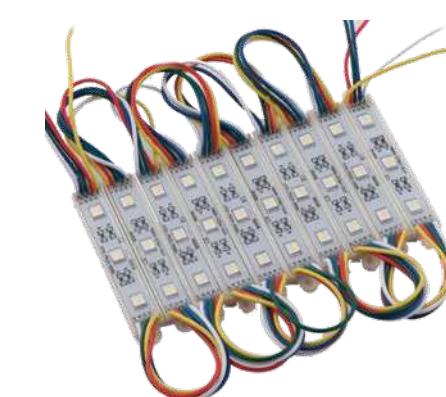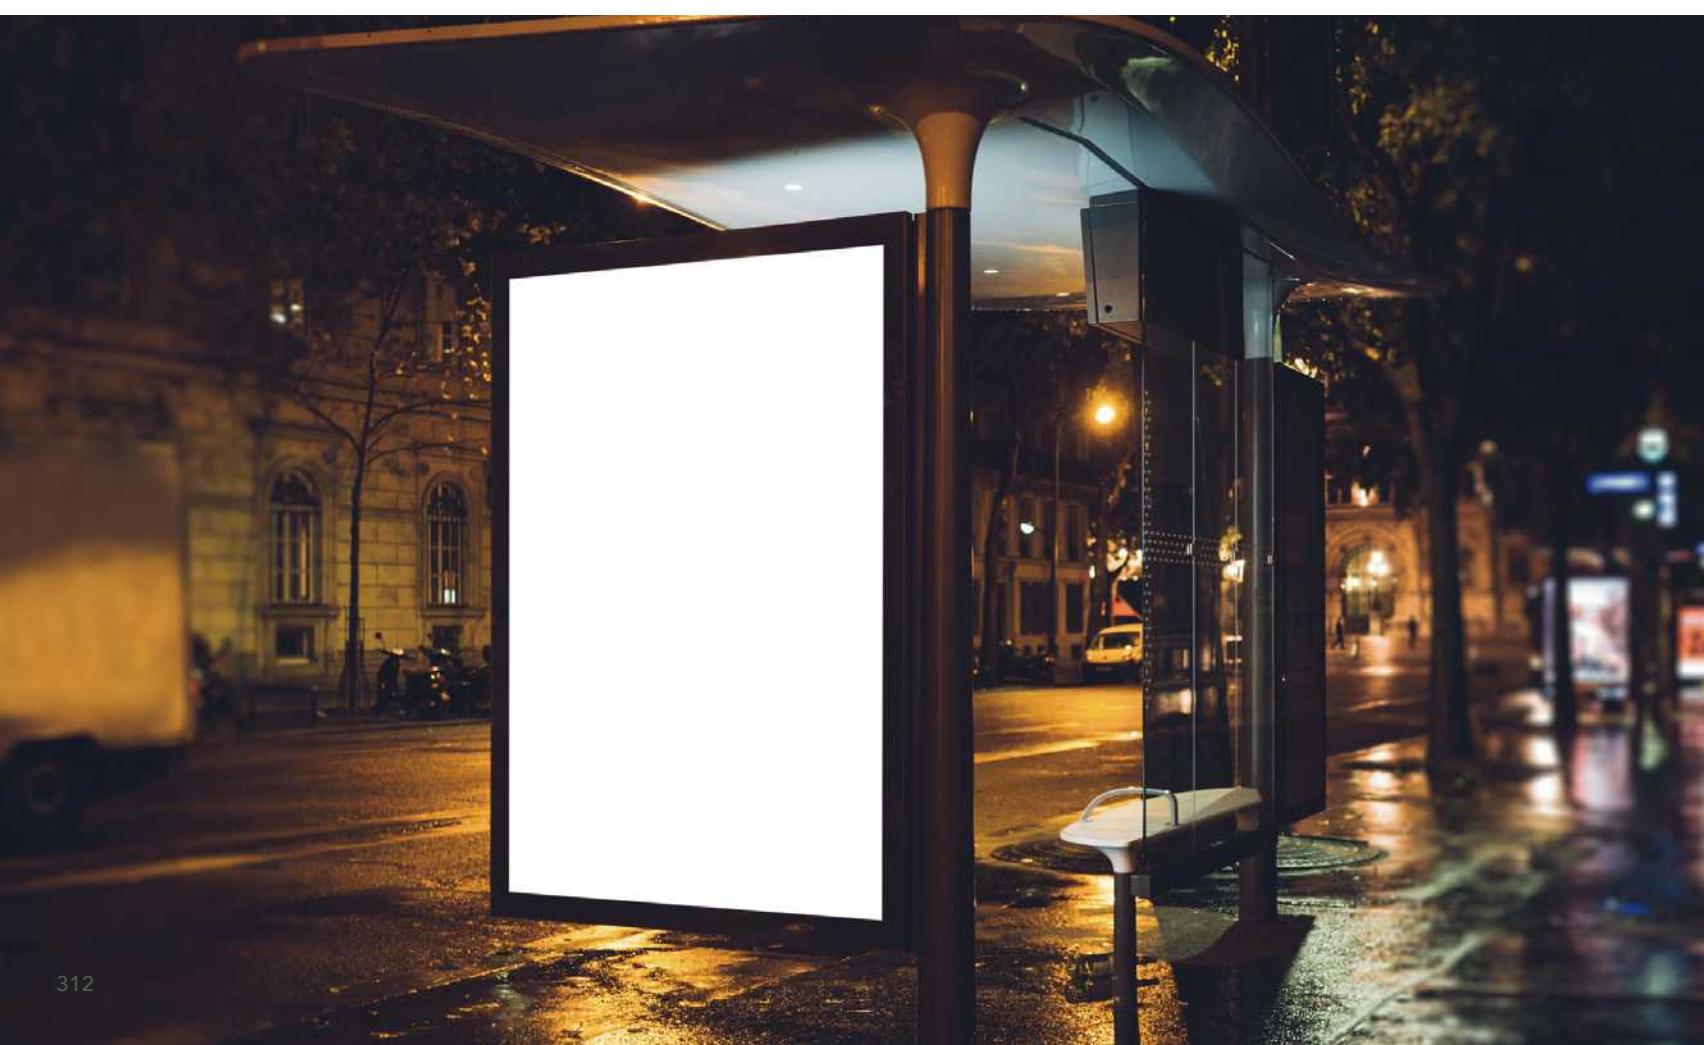


LED-IN SIGN-RGBW
8031414862955




0,96W DC12V

Misure - Size

dimensioni in mm - size mm

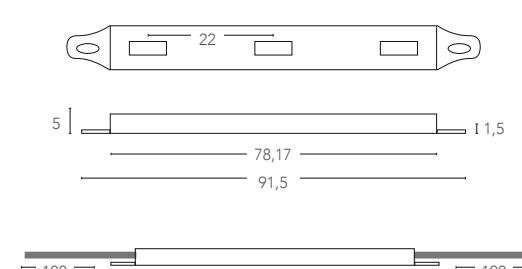

KIT 20pz CON CAVO 10CM
KIT 20pcs WITH CABLE 10CM

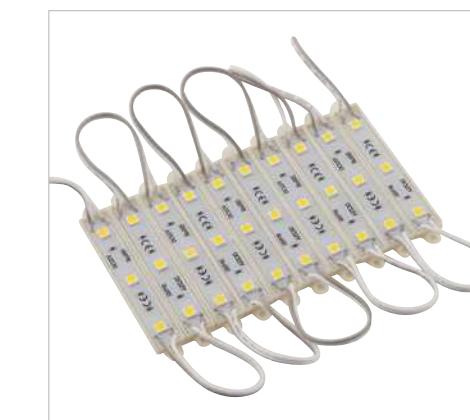


LED-IN SIGN-F
8031414862979



0,72W DC12V 72 Lm

Misure - Size

dimensioni in mm - size mm

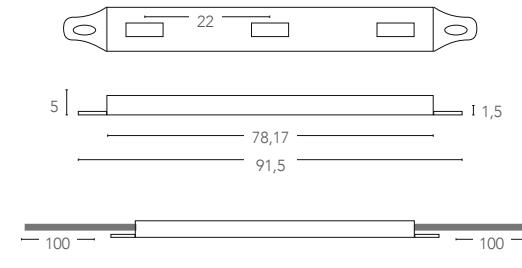

KIT 20pz CON CAVO 10CM
KIT 20pcs WITH CABLE 10CM

[Driver pag. 567](#)

[Controller pag. 574](#)

TAYLOR



Kit 12 pezzi luci LED fuga piastrelle

LED 12 pcs set for tiles drain

Materiale

PC

Sorgente luminosa

LED SMD

Potenza

12x0,275W

Driver

incluso

Temperatura colore

4000K

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

Material

PC

Light source

LED SMD

Power

12x0,275W

Driver

included

Color temperature

4000K

Lifetime and on/off

25.000 h ~ >10.000 on/off

Beam angle

120°

CRI

>80




LED-TAYLOR-KIT NERO
8031440061278

12X0,275W

60 LM

Misure - Size

dimensioni in mm - size mm

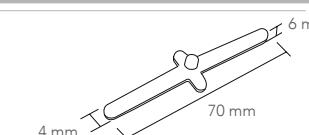

Accessori inclusi
Included accessories



STRIP



Strip LED comando touch con attacco USB

LED strip light with switch touch control and USB connection

Materiale

Kapton con rivestimento in silicone

Sorgente luminosa

15xLED SMD 5050

Colore



Grado di protezione

IP20

Durata e on/off

25.000h ~ >15.000 on/off

CRI

>80

Material

Kapton with silicone cover

Light source

15xLED SMD 5050

Color



IP degree

IP20

Lifetime and on/off


25.000h ~ >15.000 on/off

CRI

>80



TOUCH CONTROL

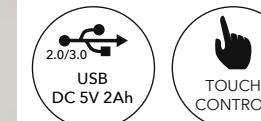

Potenza totale 80cm
Tot power 80cm

STRIP-SURROUND
8031440354202

3,5W

Misure - Size



cavo 1m incluso
included 1m cable




ETERNA

Plafoniera LED in policarbonato bianca batteria Ni-Cd e funzione d'emergenza combinata e permanente

Ceiling LED lamp in PC with Ni-Cd battery and double emergency function maintain/non-maintain



Sorgente luminosa
Light source

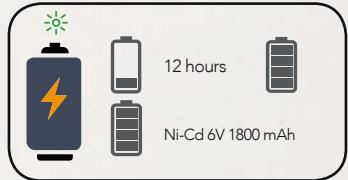

Funzione "Maintain" sempre accesa
Maintain function always on



Funzione "Non-maintain" emergenza
Non-maintain function only emergency



ETERNA

Materiale

PC

Colore

Bianco

Sorgente luminosa

LED SMD 20W - 16W

Driver

incluso

Batteria per emergenza

Inclusa Ni-Cd 6V 1800 mAh

Material

PC

Colour

White

Light source

LED SMD 20W - 16W

Driver

included

Battery for emergency light

included Ni-Cd 6V 1800 mAh

Color temperature

4000K



Lifetime and on/off

30.000 h - >15.000 on/off

Beam angle


120°

CRI

>80

CLASSE

A

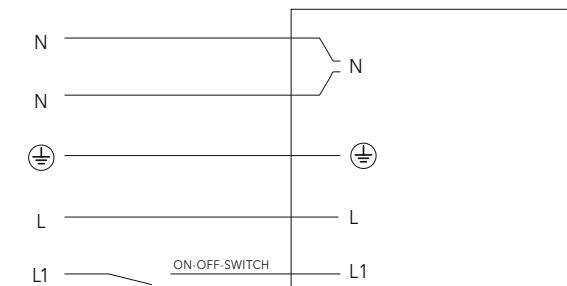

LED-ETERNA-120
8031440358538

20W


1160 Lm

FOTOMETRIA DEL
PRODOTTO AC




3H 200 Lm

PHOTOMETRIC CURVE
OF AC PRODUCT

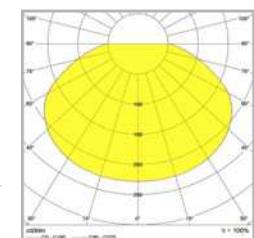

LED-ETERNA-120

Misure - Size
dimensioni in mm - size mm



LED-ETERNA-54
8031440358521

16W


900 Lm

FOTOMETRIA DEL
PRODOTTO AC




3H 120 Lm

PHOTOMETRIC CURVE
OF AC PRODUCT

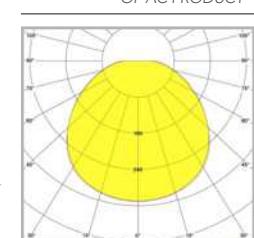

LED-ETERNA-54

Misure - Size
dimensioni in mm - size mm



HELP EXIT

Lampade a LED multiuso: emergenza a plafoniera, emergenza a incasso
o uscita di emergenza


Multipurpose LED lamp surface mount, recessed mount
or recessed emergency exit mount version




Sorgente luminosa
Light source



Funzione "Maintain" sempre accesa
Maintain function always on



Funzione "Non-maintain" emergenza
Non-maintain function only emergency



Materiale

PC

Colore

Bianco

Sorgente luminosa

LED SMD 4W

Driver

integrato

Batteria per emergenza

Included 2x 7.4V 1.8Ah Li-ion 3h

Temperatura colore

4000K

Material

PC

Colour

White

Light source

LED SMD 4W

Driver

Built-in

Battery for emergency light

Included 2x 7.4V 1.8Ah Li-ion 3h

Color temperature



4000K

LED-HELP-EXIT
8031414876310

4W


3H 400 Lm

Misure - size
dimensioni in mm - size mm

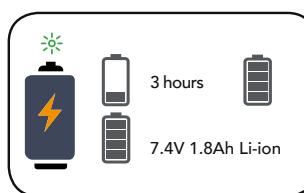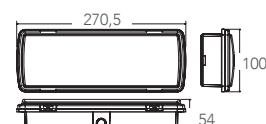

HELP-EXIT-KIT
8031414876327

KIT INCASSO CORNICE E MOLLE
KIT RECESSED WITH FRAME AND SPRING



HELP-EXIT-FLAG
8031414877331

KIT BANDIERA INCLUSO ADESIVI
EMERGENCY FLAG WITH STICKERS KIT



BOLT HELP

Incasso segnapassi alloggio in cassetta di derivazione 503 con placchetta intercambiabile bianca o nickel funzione d'emergenza combinata e permanente

Down wall-light for recess box 503 built-in LED with replaceable buckle white or nikel finish and double emergency function maintain or non-maintain.



Sorgente luminosa
Light source



Funzione "Maintain" sempre accesa
Mantain function always on



Funzione "Non-maintain" emergenza
No-mantain function only emergency

**Materiale**

Policarbonato + acciaio

Material

Polycarbonate + stainless steel

Colore

Bianco o nikel

Colour

White or Nikel

Driver

integrato

Driver

Built-in

Batteria per emergenza

Inclusa Li-ion 3,7V 700 mAh

Emergency battery

included Li-ion 3,7V 700 mAh

Sorgente luminosa

LED SMD 3W

Light source

LED SMD 3W

Temperatura colore

4000K

**Color temperature**

4000K

Flusso luminoso

200 Lm

Luminous flux

200 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80

INC-BOLT-503HP
8031414866243




3W 200 Lm



3H 150 Lm

Misure - size

dimensioni in mm - size mm

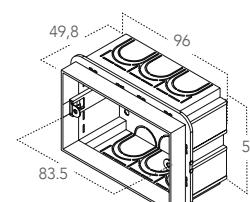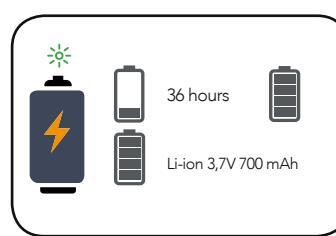


Scatola derivazione 503 non inclusa
Junction box not included

Accessori inclusi
Accessory included

2x placchette frame

2x staffette bracket



CLASSE A+ CE EMC

HELP 503

Lampade di emergenza LED in policarbonato batteria Li-ion incasso cassetta di derivazione 503.

Emergency LED lamp in PC with Li-ion battery, fit with recess box 503.



Sorgente luminosa
Light source


Materiale

Policarbonato

Colore

Bianco

Driver

integrale

Batteria per emergenza

Inclusa Li-ion 3.7V 700mA

Sorgente luminosa

LED SMD 1W

Temperatura colore

4000K

Flusso luminoso

80 Lm

Durata e on/off

25.000 h > 10.000 on/off

Angolo di luce

120°

CRI

>80

Material

Policarbonato

Colour

White

Driver

Built-in

Emergency battery


included Li-ion 3.7V 700mA

LED-HELP-503
8031414862573


1W

3H 80 Lm

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm


Light source

LED SMD 1W

Color temperature


4000K

Luminous flux


80 Lm

Lifetime and on/off

25.000 h > 10.000 on/off

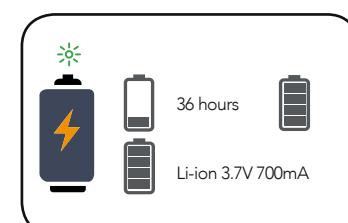

Li-ion 3.7V 700mA



Scatola derivazione 503 non inclusa
Junction box not included



HELP 511

Lampade di emergenza LED in policarbonato batteria Ni-Cd

Emergency LED lamp in PC with Ni-Cd battery



Sorgente luminosa
Light source


Materiale

Policarbonato

Colore

Bianco

Driver

integrale

Batteria per emergenza

Inclusa Li-ion 7.4V 1200mA

Sorgente luminosa

LED SMD 4W

Color temperature

4000K

Luminous flux

180 Lm

Lifetime and on/off

25.000 h > 10.000 on/off

Angolo di luce

100°

CRI

>80

Material

Policarbonato

Colour

White

Driver

Built-in

Emergency battery

included Li-ion 7.4V 1200mA

Light source

LED SMD 4W

Color temperature

4000K

Luminous flux

180 Lm

Lifetime and on/off

25.000 h > 10.000 on/off

Beam angle

100°

CRI

>80

LED-HELP-511
8031414862566

4W

3H 180 Lm

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessory included

Adesivo - stickers



Foro - cut out
Scatola derivazione
recess box hole
dimensioni in mm - size mm



COMPASS

Applique alluminio doppia emissione orientabile colore antracite
Anthracite aluminium wall lamp with double orientable light emission



Sorgente luminosa
Light source



COMPASS

Materiale

Alluminio

Colore

Antracite

Driver

incluso

Sorgente luminosa

LED SMD 10W

Temperatura colore



Flusso luminoso

470 Lm

Durata e on/off

30.000 h - >15.000 on/off

Angolo di luce

↑ 110° + ↓ 110°

CRI

>80

Grado IK

IK08

Material

Aluminium

Colour

Anthracite

Driver

included

Light source

LED SMD 10W

Color temperature



Luminous flux

470 Lm

Lifetime and on/off

30.000 h - >15.000 on/off

Beam angle

↑ 110° + ↓ 110°

CRI

>80

IK degree



IK08



LED-W-COMPASS-INT
8031414870158

10W

Misure
dimensioni in mm

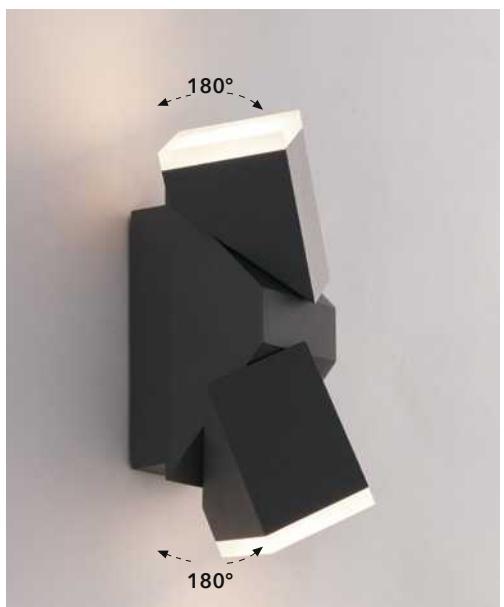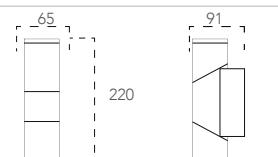

CONTROL SYSTEM EASY INSTALLATION



VOICE CONTROL ALEXA E GOOGLE HOME



COMPACT

Applique a LED in alluminio colore antracite con diffusore in PC

Anthracite aluminium LED wall lamp and PC diffuser



IP54



LED SMD

Sorgente luminosa
Light source

DETROIT

Applique a LED in alluminio nero diffusore in policarbonato

Aluminium LED wall lamp black finish with PC shade

Sorgente luminosa
Light source**Materiale**

Alluminio + policarbonato

Material

Aluminium + polycarbonate

Colore

Antracite

Colour

Anthracite

Driver

incluso

Driver

included

Sorgente luminosa

LED SMD 18W

Light source

LED SMD 18W

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

1200 Lm

Luminous flux

1200 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80

Grado IK



IK07

IK degree

IK07

LED-W-COMPACT
8031414867110

18W

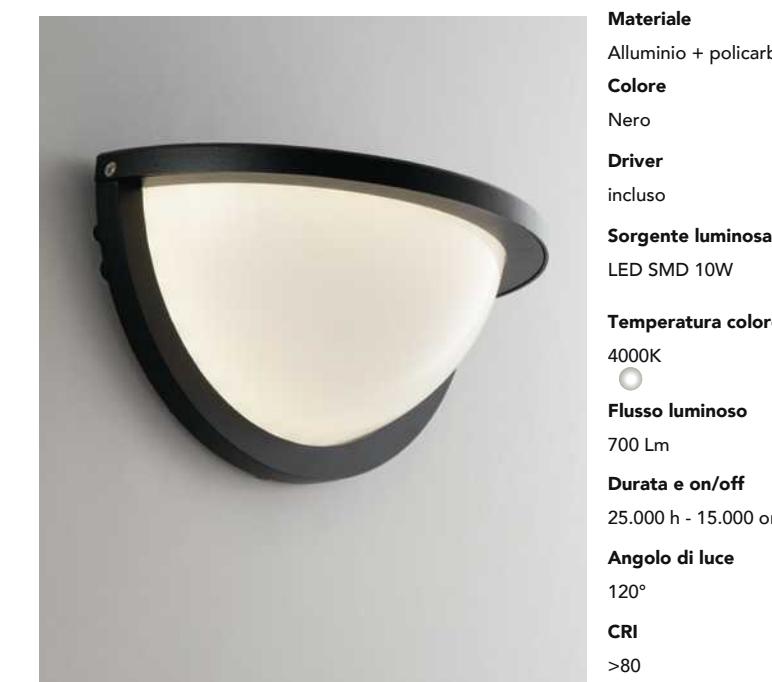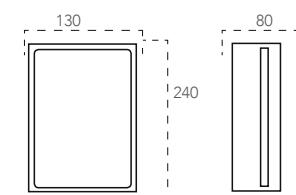Misure - size
dimensioni in mm - size mm**Materiale**

Alluminio + policarbonato

Material

Aluminium + polycarbonate

Colore

Nero

Colour

Black

Driver

incluso

Driver

included

Sorgente luminosa

LED SMD 10W

Light source

LED SMD 10W

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

700 Lm

Luminous flux

700 Lm

Durata e on/off

25.000 h - 15.000 on/off

Lifetime and on/off

25.000 h - 15.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80

Grado IK

IK07

IK degree

IK07

LED-W-DETROIT-AP
8031414862290


10W

Misure - size
dimensioni in mm - size mm

AMON

Applique a LED in alluminio goffrato bianco o nero

Aluminium LED wall lamp embossed white or black finish

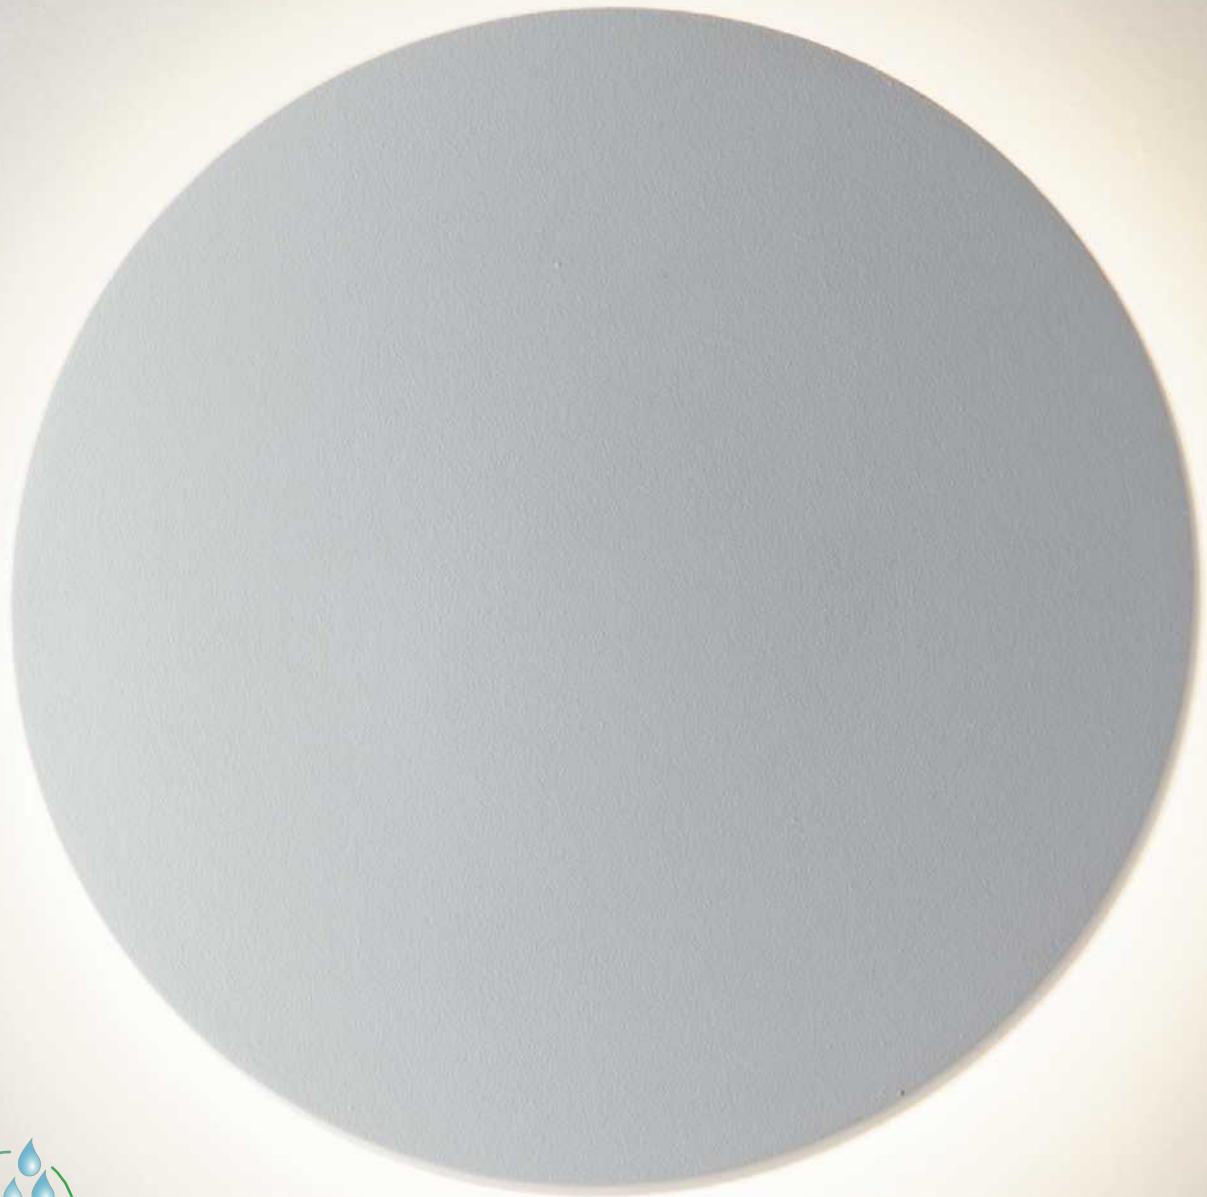Sorgente luminosa
Light source

AMON

Materiale

Alluminio

Colore

Goffrato bianco - goffrato nero

Driver

incluso

Sorgente luminosa

LED SMD 6W - 9W

Temperatura colore

3000K - 4000K



Flusso luminoso

360Lm - 540Lm

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

360° backlight

CRI

>80

Grado IK

IK08

Material

Aluminium

Colour

Embossed white - embossed black

Driver

included

Light source

LED SMD 6W - 9W

Color temperature

3000K - 4000K



Luminous flux

360Lm - 540Lm

Lifetime and on/off

25.000 h - >15.000 on/off

Beam angle

360° backlight

CRI

>80

IK degree

IK08

LED-W-AMON-S NERO

8031414866939

6W - 360 Lm

LED-W-AMON-S BCO

8031414866946

6W - 360 Lm

LED-W-AMON-SC BCO


8031414876723

6W - 360 Lm



Misure - size

dimensioni in mm - size mm



LED-W-AMON-M NERO

8031414867158

9W - 540 Lm

LED-W-AMON-M BCO


8031414867165

9W - 540 Lm

LED-W-AMON-MC BCO

8031414876709

9W - 540 Lm



Misure - size


dimensioni in mm - size mm

Ø 180

40

STEALTH

Applique a LED in alluminio goffrato bianco o nero
Aluminium LED wall lamp embossed white or black

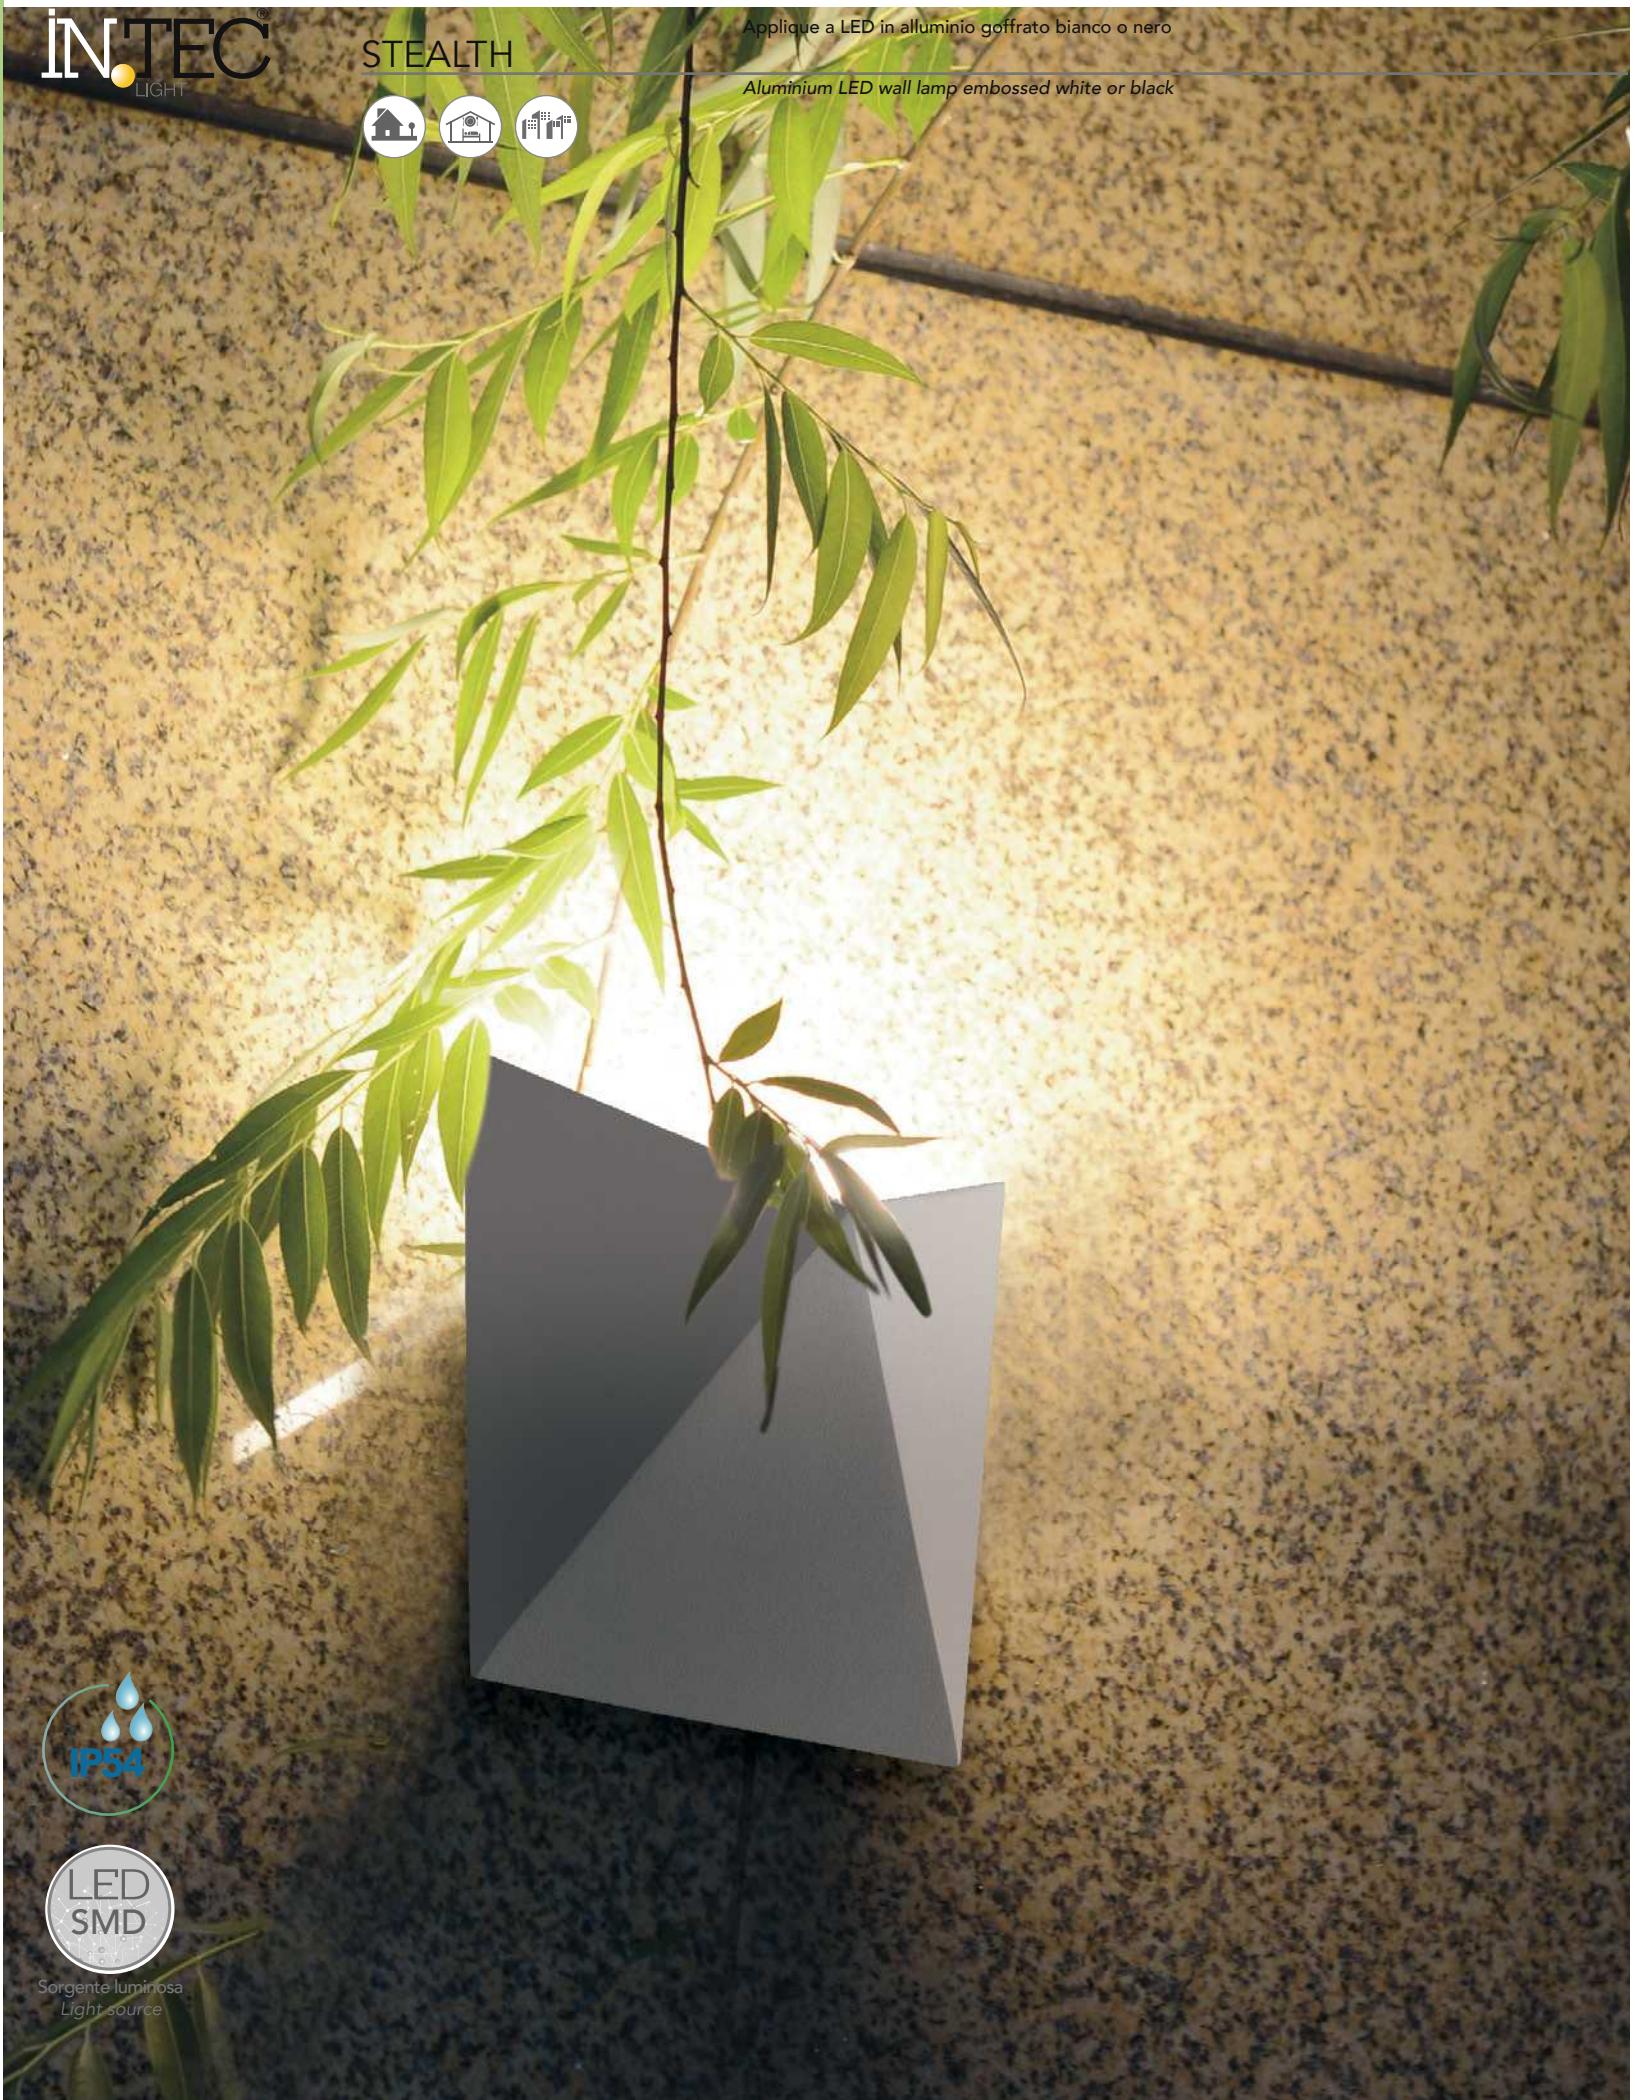

Sorgente luminosa
Light source

STEALTH

Materiale

Alluminio

Colore

Goffrato bianco - goffrato nero

Driver

incluso

Sorgente luminosa

LED SMD 7W

Temperatura colore

4000K



Flusso luminoso

420 Lm

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK07

Material

Aluminium

Colour

Embossed white - embossed black

Driver

included

Light source

LED SMD 7W

Color temperature

4000K



Luminous flux

420 Lm

Lifetime and on/off

25.000 h - >15.000 on/off

Beam angle

120°

CRI

>80


IK degree

IK07

LED-W-STEALTH NER
8031414866953

7W



Misure - size
dimensioni in mm - size mm



LED-W-STEALTH BCO
8031414866960

7W

Misure - size
dimensioni in mm - size mm

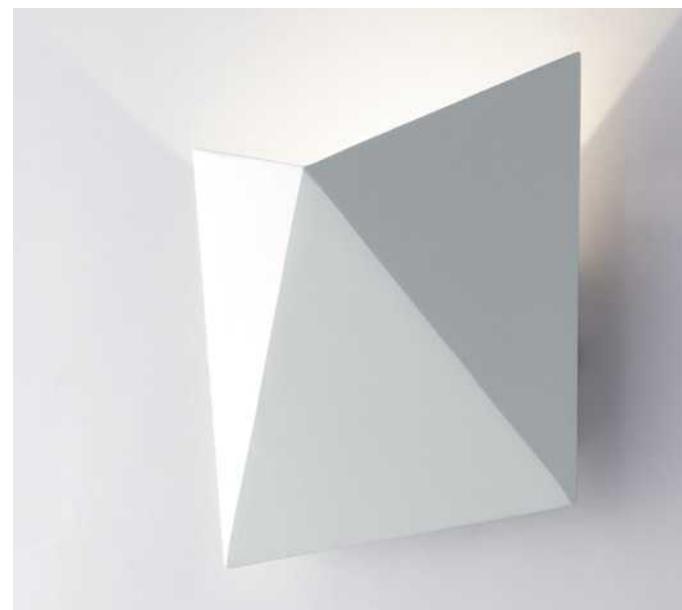

MERCURY



Luce biemissione
Biemission light

LED SMD

Sorgente luminosa
Light source

IP54



Applique a LED in alluminio bianco goffrato

Aluminium LED wall lamp embossed white finish

GAMMA




Luce biemissione
Biemission light

LED SMD

Sorgente luminosa
Light source

IP54

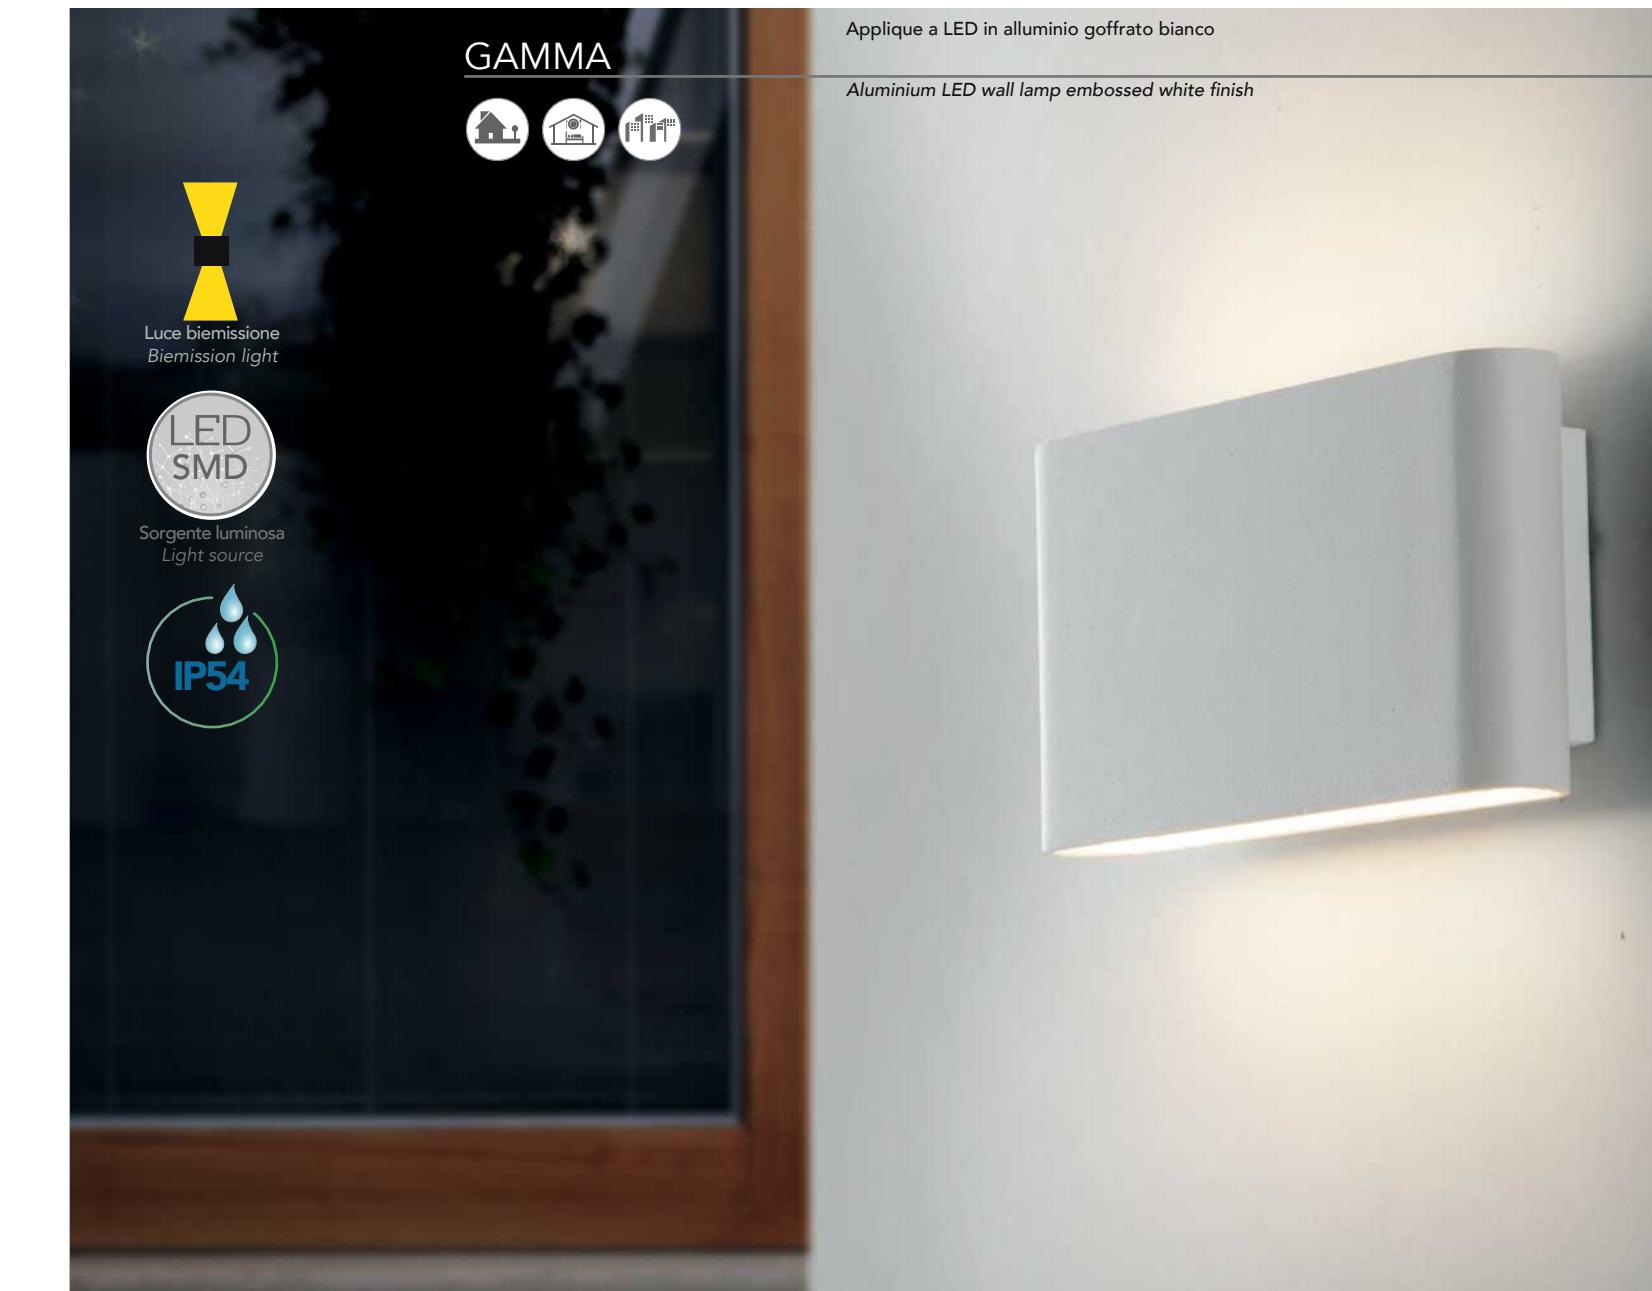

Applique a LED in alluminio goffrato bianco

Aluminium LED wall lamp embossed white finish

**Materiale**

Alluminio

Material

Aluminium

Colore

Goffrato bianco

Colour

Embossed white

Driver

incluso

Driver

included

Sorgente luminosa

LED SMD 6W

Light source

LED SMD 6W

Temperatura colore

3000K

Color temperature

3000K

Flusso luminoso

630 Lm

Luminous flux

630 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

↑ 120° + ↓ 120°

Beam angle

↑ 120° + ↓ 120°

CRI

>80

CRI

>80

Grado IK

IK07

IK degree


IK07

LED-W-MERCURY/5W
8031434091212

6W

Misure - size

dimensioni in mm - size mm

**Materiale**

Alluminio

Material

Aluminium

Colore

Goffrato bianco

Colour

Embossed white

Driver

incluso

Driver

included

Sorgente luminosa

LED SMD 2X5W

Light source

LED SMD 2X5W

Temperatura colore

3000K

Color temperature

3000K

Flusso luminoso

1080 Lm

Luminous flux

1080 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

↑ 120° + ↓ 120°

Beam angle

↑ 120° + ↓ 120°

CRI

>80

CRI

>80

Grado IK

IK07

IK degree


IK07

LED-W-GAMMA/10W
8031434041217

2X5W

Misure - size

dimensioni in mm - size mm

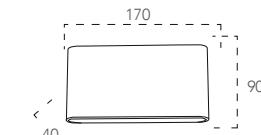

MIURA

Applique a LED in alluminio bianco goffrato ultrasottile

Ultrathin aluminium LED wall lamp

Luce biemissione
Biemission lightSorgente luminosa
Light source

IP54

**Materiale**

Alluminio

Material

Aluminium

Colore

Goffrato bianco

Colour

Embossed white

Driver

incluso

Driver

included

Sorgente luminosa

LED SMD 2X3W

Light source

LED SMD 2X3W

Temperatura colore

3000K

Color temperature

3000K

Flusso luminoso

520 Lm

Luminous flux

520 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

↑ 110° + ↓ 110°

Beam angle

↑ 110° + ↓ 110°

CRI

>80

CRI

>80

Grado IK


IK07

IK degree

IK07

LED-W-MIURA/6W
8031440351447

2X3W

Misure - size
dimensioni in mm - size mm

Applique a LED in alluminio colore antracite diffusore in policarbonato

Aluminium LED wall lamp anthracite colour, shade in PC

Materiale

Alluminio + policarbonato

Material

Aluminium + polycarbonate

Colore**Colour**

Goffrato bianco

Embossed white

Driver**Driver**

incluso

included

Sorgente luminosa

LED SMD 12W

Light source

LED SMD 12W

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

800 Lm

Luminous flux

800 Lm

Durata e on/off

25.000 h - >12.500 on/off

Lifetime and on/off

25.000 h - >12.500 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80

Grado IK

IK07

IK degree

IK07



CLASSE A CE ROHS

BIOME




Applique a LED in alluminio goffrato bianco o nero
Aluminium LED wall lamp embossed white or black finish

Materiale	Material
Alluminio	Aluminium
Colore	Colour
Goffrato bianco - goffrato nero	Embossed white - embossed black
Driver	Driver
incluso	included
Sorgente luminosa	Light source
LED COB 2X3,5W	LED COB 2X3,5W
Temperatura colore	Color temperature
4000K	4000K
Flusso luminoso	Luminous flux
540 Lm	540 Lm
Durata e on/off	Lifetime and on/off
25.000 h - >15.000 on/off	25.000 h - >15.000 on/off
Angolo di luce	Beam angle
↑ 120° + ↓ 120°	↑ 120° + ↓ 120°
CRI	Grado IK
>85	IK07
CRI	IK degree
>85	IK07


LED-W-BIOME NERO
8031440361132 2X3,5W

Misure - size
dimensioni in mm - size mm




LED-W-BIOME BCO
8031440361125 2X3,5W

Misure - size
dimensioni in mm - size mm



VEYRON


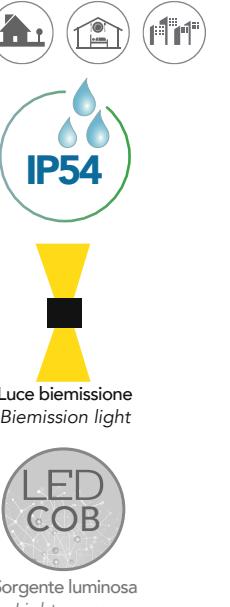


Applique a LED in alluminio goffrato bianco o nero
Aluminium LED wall lamp embossed white or black finish

Materiale	Material
Alluminio	Aluminium
Colore	Colour
Goffrato bianco - goffrato nero	Embossed white - embossed black
Driver	Driver
incluso	included
Sorgente luminosa	Light source
LED COB 2X3,5W	LED COB 2X3,5W
Temperatura colore	Color temperature
4000K	4000K
Flusso luminoso	Luminous flux
522 Lm	522 Lm
Durata e on/off	Lifetime and on/off
25.000 h - 15.000 on/off	25.000 h - 15.000 on/off
Angolo di luce	Beam angle
↑ 120° + ↓ 120°	↑ 120° + ↓ 120°
CRI	Grado IK
>85	IK07
CRI	IK degree
>85	IK07


LED-W-VEYRON NERO
8031440361095 2X3,5W

Misure - size
dimensioni in mm - size mm

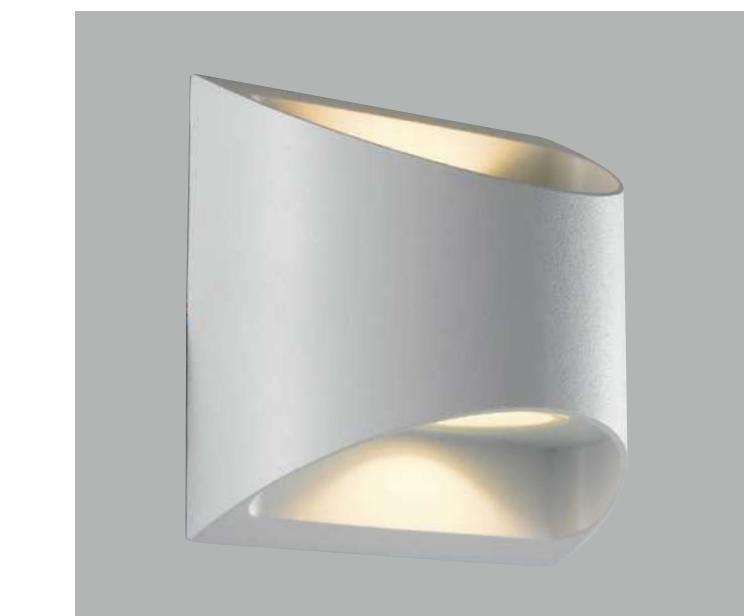

LED-W-VEYRON BCO
8031440361163 2X3,5W

Misure - size
dimensioni in mm - size mm



GOLF




Applique a LED in alluminio goffrato bianco o nero
Aluminium LED wall lamp embossed white or black finish

Materiale	Material
Alluminio	Aluminium
Colore	Colour
Goffrato bianco - goffrato nero	Embossed white - embossed black
Driver	Driver
incluso	included
Sorgente luminosa	Light source
LED COB 2X3,5W	LED COB 2X3,5W
Temperatura colore	Color temperature
4000K	4000K
Flusso luminoso	Luminous flux
540 Lm	540 Lm
Durata e on/off	Lifetime and on/off
25.000 h - >15.000 on/off	25.000 h - >15.000 on/off
Angolo di luce	Beam angle
↑ 120° + ↓ 120°	↑ 120° + ↓ 120°
CRI	Grado IK
>85	IK07
CRI	IK degree
>85	IK07

LED-W-GOLF NERO
8031440361118

2X3,5W


Misure - size
dimensioni in mm - size mm




LED-W-GOLF BCO
8031440361101

2X3,5W

Misure - size
dimensioni in mm - size mm



RAY

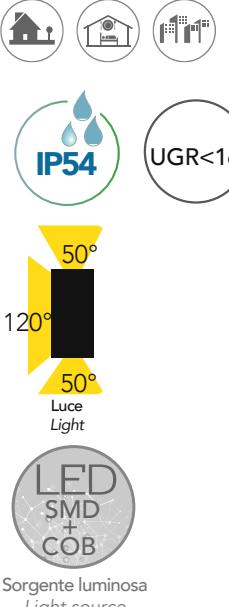


Applique a LED in alluminio biemissione più emissione frontale in antacite e corten goffrato

Materiale	Material
Alluminio	Aluminium
Colore	Colour
Goffrato antracite - goffrato corten	Embossed anthracite - embossed corten
Driver	Driver
incluso	included
Sorgente luminosa	Light source
LED SMD+COB 14W	LED SMD+COB 14W
Temperatura colore	Color temperature
4000K	4000K
Flusso luminoso	Luminous flux
890 Lm	890 Lm
Durata e on/off	Lifetime and on/off
20.000 h - >10.000 on/off	20.000 h - >10.000 on/off
Angolo di luce	Beam angle
↑ 50° + ↓ 50° + ➔ 120°	↑ 50° + ↓ 50° + ➔ 120°
CRI	Grado IK
>80	IK10
CRI	IK degree
>80	IK10

LED-W-RAY ANT
8031414867127

14W


Misure - size
dimensioni in mm - size mm



LED-W-RAY BRO
8031414870998

14W


Misure - size
dimensioni in mm - size mm



TWIN



Applique bi-emissione a LED in alluminio finitura antracite, bianco o nickel spazzolato
Double emission aluminium LED wall lamp anthracite, white or brush nickel finish

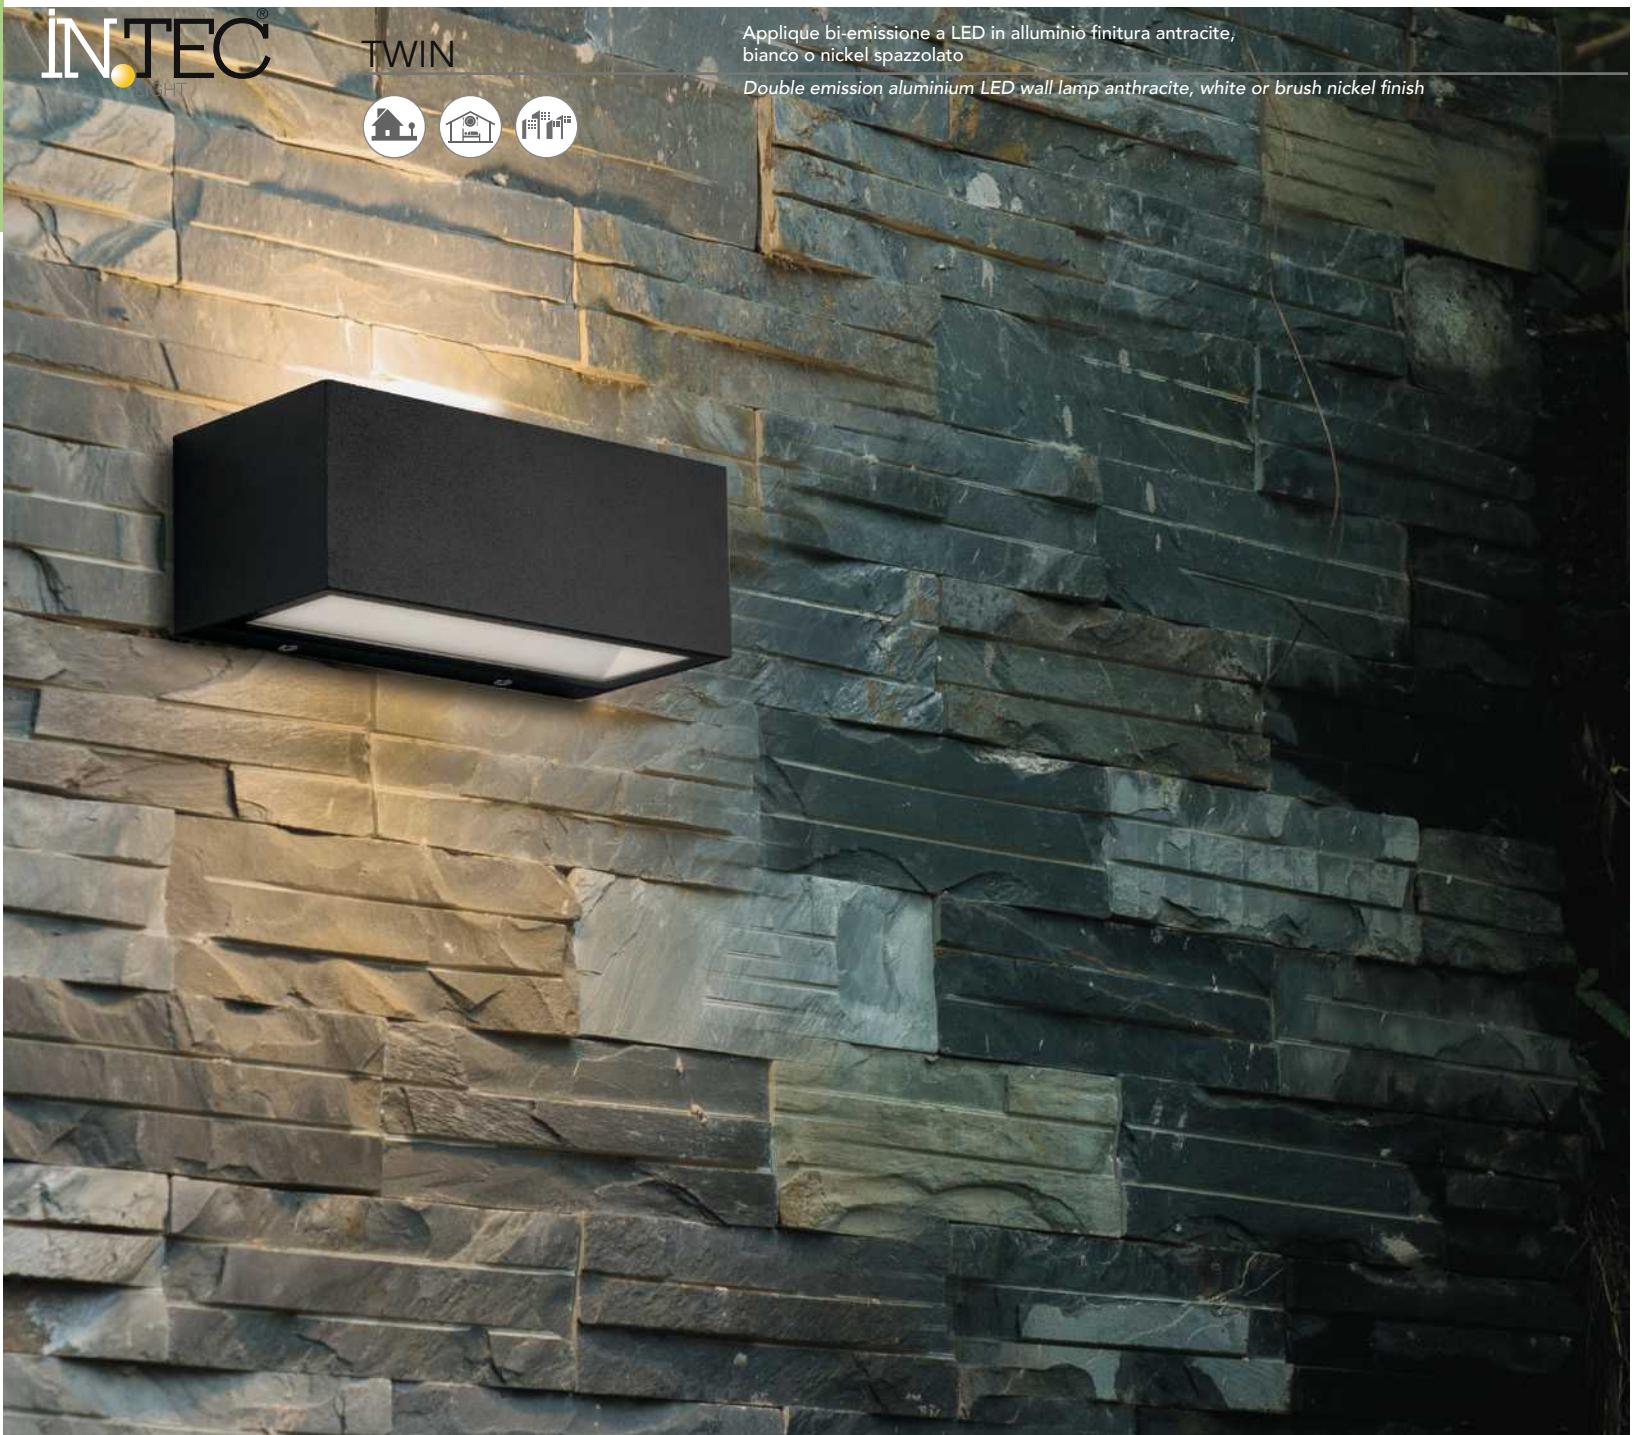

TWIN

Luce biemissione
Biemission lightSorgente luminosa
Light sourceLED-W-TWIN-XL ANT
8031414863686


40W - 3000 Lm

LED-W-TWIN-XL NIK
8031414864362

40W - 3000 Lm

LED-W-TWIN-XL BCO
8031414863716

40W - 3000 Lm

Misure - size
dimensioni in mm - size mmLED-W-TWIN-M ANT
8031414863693


20W - 1250 Lm

LED-W-TWIN-M NIK
8031414863990

20W - 1250 Lm

LED-W-TWIN-M BCO
8031414863969

20W - 1250 Lm

Misure - size
dimensioni in mm - size mmLED-W-TWIN-S ANT
8031414863709


12W - 900 Lm

LED-W-TWIN-S NIK
8031414863983

12W - 900 Lm

LED-W-TWIN-S BCO
8031414863976

12W - 900 Lm

Misure - size
dimensioni in mm - size mm



Applique angolare a LED in alluminio antracite o bianco goffrato con diffusore in PC

Angular aluminium LED wall lamp embossed anthracite or white finish and PC diffuser



UGR<16

Sorgente luminosa
Light source

Materiale

Alluminio

Colore

Goffrato bianco - goffrato antracite Embossed white - embossed anthracite

Driver

incluso

Sorgente luminosa

LED SMD 12W

Temperatura colore

4000K



Flusso luminoso

750 Lm

Durata e on/off

20.000 h - >10.000 on/off

Angolo di luce

120°

CRI

>80

UGR

<16

Grado IK

IK10

Material

Aluminium

Colour

Embossed white - embossed anthracite

Driver

included

Light source

LED SMD 12W

Color temperature

4000K



Luminous flux

750 Lm

Lifetime and on/off

20.000 h - >10.000 on/off

Beam angle

120°

CRI

>80

UGR

<16


IK degree

IK10

LED-W-LUXON ANT
8031414867097

12W


Misure - size
dimensioni in mm - size mm

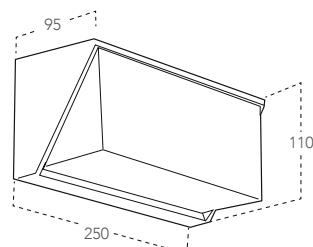

LED-W-LUXON BCO
8031414870677

12W

Misure - size
dimensioni in mm - size mm

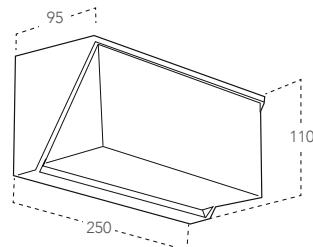

AGERA

Applique a LED in alluminio nero goffrato

Aluminium LED wall lamp embossed black finish

Luce biemissione
Biemission lightSorgente luminosa
Light source

AGERA

Materiale

Alluminio

Colore

Goffrato nero

Sorgente luminosa

LED SMD 2X3W - 2X8W

Driver

incluso

Temperatura colore

4000K

**Flusso luminoso**

340 Lm - 550 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

↑ 120° + ↓ 120°

CRI

>80

Grado IK

IK06

Material

Aluminium

Colour

Embossed black

Light source

LED SMD 2X3W - 2X8W

Driver

included

Color temperature

4000K

**Luminous flux**

340 Lm - 550 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

↑ 120° + ↓ 120°

CRI


>80

IK degree


IK06

LED-W-AGERA-90
8031440360951

2X3W - 340 Lm

Misure - size
dimensioni in mm - size mmLED-W-AGERA-180
8031440360975

2X8W - 550 Lm

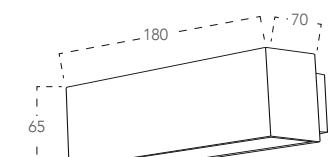Misure - size
dimensioni in mm - size mm

DEZIR

Applique a LED in alluminio nero goffrato

Aluminium LED wall lamp embossed black finish

Luce biemissione
Biemission lightSorgente luminosa
Light source**Materiale**

Alluminio

Colore

Goffrato nero

Driver

incluso

Sorgente luminosa

LED COB 2X6W

Temperatura colore

4000K

Flusso luminoso

630 Lm

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

↑ 120° + ↓ 120°

CRI

>80

Grado IK

IK07

Material

Aluminium

Colour

Embossed black

Driver

included

Light source

LED COB 2X6W

Color temperature

4000K

Luminous flux

630 Lm

Lifetime and on/off

25.000 h - >15.000 on/off

Beam angle

↑ 120° + ↓ 120°

CRI

>80


IK degree

IK07

LED-W-DEZIR

8031440360999

2X6W

Misure - size
dimensioni in mm - size mm

CLASSE A CE ☀ ⊕

ZONDA

Applique a LED in alluminio nero goffrato

Aluminium LED wall lamp embossed black finish

Luce biemissione
Biemission lightSorgente luminosa
Light source

IP54

**Materiale**

Alluminio

Colore

Goffrato nero

Driver

incluso

Sorgente luminosa

LED COB 2X6W

Color temperature

4000K

Luminous flux

630 Lm

Lifetime and on/off

25.000 h - >15.000 on/off

Beam angle

↑ 120° + ↓ 120°

CRI

>80

IK degree

IK07

LED-W-ZONDA

8031440360982

2X6W

Misure - size
dimensioni in mm - size mm

CLASSE A CE ☀ ⊕

BOXTER

Applique a LED in alluminio corten, nero, silver o bianco

Aluminium LED wall lamp corten, black, silver or white finish

Luce biemissione
Biemission lightSorgente luminosa
Light source

BOXTER

Materiale

Alluminio

Colore

Corten - nero - silver - bianco

Driver

incluso

Sorgente luminosa

LED COB 2X4W

Temperatura colore

4000K

Flusso luminoso

700 Lm

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

↑ 120° + ↓ 120°

CRI Grado IK

>80

IK07

Material

Aluminium

Colour

Corten - black - silver - white

Driver

included

Light source

LED COB 2X4W

Color temperature

4000K

Luminous flux

700 Lm

Lifetime and on/off

25.000 h - >15.000 on/off

Beam angle

↑ 120° + ↓ 120°

CRI IK degree

>80


IK07

LED-W-BOXTER NER
8031414862382

2X4W

LED-W-BOXTER BCO
8031414873043



2X4W

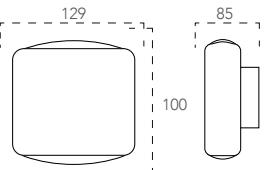Misure - size
dimensioni in mm - size mmLED-W-BOXTER BRO
8031414862405

2X4W

LED-W-BOXTER SIL
8031414862399

2X4W

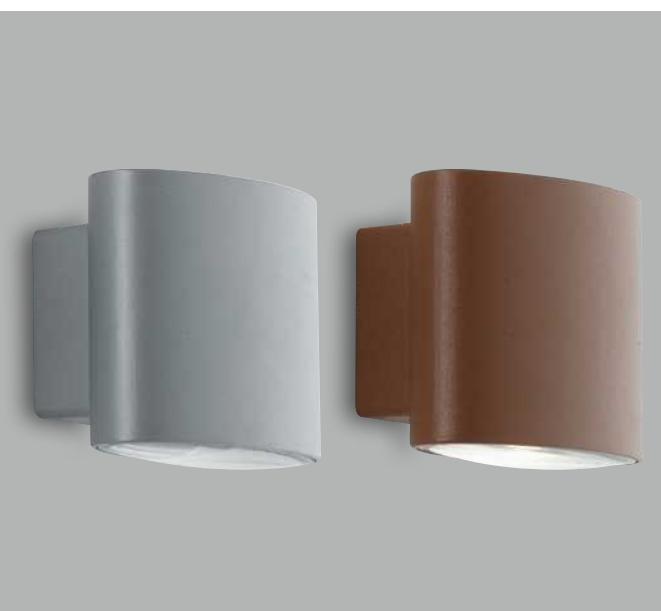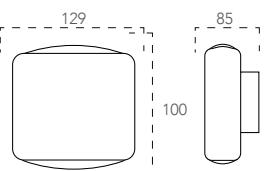Misure - size
dimensioni in mm - size mm

BEETLE

Applique a LED in alluminio biemissione in antracite e bianco goffrato

Aluminium LED wall lamp double emitting light embossed anthracite or white finish

Sorgente luminosa
Light source

BEETLE

Materiale

Alluminio

Colore

Antracite goffrato - bianco goffrato

Driver

incluso

Sorgente luminosa

LED SMD 6W

Temperatura colore

4000K



Flusso luminoso

890 Lm

Durata e on/off

20.000 h - >10.000 on/off

Angolo di luce

100°

CRI

>80

Grado IK

IK10

Material

Aluminium

Colour

Embossed anthracite - Embossed white

Driver

included

Light source

LED SMD 6W

Color temperature

4000K



Luminous flux

890 Lm

Lifetime and on/off

20.000 h - >10.000 on/off

Beam angle

100°

CRI


>80

IK degree


IK10

LED-W-BEETLE GR
8031414876969

6W

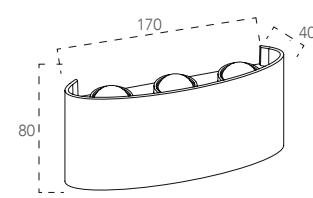Misure - size
dimensioni in mm - size mmLED-W-BEETLE BCO
8031414876952

6W

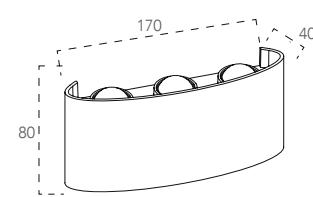Misure - size
dimensioni in mm - size mm

ALFA

Applique a LED in alluminio silver o bianco goffrato con paratie regolabili indipendenti

Aluminium LED wall lamp embossed silver or white finish with independent adjustable wings



Luce biemissione
con paratie
regolabili
indipendenti
Bi-emission light
with independent
adjustable wings

Sorgente luminosa
Light source

ALFA

Materiale

Alluminio

Colore

Silver goffrato - bianco goffrato

Driver

incluso

Sorgente luminosa

LED SMD 2X5W

Temperatura colore

3000K - 4000K



Flusso luminoso

510 Lm, 650 Lm

585 Lm, 738 Lm

Durata e on/off

30.000 h - >15.000 on/off

Angolo di luce

↑ 10°/120° + ↓ 10°/120°

CRI Grado IK

>80 IK04

Material

Aluminium

Colour

Embossed silver - Embossed white

Driver

included

Light source

LED SMD 2X5W

Colour temperature

3000K - 4000K

Luminous flux

510 Lm, 650 Lm

585 Lm, 738 Lm

Lifetime and on/off

30.000 h - >15.000 on/off

Beam angle

↑ 10°/120° + ↓ 10°/120°

CRI Grado IK


>80 IK04

LED-W-ALFA-10C GR
8031414871346

2X5W - 510 Lm

LED-W-ALFA-10M GR
8031414876693


2X5W - 585 Lm

Misure - size
dimensioni in mm - size mmLED-W-ALFA-10C BCO
8031414870851

2X5W - 650 Lm

LED-W-ALFA-10M BCO
8031414876686

2X5W - 738 Lm

Misure - size
dimensioni in mm - size mm

DELTA



Applique a LED in alluminio silver o bianco goffrato con paratie regolabili indipendenti
Aluminium LED wall lamp embossed silver or white finish with independent adjustable wings



Luce biemissione
con paratie
regolabili
indipendenti
Bi-emission light
with independ-
ent adjustable
wings



Sorgente luminosa
Light source

DELTA

Materiale

Alluminio

Colore

Silver goffrato - bianco goffrato

Driver

incluso

Sorgente luminosa

LED SMD 2X5W

Temperatura colore

3000K



Flusso luminoso

543 Lm - 675 Lm

Durata e on/off

30.000 h - >15.000 on/off

Angolo di luce

↑ 10°/120° + ↓ 10°/120°

CRI Grado IK

>80

IK04

Material

Aluminium

Colour

Embossed silver - Embossed white

Driver

included

Light source

LED SMD 2X5W

Color temperature

3000K



Luminous flux

543 Lm - 675 Lm

Lifetime and on/off

30.000 h - >15.000 on/off

Beam angle

↑ 10°/120° + ↓ 10°/120°

CRI Grado IK


>80

IK04

LED-W-DELTA-10C GR
8031414874125

2X5W - 543 Lm


Misure - size
dimensioni in mm - size mm



LED-W-DELTA-10C BCO
8031414868537

2X5W - 675 Lm

Misure - size
dimensioni in mm - size mm



BETA

Applique a LED in alluminio silver




Aluminium LED wall lamp silver finish



Materiale	Material
Alluminio	Aluminium
Driver	Driver
integrato	Built-in
Sorgente luminosa	Light source
LED SMD 3W	LED SMD 3W
Temperatura colore	Color temperature
3000K	3000K
Flusso luminoso	Luminous flux
250 Lm	250 Lm
Durata e on/off	Lifetime and on/off
25.000 h - >10.000 on/off	25.000 h - >10.000 on/off
Angolo di luce	Beam angle
120°	120°
CRI	CRI
>80	>80
Grado IK	IK degree
IK07	IK07

LED-BETA-AP1
8031434051216 3W 250 LM

Misure - size
dimensioni in mm - size mm



CLASSE A CE ROHS

GHIBLI

Applique a LED in alluminio

Aluminium LED wall lamp



Materiale

Alluminio

Material

Aluminium

Colore

Silver goffrato - bianco goffrato

Colour

Embossed silver - Embossed white

Driver

incluso

Driver

included

Sorgente luminosa

LED SMD 4X2W

Light source

LED SMD 4X2W

Temperatura colore

3000K

Color temperature

3000K

Flusso luminoso

520 Lm

Luminous flux

520 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

120°x 4

Beam angle

120°x 4

CRI

>80

CRI

>80

Grado IK

IK07

IK degree

IK07


LED-W-GHIBLI/8W

4X2W

8031440351430

Misure - size

dimensioni in mm - size mm




LED-W-GHIBLI/8W BCO

4X2W

8031440360593

Misure - size

dimensioni in mm - size mm



CLASSE A CE ROHS EMC

PARKER

Applique a LED biemissione in cemento grigio
Double emission LED wall light concrete gray finish



PARKER

Materiale

Cemento

Colore

Grigio

Driver

incluso

Sorgente luminosa

LED SMD 8,6W - 16,9W

Temperatura colore

4000K



Flusso luminoso

512Lm - 1000Lm

Durata e on/off

25.000 h - >12.500 on/off

Angolo di luce

↑ 120° + ↓ 120°

CRI Grado IK

>80 IK04

LED-PARKER-AP30 GR
8031414866977

Material

Concrete

Colour

Grey

Driver

included

Light source

LED SMD 8,6W - 16,9W

Color temperature

4000K



Luminous flux

512Lm - 1000Lm

Lifetime and on/off

25.000 h - >12.500 on/off


Beam angle

↑ 120° + ↓ 120°

CRI IK degree

>80 IK04

8,6W- 512 Lm

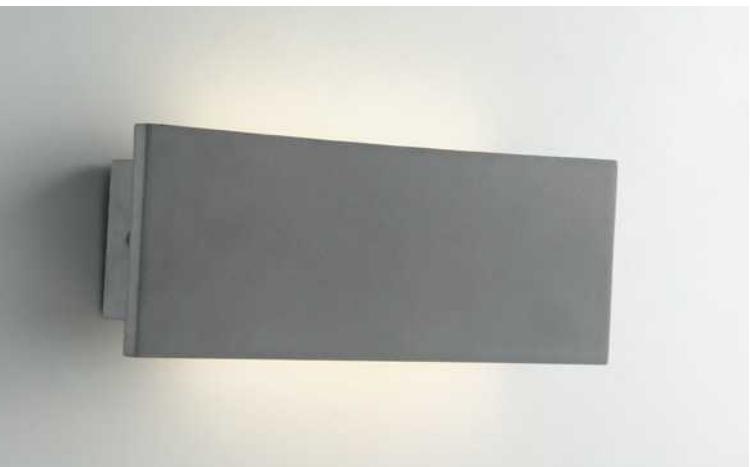


LED-PARKER-AP50 GR
803141486694

Connettore IP65

incluso

IP65 connector included

Misure - size
dimensioni in mm - size mm

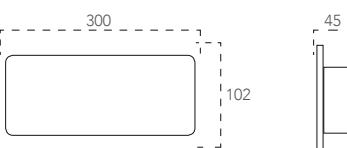

PARKER

Applique a LED biemissione in cemento bianco
Double emission LED wall light concrete white finish



Sorgente luminosa
Light source

Biemissione
Biemission light



Materiale

Cemento

Colore

Bianco

Driver

incluso

Sorgente luminosa

LED SMD 8W - 12W - 20W - 30W

Temperatura colore

4000K

Flusso luminoso

400Lm - 600Lm - 1000Lm - 1500Lm

Durata e on/off

25.000 h - >12.500 on/off

Angolo di luce

↑ 120° + ↓ 120°

CRI Grado IK

>80 IK04

Material

Concrete

Colour

White

Driver

included

Light source

LED SMD 8W - 12W - 20W - 30W

Color temperature

4000K

Luminous flux

400Lm - 600Lm - 1000Lm - 1500Lm

Lifetime and on/off

25.000 h - >12.500 on/off

Beam angle

↑ 120° + ↓ 120°

CRI IK degree

>80 IK04


LED-PARKER-AP30
8031414864195

8W - 400 Lm



Connettore IP65
incluso
IP65 connector
included

Misure - size
dimensioni in mm - size mm

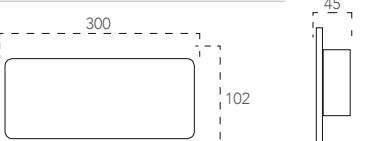


LED-PARKER-AP40
803141486201

12W - 600 Lm



Connettore IP65
incluso
IP65 connector
included

Misure - size
dimensioni in mm - size mm

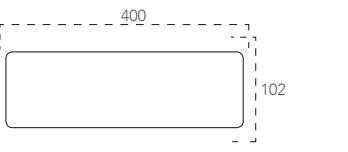


LED-PARKER-AP60
8031414862504

20W - 1000 Lm



Connettore IP65
incluso
IP65 connector
included

Misure - size
dimensioni in mm - size mm

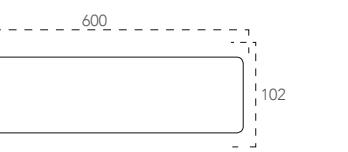


LED-PARKER-AP120
8031414862511

30W - 1500 Lm



Connettore IP65
incluso
IP65 connector
included





Misure - size
dimensioni in mm - size mm

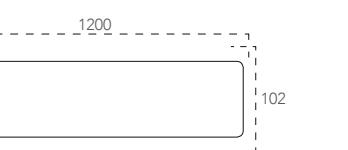



PORTLAND

Applique biemissione in cemento bianco
Double emission wall light concrete white finish



I-PORTLAND-AP2 BCO
8031414863563


2XGU10 MAX 35W

IK04



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



OAKLAND

Applique biemissione in cemento bianco
Double emission wall light concrete white finish



I-OAKLAND-AP2 BCO
8031414864218


2XGU10 MAX 35W

IK04



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



JUMP

Applique in alluminio silver, bianco o in acciaio inox
Wall lamp aluminium silver , white finish or stainless steel



Luce biemissione
Biemission light



Luce biemissione
Biemission light


I-JUMP-AP2-E27 SIL
8031414865390

2XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light source



I-JUMP-AP2 SIL
8031414862344

2XGU10 MAX 35W

I-JUMP-AP2 BCO
8031414862351

2XGU10 MAX 35W


I-JUMP-AP2 INOX
8031414862368

2XGU10 MAX 35W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



GU10
Attacco sorgente
Light source



ONE



Applique in alluminio nelle versioni bianco, antracite o corten

Aluminium wall lamp anthracite, white or corten finish



ONE

I-ONE-AP2 ANT
8031414082100



2XGU10 MAX 35W

I-ONE-AP2 BRO
8031414079995

2XGU10 MAX 35W

I-ONE-AP2 BCO
8031414878864

2XGU10 MAX 35W

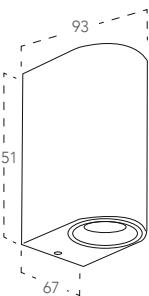Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmLuce biemissione
Biemission lightAttacco sorgente
Light sourceI-ONE-AP1 ANT
8031414073009


1XGU10 MAX 35W

I-ONE-AP1 BRO
8031414048861

1XGU10 MAX 35W

I-ONE-AP1 BCO
8031414878857


1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmLuce
lightAttacco sorgente
Light source

QUBO

Applique in alluminio nelle versioni bianco, antracite o corten

Aluminium wall lamp anthracite, white or corten finish

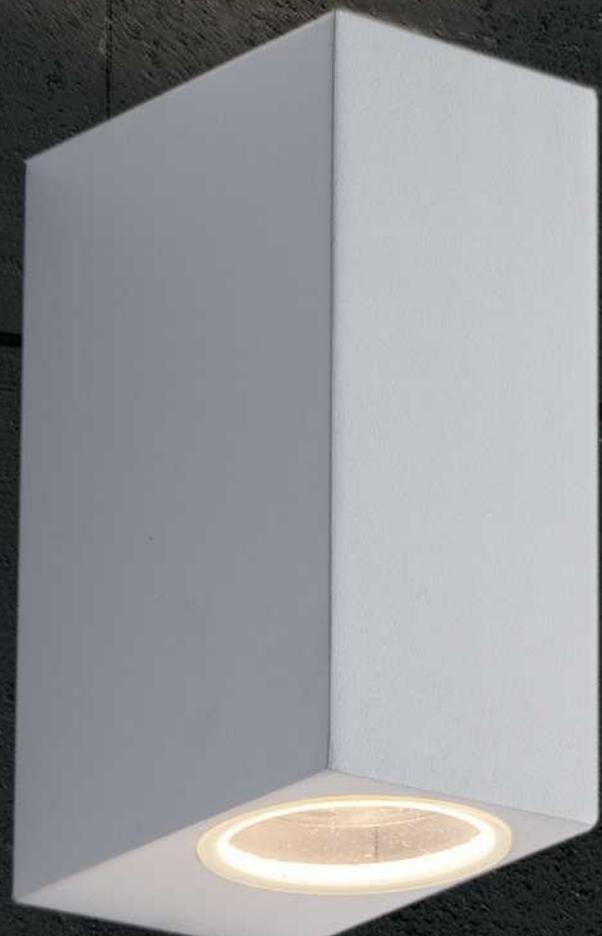

QUBO

I-QUBO-AP2 ANT
8031414084289


2XGU10 MAX 35W

I-QUBO-AP2 BRO
8031414083336

2XGU10 MAX 35W

I-QUBO-AP2 BCO
8031414878840

2XGU10 MAX 35W

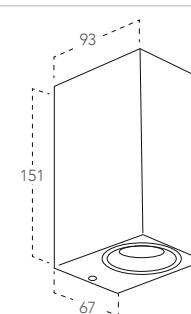Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

Luce biemissione
Biemission light


Attacco sorgente
Light source
I-QUBO-AP1 ANT
8031414084203


1XGU10 MAX 35W

I-QUBO-AP1 BRO
8031414082117

1XGU10 MAX 35W

I-QUBO-AP1 BCO
8031414878833

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

Luce
light


Attacco sorgente
Light source


TUCSON

I-TUCSON-AP BCO
8031414862160



2XE14 MAX 40W

 Lampadina non inclusa
Light bulb not included
Misure - size
dimensioni in mm - size mmI-TUCSON-AP SIL
8031414862184

2XE14 MAX 40W

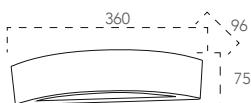 Lampadina non inclusa
Light bulb not included
Misure - size
dimensioni in mm - size mmI-TUCSON-AP BRO
8031414862191

2XE14 MAX 40W

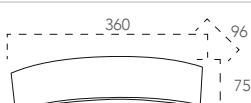 Lampadina non inclusa
Light bulb not included
Misure - size
dimensioni in mm - size mm


HURACAN



Lampadina non
inclusa
Light bulb not
included



Attacco sorgente
Light source



Luce
light




Applique in alluminio pressofuso antracite goffrato

Alluminium die-cast wall lamp embossed anthracite finish



SEATTLE




Lampadina non
inclusa
Light bulb not
included



Attacco sorgente
Light source



Luce biemissione
Biemission light

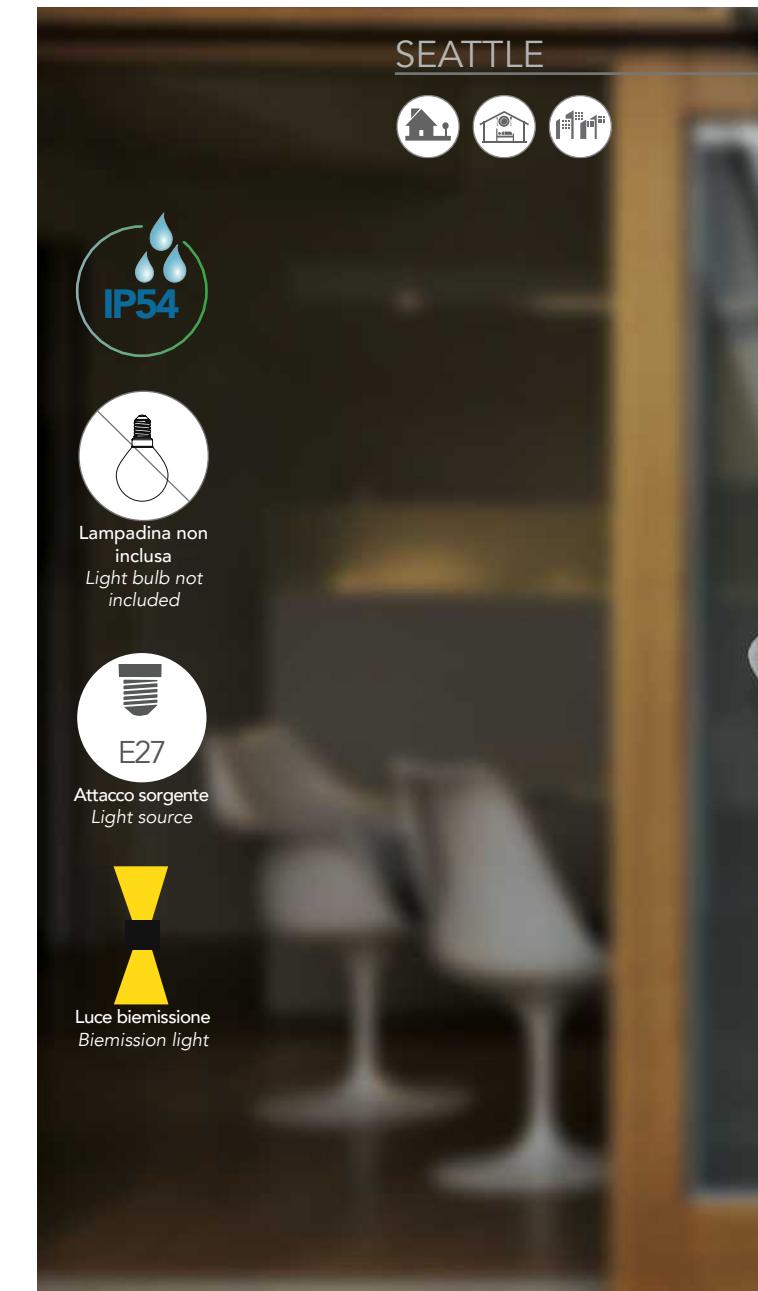

Applique in alluminio, finitura antracite con diffusore opale in policarbonato

Aluminium wall lamp with anthracite finish and PC opal diffuser




I-HURACAN-AP
8031440361026

1XGU10 MAX 35W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




I-SEATTLE-AP
8031440312233

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




AUSTIN



Applique in alluminio bronzo, bianco, silver o nero con diffusore in policarbonato

Aluminium wall lamp bronze, white, silver or black PC diffuser

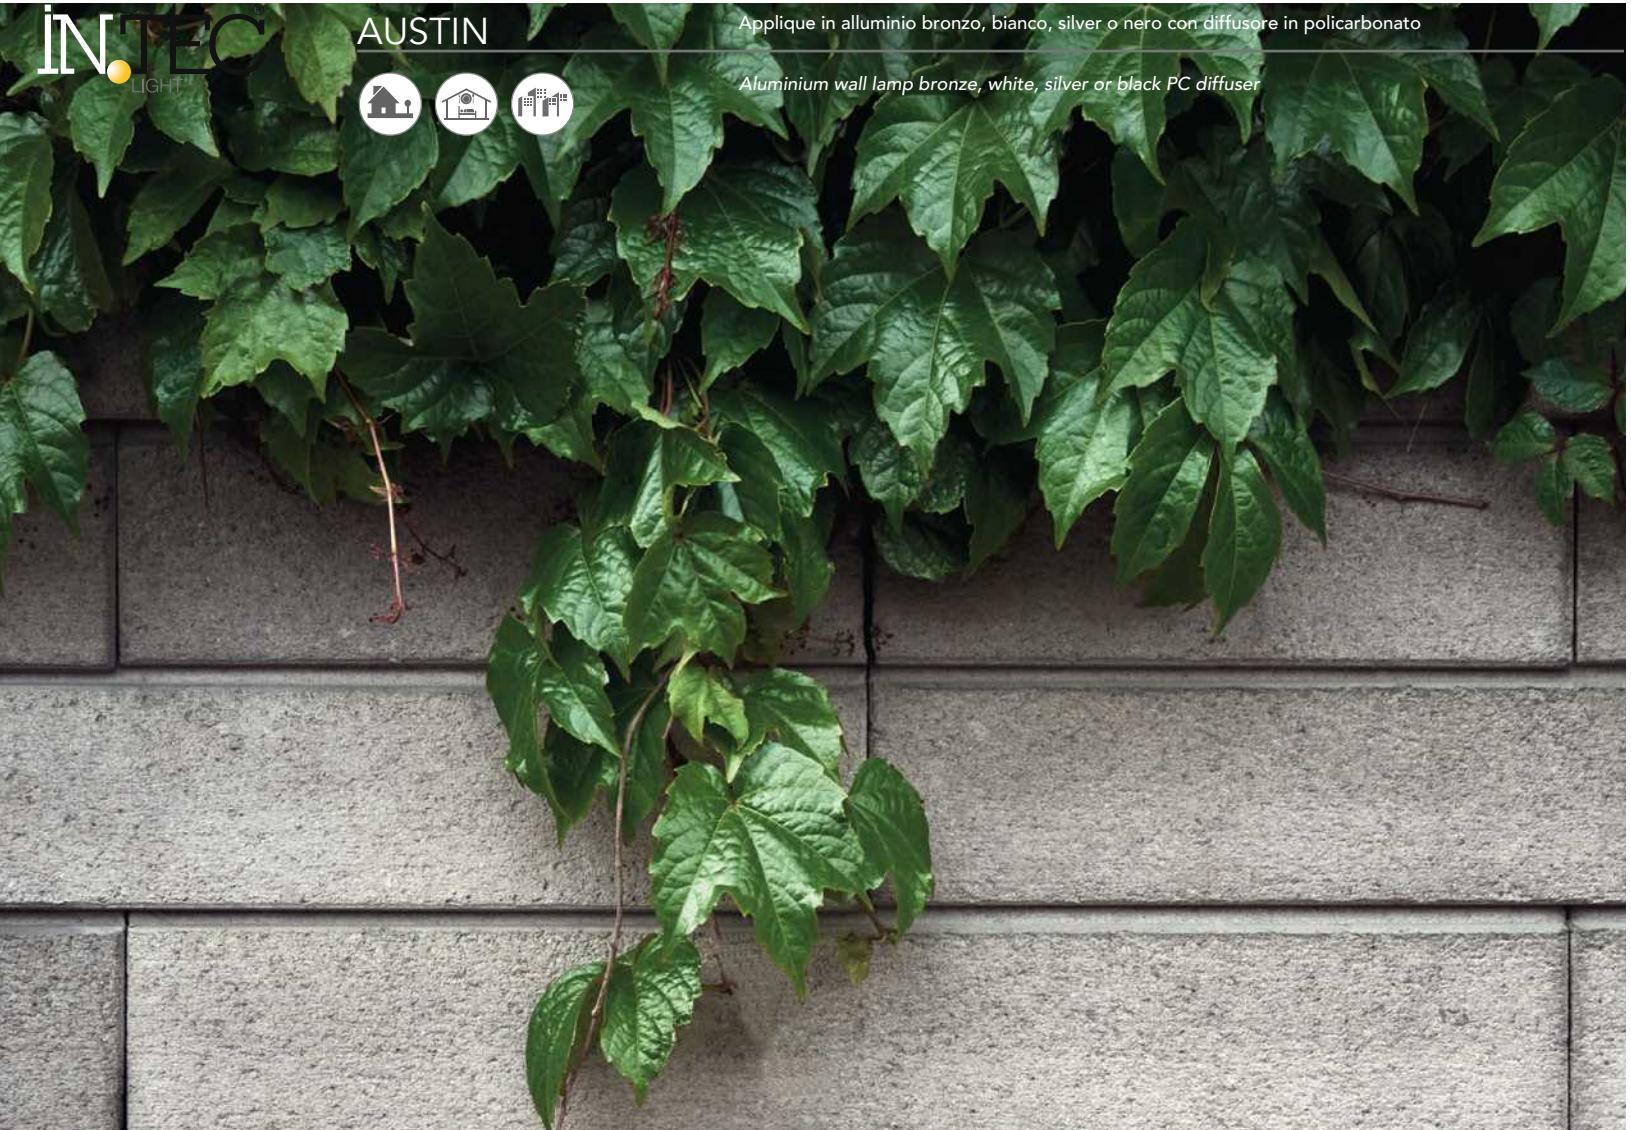

IP54



E27
Attacco sorgente
Light Source


I-AUSTIN-AP BCO
8031440362122

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

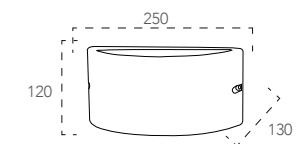

E27
Attacco sorgente
Light Source


I-AUSTIN-AP SIL
8031414862429

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

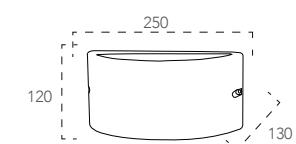

E27
Attacco sorgente
Light Source


I-AUSTIN-AP BRO
8031440362108

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

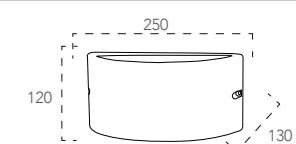

E27
Attacco sorgente
Light Source


I-AUSTIN-AP NER
8031440362139

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

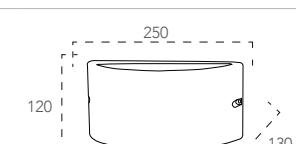




BOSTON

Applique in alluminio finitura antracite con diffusore opale in policarbonato

Aluminium wall lamp anthracite finish with PC opal diffuser

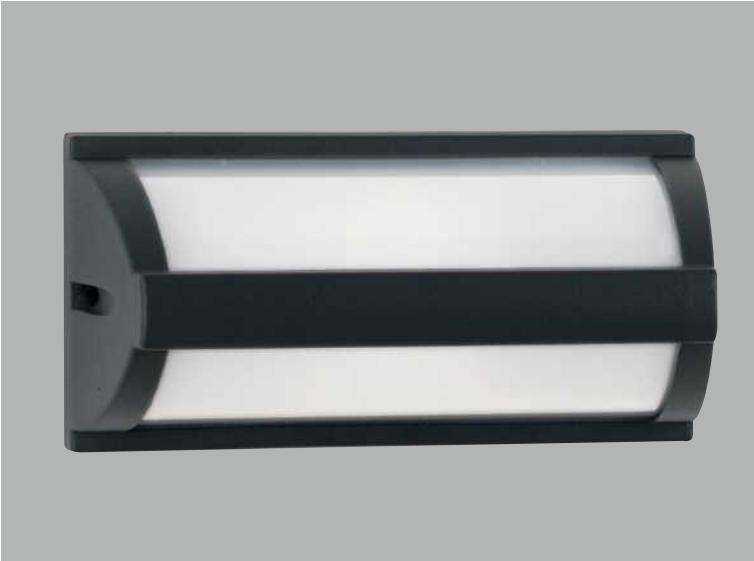


I-BOSTON-AP
8031440312240

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



ATLANTA

Applique in alluminio con diffusore opale in policarbonato finitura antracite

Aluminium wall lamp with PC opal diffuser anthracite finish




I-ATLANTA-AP
8031440312257

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included


Misure - size
dimensioni in mm - size mm



MEMPHIS

Applique in alluminio con diffusore opale in policarbonato finitura antracite

Aluminium wall lamp with PC opal diffuser anthracite finish




I-MEMPHIS-AP
8031440312226

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included


Misure - size
dimensioni in mm - size mm



DENVER

Applique in alluminio con diffusore opale in policarbonato finitura antracite

Aluminium wall lamp with PC opal diffuser anthracite finish




I-DENVER-AP
8031440312264

1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



MONDRIAN

Applique in metallo bronzo o silver con diffusore in vetro

Metal wall lamp bronze or silver glass diffuser



IP44


GAETA

Lanterna in alluminio pressofuso finitura nero-oro con diffusore in vetro

Diecast aluminium black-gold finish lantern with glass diffuser



IP23

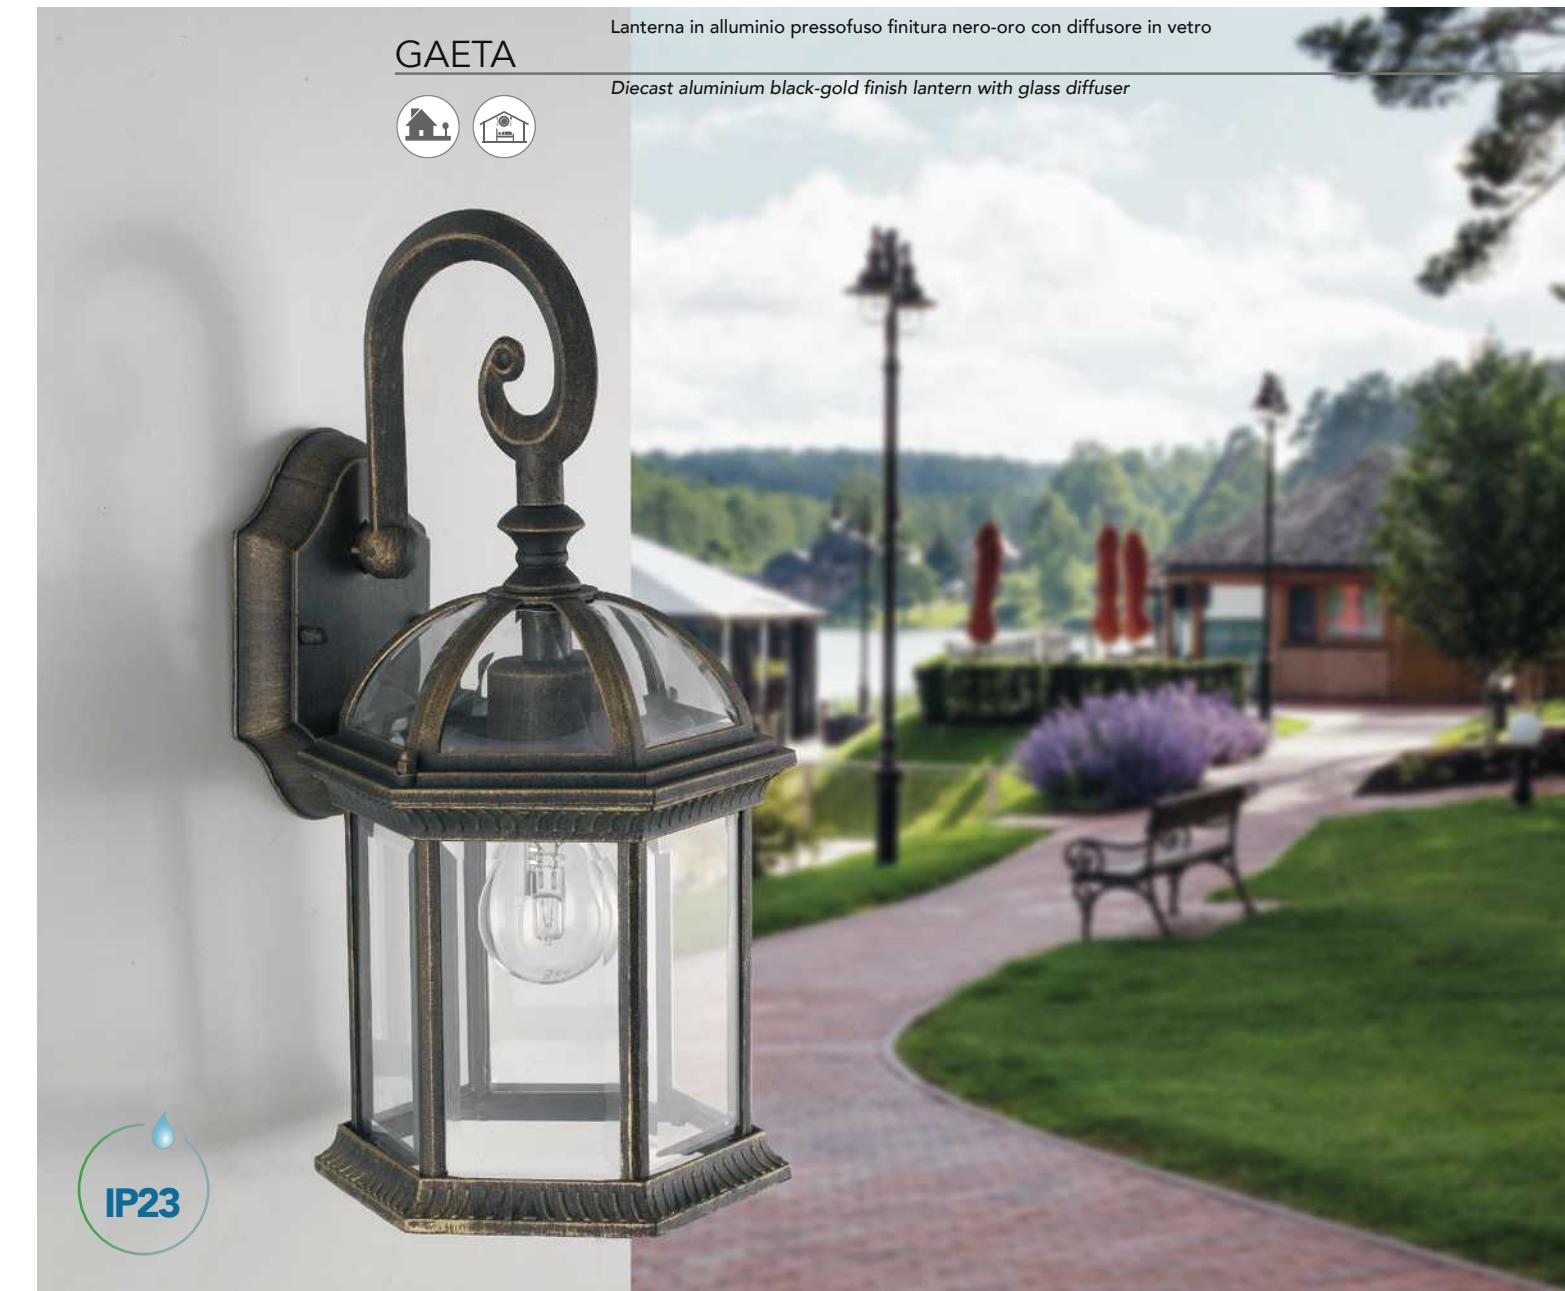

I-MONDRIAN-AP SIL
8031414862306



1XE27 MAX 25W

I-MONDRIAN-AP BRO
8031414862313




1XE27 MAX 25W



Attacco sorgente
Light source

Misure - size
dimensioni in mm - size mm

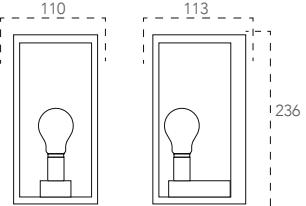

LANT-GAETA-AP1
8031440313278

1XE27 MAX 60W




Lampadina non inclusa
Light bulb not included



Attacco sorgente
Light source

Misure - size
dimensioni in mm - size mm





AKRON

Faro proiettore in alluminio nero con picchetto incluso

Black aluminium flood light with spike included



I-AKRON-PR
8031440312219

1XGU10 MAX 35W



Lampadina non inclusa
Light bulb not included

Accessori inclusi
Accessory included

Picchetto
spike




GU10
Attacco sorgente
Light source



Lampadina consigliata
suggested
Light bulb



Misure - size
dimensioni in mm - size mm

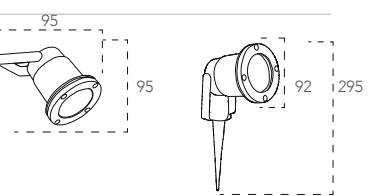

ZOOM

Plafoniera a LED wifi con videocamera di sicurezza integrata
LED wifi ceiling lamp with built-in security camera



ZOOM

CONTROL SYSTEM
EASY INSTALLATION



COMPATIBLE WITH
AMAZON ECHO SHOW
GOOGLE CHROME CAST

Materiale

Alluminio+PC

Colore

Antracite goffrato

Driver

integrato

Sorgente luminosa

LED SMD 30W

Temperatura colore

4000K

Flusso luminoso

1800 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

110°

CRI

>85

Grado IK

IK08

Material

Aluminium+PC

Colour

Embossed anthracite

Driver

Built-in

Light source

LED SMD 30W

Color temperature

4000K

Luminous flux

1800 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

110°

CRI

>85

IK degree





IK08



LED-ZOOM-INT
8031414877874

30W PF 0,95

Misure - size
dimensioni in mm - size mm

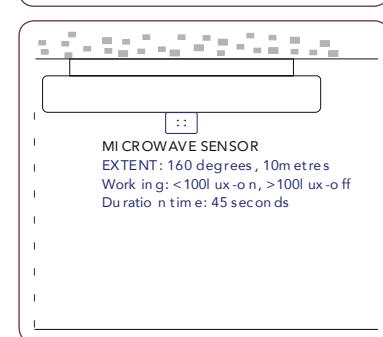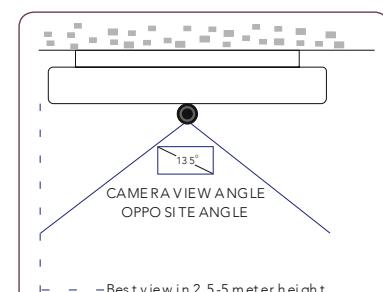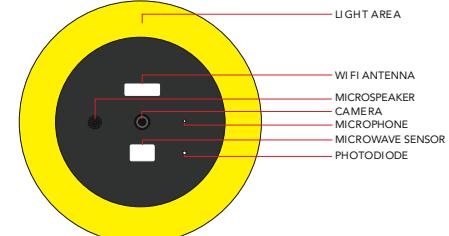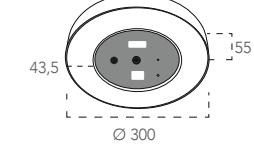

Tipo di sensore video - Video sensor type	1/2,9" CMOS Pixel 2.0 Mega Illuminazione minima - Min illuminance Color 0.10lux @F2.0, black and white 0.01lux @F2.0
Angolo vista camera - Camera view angle	135° Otturatore - Shutter 1/25-1/100,000 per second Infrarossi - IR High power LED with ICR WDR Digital WDR H.264 32Kbps - 2Mbps
Video compression standard	H.264 32Kbps - 2Mbps
Video compression standard	1920x1080 Risoluzione video - Max picture size
Frequenza fotogrammi - Frame rate	1-20 per second Audio Full duplex audio (doppio sistema di comunicazione)
Memoria - Storage	Support SD card (MAX 128Gb) Cloud storage NVR Support HD/SD; support mirror
Impostazione immagine - Image setting	Reset Controllo della luce - Lighting control Interfaccia di protocollo - Interface protocol Comunicazione di protocollo - Communication protocol Funzioni generali - General function
Reset	Support manual, sensor, plan switch light (gestione accensioni) Private TCP/IP, HTTP, DHCP, DNS, RTSP Dual stream, password protection IEEE802.11b/g/n PIR Support PIR and motion detection

TUTOR

Sorgente luminosa
Light source

LED SMD

Sorgente luminosa
Light source

Materiale

Alluminio antracite

Colore

antracite

Driver

incluso

Sorgente luminosa

LED SMD 10W

Temperatura colore



Flusso luminoso

600 Lm

Durata e on/off

30.000 h - >15.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK08

Material

Aluminium anthracite

Colour

anthracite

Driver

included

Light source

LED SMD 10W

Color temperature



Luminous flux

600 Lm

Lifetime and on/off

30.000 h - >15.000 on/off

Beam angle

120°

CRI

>80

IK degree

IK08

VERTIGO

Sorgente luminosa
Light source

Plafoniera in cemento

Materiale

Cemento

Colore

Bianco - grigio

Driver

incluso

Sorgente luminosa

LED SMD 10W

Temperatura colore

4000K

Flusso luminoso

500 Lm

Durata e on/off

25.000h - >12.500 on/off

Angolo di luce

120°

CRI

>80

Concrete ceiling lamp

Material

Concrete

Colour

White - grey

Driver

included

Light source

LED SMD 10W

Color temperature

4000K

Luminous flux

500 Lm

Lifetime and on/off

25.000h - >12.500 on/off

Beam angle



120°

CRI

>80

LED-TUTOR-INT
8031414870165 10W


Misure
dimensioni in mm

LED-VERTIGO-R23
8031414867141 10WConnettore IP65
incluso
IP65 connector
includedLED-VERTIGO-Q23
8031414867134 10WConnettore IP65
incluso
IP65 connector
included

EXTRA



Materiale	Material
PP+PC	PP+PC
Driver	Driver
integrato	Built-in
Sorgente luminosa	Light source
LED SMD 10W	LED SMD 10W
Temperatura colore	Color temperature
4000K	4000K
Flusso luminoso	Luminous flux
700 Lm	700 Lm
Durata e on/off	Lifetime and on/off
25.000 h - >10.000 on/off	25.000 h - >10.000 on/off
Angolo di luce	Beam angle
120°	120°
CRI	Grado IK
>80	IK06
LED-EXTRA-BCO	
8031440361071	10W
LED-EXTRA-ANT	
8031440361064	10W


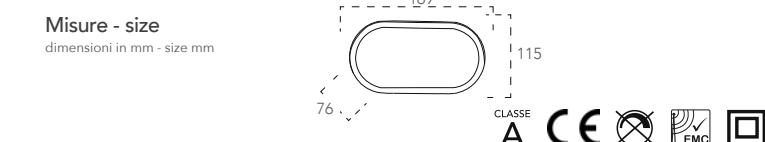


SENSITIVE



Materiale	Material
PP+PC	PP+PC
Driver	Driver
integrato	Built-in
Sorgente luminosa	Light source
LED SMD 14W	LED SMD 14W
Temperatura colore	Color temperature
3000K - 4000K	3000K - 4000K
Flusso luminoso	Luminous flux
1000 Lm	1000 Lm
Durata e on/off	Lifetime and on/off
25.000 h - >10.000 on/off	25.000 h - >10.000 on/off
Angolo di luce	Beam angle
120°	120°
CRI	Grado IK
>80	IK06
LED-SENSITIVE-BCO	
8031440361750	14W
LED-SENSITIVE-ANT	
8031440361743	14W
LED-SENSITIVE-C BCO	
8031414876815	14W

Misure - size
dimensioni in mm - size mm

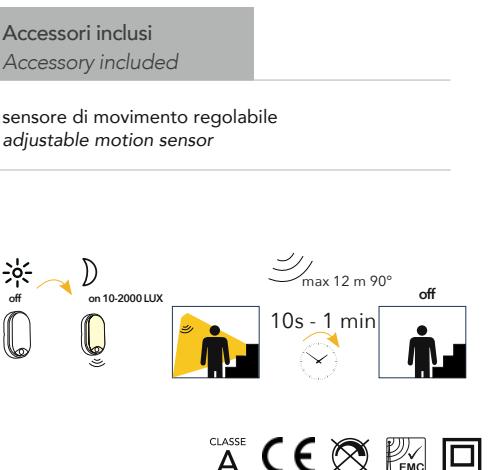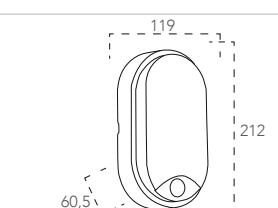


SHELLY



Plafoniera LED integrato con sensore, base in Policarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp with sensor in white or anthracite colour with white PC diffuser

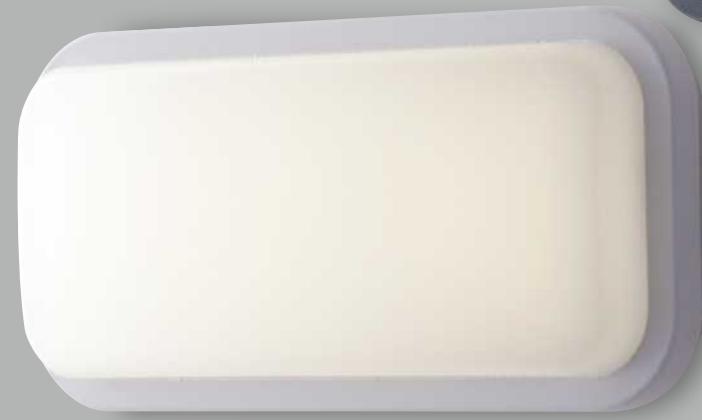**Materiale**

PC+PC

Driver

integrato

Sorgente luminosa

LED SMD 20W

Temperatura colore

4000K

Flusso luminoso

1600 Lm

Durata e on/off

25.000h - >10.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK06

Material

PC+PC

Driver

Built-in

Light source

LED SMD 20W

Color temperature

4000K

Luminous flux

1600 Lm

Lifetime and on/off

25.000h - >10.000 on/off

Beam angle

120°

CRI

>80

IK degree


IK06

LED-SHELLY-Q-MW BCO
8031414862153

20W

LED-SHELLY-Q-MW ANT
8031414862177

20W


Misure - size
dimensioni in mm - size mmAccessori inclusi
Accessory includedsensore di movimento preimpostato
pre-set motion sensor

SHELLY



Plafoniera LED integrato, base in Policarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser

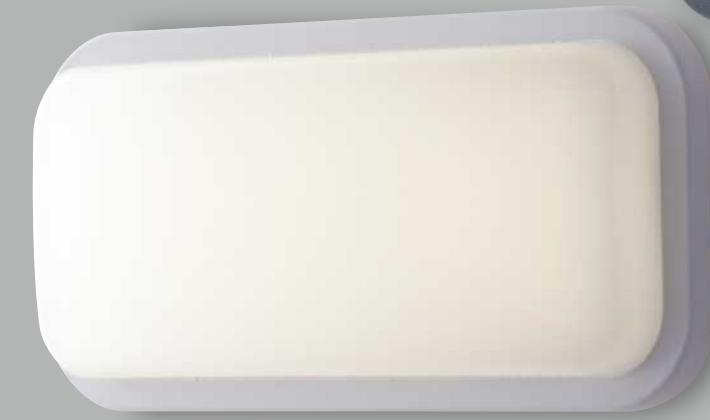**Materiale**

PC+PC

Driver

integrato

Sorgente luminosa

LED SMD 20W

Temperatura colore

3000K - 4000K

Flusso luminoso

1600 Lm - 1200 Lm

Durata e on/off

25.000h - >10.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK06

Material

PC+PC

Driver

Built-in

Light source

LED SMD 20W

Color temperature

3000K - 4000K

Luminous flux

1600 Lm - 1200 Lm

Lifetime and on/off

25.000h - >10.000 on/off

Beam angle

120°

CRI

>80

IK degree

IK06

LED-SHELLY-Q-L BCO
8031414862016

20W-1600 LM

LED-SHELLY-Q-L ANT
8031414862023

20W-1600 LM

LED-SHELLY-Q-LC BCO
8031414876747

20W-1600 LM

LED-SHELLY-Q-S BCO
8031414085507



15W-1200 LM

LED-SHELLY-Q-S ANT
8031414862009

15W-1200 LM

LED-SHELLY-Q-SC BCO
8031414876730

15W-1200 LM

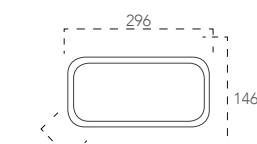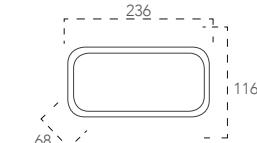Misure - size
dimensioni in mm - size mmMisure - size
dimensioni in mm - size mm

SHELLY

Plafoniera LED integrato, base in Polycarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser

Sorgente luminosa
Light source

Materiale

PC+PC

Driver

integrato

Sorgente luminosa

LED SMD 20W, 15W

Temperatura colore

3000K - 4000K

Flusso luminoso

1600 Lm - 1200 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

CRI Grado IK

>80 IK06

Material

PC+PC

Driver

Built-in

Light source

LED SMD 20W, 15W

Color temperature

3000K - 4000K

Luminous flux

1600 Lm - 1200 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

120°

CRI IK degree

>80 IK06

LED-SHELLY-L BCO
8031440351713

20W-1600 LM

LED-SHELLY-L ANT
8031440351690

20W-1600 LM

LED-SHELLY-LC BCO
8031414876716

20W-1600 LM

LED-SHELLY-S BCO
8031440351720


15W-1200 LM

LED-SHELLY-S ANT
8031440351706

15W-1200 LM

LED-SHELLY-SC BCO
8031414876761

15W-1200 LM

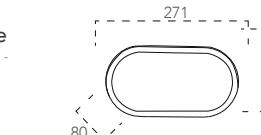Misure - size
dimensioni in mm -
size mmMisure - size
dimensioni in mm -
size mm

EVER

Plafoniera LED integrato, base in Polycarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser

Sorgente luminosa
Light source

Materiale

PC+PC

Driver

integrato

Sorgente luminosa

LED SMD 30W, 15W

Temperatura colore

3000K - 4000K

Flusso luminoso

2400 Lm - 1200 Lm

Durata e on/off

20.000 h - >10.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK06

CRI

>80

IK degree

IK06

Material

PC+PC

Driver

Built-in

Light source

LED SMD 30W, 15W

Color temperature

3000K - 4000K

Luminous flux

2400 Lm - 1200 Lm

Lifetime and on/off

20.000 h - >10.000 on/off

Beam angle

120°

LED-EVER-Q-L BCO
8031414862276

30W-2400 LM

PF 0.90

LED-EVER-Q-L ANT
8031414862283

30W-2400 LM

PF 0.90

LED-EVER-Q-LC BCO
8031414876785

30W-2400 LM

PF 0.90

LED-EVER-Q-S BCO
8031414862238

15W-1200 LM

PF 0.90

LED-EVER-Q-S ANT
8031414862269


15W-1200 LM

PF 0.90

LED-EVER-Q-SC BCO
8031414876778

15W-1200 LM

PF 0.90

Misure - size
dimensioni in mm -
size mmMisure - size
dimensioni in mm -
size mm

EVER



Sorgente luminosa
Light source



Plafoniera LED integrato, base in Polycarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser



EVER



Sorgente luminosa
Light source



Plafoniera LED integrato materiale base PC bianco o silver con diffusore bianco PC

Polycarbonate built-in LED ceiling lamp PC base white or silver with white PC diffuser



Materiale

PC+PC

Driver

integrato

Sorgente luminosa

LED SMD 20W, 15W

Temperatura colore

3000K - 4000K

Flusso luminoso

1600 Lm - 1200 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK06

Material

PC+PC

Driver

Built-in

Light source

LED SMD 20W, 15W

Color temperature

3000K - 4000K

Luminous flux

1600 Lm - 1200 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

120°

CRI


>80

IK degree

IK06



Misure - size
dimensioni in mm -
size mm



Misure - size
dimensioni in mm -
size mm



CLASSE A+ CE EMC □



Materiale

PC+PC

Driver

Built-in

Sorgente luminosa

LED SMD 30W

Temperatura colore

3000K - 4000K

Flusso luminoso

2400 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

Power factor

PF 0,90

CRI

>80

IK degree

IK06

Material

PC+PC

Driver

Built-in

Light source

LED SMD 30W

Color temperature

3000K - 4000K

Luminous flux

2400 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

120°

Power factor

PF 0,90

CRI

>80

IK degree

IK06

LED-EVER-XL-BCO
8031440355612

LED-EVER-XL-SIL
8031440355605


LED-EVER-XLC BCO
8031414876792

30W-2400 LM PF 0.90

30W-2400 LM PF 0.90

30W-2400 LM PF 0.90

Misure - size
dimensioni in mm -
size mm



CLASSE A+ CE EMC □

EVER

Plafoniera LED integrato con sensore, base in Policarbonato bianco o silver diffusore in policarbonato bianco

Poly carbonate built-in LED ceiling lamp with sensor in white or silver colour with white PC diffuser



Sorgente luminosa
Light source

**Materiale**

PC+PC

Driver

integrato

Sorgente luminosa

LED SMD 30W

Temperatura colore

4000K

Flusso luminoso

2400 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

Power factor

PF 0,90

CRI

>80

Material

PC+PC

Driver

Built-in

Light source

LED SMD 30W

Color temperature

4000K

Luminous flux

2400 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

120°

Power factor

PF 0,90

CRI

>80

Grado IK

IK06

IK degree


IK06

Accessori inclusiAccessory included
sensore di movimento regolabile
adjustable motion sensor

CLASSE A+ CE EMC



Misure - size
dimensioni in mm - size mm



EVER

Plafoniera LED integrato materiale base PC bianco o antracite con diffusore bianco PC

Poly carbonate built-in LED ceiling lamp PC base white or anthracite with white PC diffuser



Sorgente luminosa
Light source

**Materiale**

PC+PC

Driver

integrato

Sorgente luminosa

LED SMD 30W, 20W

Temperatura colore

4000K

Flusso luminoso

2300 Lm - 1600 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK06

Material

PC+PC

Driver

Built-in

Light source

LED SMD 30W, 20W

Color temperature

4000K

Luminous flux

2300 Lm - 1600 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

120°

CRI


>80

Grado IK


IK06



Misure - size
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



PICNIC




Stringa elettrificata E14 o E27 per esterno con cavo in gomma inclusivo di spina schuko e connettore modulare
Light string E14 or E27 for outdoor rubber cable inclusive of schuko plug and modular connector



PICNIC



Misure - size
dimensioni in mm - size mm

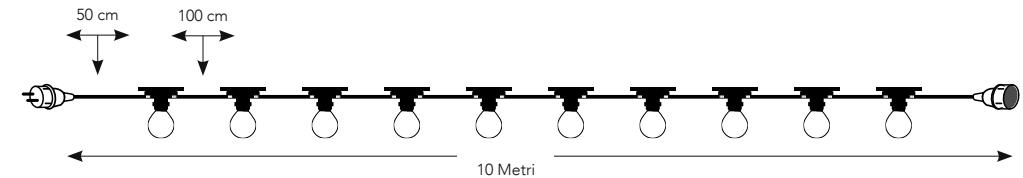

I-PICNIC-E27
8031414862719

10XE27 MAX 25W

I-PICNIC-E27-BCO
8031414043064

10XE27 MAX 25W


Lampadina non inclusa
Light bulb not included



Attacco sorgente
Source



Misure - size
dimensioni in mm - size mm

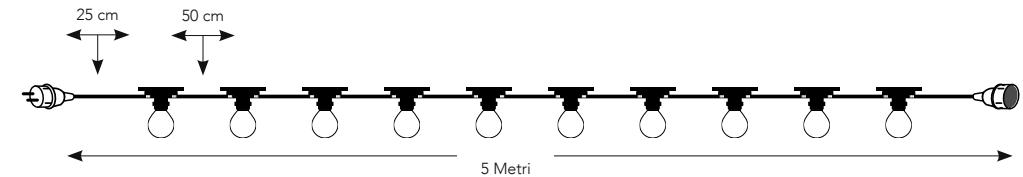

I-PICNIC-E14
8031414862726

10XE14 MAX 25W

I-PICNIC-E14-BCO
8031414023745

10XE14 MAX 25W

Lampadina non inclusa
Light bulb not included




Attacco sorgente
Source



end-to-end

Easy Connection

max 1000W



WIZARD



Collezione in alluminio antracite, LED integrato RGB+CCT con funzione smart Wi-Fi, compatibili con dispositivi VOICE CONTROL

Aluminium collection anthracite colour built-in LED RGB+CCT with smart Wi-Fi function, compatible with VOICE CONTROL devices



Sorgente luminosa
Light source



WIZARD



Materiale	Alluminio+PC	Material	Aluminium+PC
Colore	Antracite	Colour	Anthracite
Driver	integrato	Driver	Built-in
Sorgente luminosa	LED SMD 10W	Light source	LED SMD 10W
Temperatura colore	RGB CCT	Color temperature	Dimming
Flusso luminoso	400 Lm	Luminous flux	400 Lm
Durata e on/off	30.000 h - >15.000 on/off	Lifetime and on/off	30.000 h - >15.000 on/off
Angolo di luce	110°	Beam angle	110°
CRI	Grado IK	CRI	IK degree
>80	IK08	>80	IK08




LED-WIZARD-AP
8031414870172

10W



Misure - size
dimensioni in mm - size mm

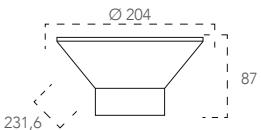


LED-WIZARD-P80
8031414870189

10W



Misure - size
dimensioni in mm - size mm

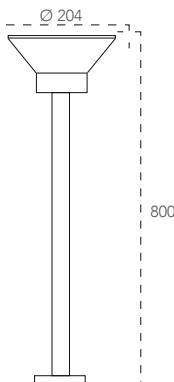

DISCOVERY



Applique a LED wifi con videocamera di sicurezza integrata antracite con diffusore bianco
LED wifi wall lamp with built-in security camera anthracite grey with white diffuser



Sorgente luminosa
Light source



1080p
FULLHD

Support micro SD card
(MAX 128Gb)
MICRO SD CARD
128GB
non inclusa
not included



DISCOVERY

CONTROL SYSTEM EASY INSTALLATION



COMPATIBLE WITH
AMAZON ECHO SHOW
GOOGLE CHROME CAST

Materiale

Alluminio+PC

Colore

Antracite goffrato

Driver

integrato

Sorgente luminosa

LED SMD 15W

Temperatura colore

4000K

Flusso luminoso

800 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

360°

CRI

>80

Grado IK

IK07

Material

Aluminium+PC

Colour

Embossed anthracite

Driver

Built-in

Light source

LED SMD 15W

Color temperature

4000K

Luminous flux

800 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

360°

CRI

>80

IK degree

IK07








LED-Discovery-INT
8031414877843

15W - 960 LM

PF 0,95

Misure - size

dimensioni in mm - size mm

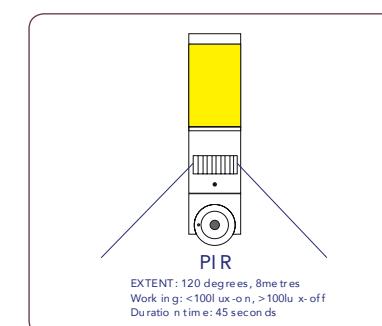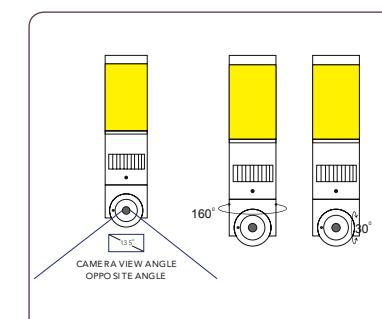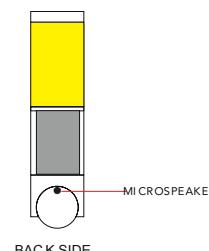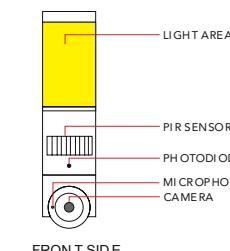


Tipo di sensore video - Video sensor type	1/2,9" CMOS 2.0 Mega
Illuminazione minima - Min illuminance	Color 0.10lux @F2.0, black and white 0.01lux @F2.0
Angolo vista camera - Camera view angle	135°
Otturatore - Shutter	1/25-1/100,000 per second
Infrarossi - IR	High power LED with ICR
WDR	Digital WDR
Video compression standard	H.264
Video compression standard	32Kbps - 2Mbps
Risoluzione video - Max picture size	1920x1080
Frequenza fotogrammi - Frame rate	1-20 per second
Audio	Full duplex audio (doppio sistema di comunicazione)
Memoria - Storage	Support SD card (MAX 128Gb) Cloud storage NVR
Impostazione immagine - Image setting	Support HD/SD; support mirror
Reset	Support
Controllo della luce - Lighting control	Support manual, sensor, plan switch light (gestione accensioni)
Interfaccia di protocollo - Interface protocol	Private
Comunicazione di protocollo - Communication protocol	TCP/IP, HTTP, DHCP, DNS, RTSP
Funzioni generali - General function	Dual stream, password protection
Wi-Fi	IEEE802.11b/g/n
PIR	Support PIR and motion detection

DISCOVERY



Collezione in alluminio a LED integrato finitura antracite goffrato

Aluminium collection LED lamp anthracite embossed finish

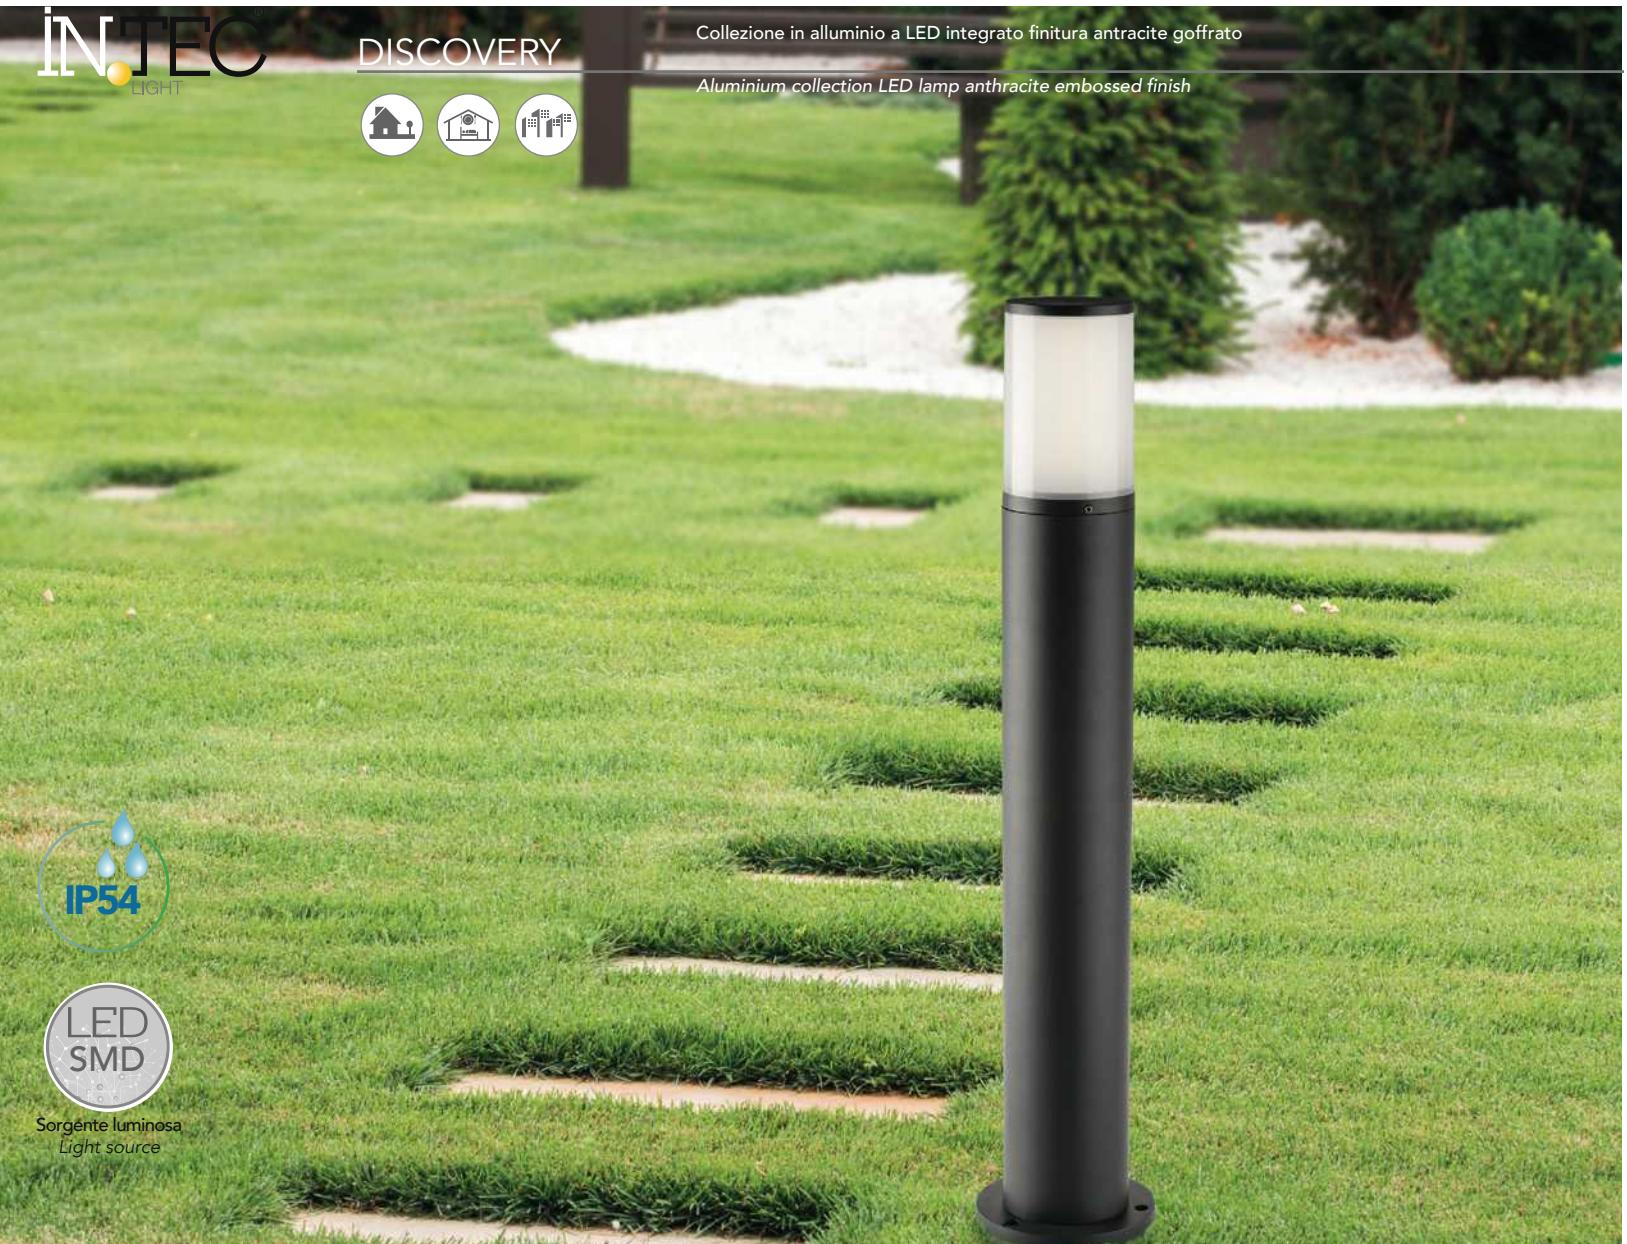Sorgente luminosa
Light source

DISCOVERY

Materiale

Alluminio

Colore

Antracite goffrato

Driver

integrato

Sorgente luminosa

LED SMD 15W

Temperatura colore

4000K

Flusso luminoso

960 Lm

Durata e on/off

25.000 h - >10.000 on/off

Angolo di luce

360°

CRI

>85

Grado IK

IK08

Material

Aluminium

Colour

Embossed anthracite

Driver

Built-in

Light source

LED SMD 15W

Color temperature

4000K

Luminous flux

960 Lm

Lifetime and on/off

25.000 h - >10.000 on/off

Beam angle

360°

CRI


>85

IK degree


IK08

LED-DISCOVERY-AP
8031414877836

13W - 960 LM


Misure - size
dimensioni in mm - size mmLED-DISCOVERY-P65
8031414877850

13W - 960 LM

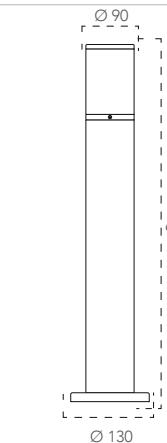Misure - size
dimensioni in mm - size mmLED-DISCOVERY-HUB
8031414877867

13W - 960 LM

• 2X max 15A 250V 2500W

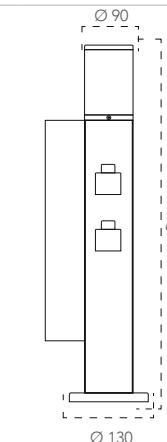Misure - size
dimensioni in mm - size mm

SINTESI



Sorgente luminosa
Light source



Lampada in alluminio a LED integrato
finitura bianco o nero goffrato

Built in aluminium LED lamp white or
black embossed finish

Materiale

Alluminio

Colore

Antracite goffrato - bianco goffrato

Material

Aluminium

Colour

Embossed anthracite - embossed white

Driver

integrato

Driver

built-in

Sorgente luminosa

LED SMD 6W

Light source

LED SMD 6W

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

390 Lm

Luminous flux

390 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

100°

Beam angle

100°

CRI

>80

Grado IK

IK07

CRI

>80

IK degree

IK07

LED-SINTESI-AP NERO
8031414862221




6W

LED-SINTESI-AP BCO
8031414862207



6W

Misure - size
dimensioni in mm - size mm



LED-SINTESI-P NERO
8031414862252




6W

LED-SINTESI-P BCO
8031414862245



6W

Misure - size
dimensioni in mm - size mm

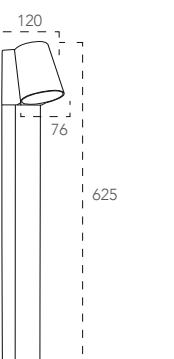

Lanterna in alluminio pressofuso LED
integrato colore nero o bianco goffrato
diffusore in policarbonato


Die cast aluminium lantern built-in
LED black or white embossed finish
with PC diffuser

ALYSON



Sorgente luminosa
Light source

LANT-ALYSON/AP
8031440361552




12W

LANT-ALYSON/AP BCO
8031440361514




12W

Misure - size
dimensioni in mm - size mm



LANT-ALYSON/P1
8031440361569




12W

LANT-ALYSON/P1 BCO
8031440361538



12W

Misure - size
dimensioni in mm - size mm

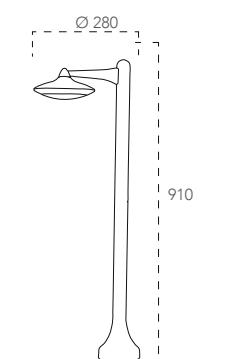

NISMO



Sorgente luminosa
Light source



Collezione in alluminio a LED integrato finitura bianco goffrato

Aluminium collection LED lamp white embossed finish

Materiale

Alluminio

Material

Aluminum

Colore

Bianco goffrato

Colour

Embossed white

Driver

integrato

Driver

Built-in

Sorgente luminosa

LED SMD 13W, 10W

Light source

LED SMD 13W, 10W

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

1020 Lm - 560 Lm

Luminous flux

1020 Lm - 560 Lm

Durata e on/off

25.000 h - >10.000 on/off

Lifetime and on/off

25.000 h - >10.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>85

Grado IK

IK09

CRI

>85

IK degree

IK09



LED-NISMO-AP
8031440361224 13W 1020 Lm

Misure - size
dimensioni in mm - size mm

LED-NISMO-P60
8031440361231 10W 560 Lm

Misure - size
dimensioni in mm - size mm

STATION

Collezione in acciaio finitura antracite.

Stainless steel collection anthracite finish.



E27
Attacco sorgente
Source

I-STATION-E27-SC2
8031414879571


1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Plug 2X max 15A 250V 2500W


Misure - size
dimensioni in mm - size mm

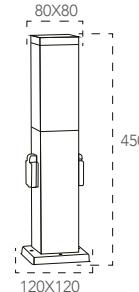

I-STATION-SC2
8031414879564

Plug 2X max 15A 250V 2500W

Misure - size
dimensioni in mm - size mm






Collezione in acciaio inox con diffusore in policarbonato. Finiture bianco, bronzo e nikel spazzolato.
Stainless steel collection with diffuser in PC. White, bronze or brush nickel finish.





Attacco sorgente
Light source



Lampadina
consigliata
Suggested light
bulb

I-ST021
8031421451081

1XE27 MAX 40W IK07

I-TOKYO-AP BRO
8031414864423

1XE27 MAX 40W IK07


I-TOKYO-AP BCO
8031414864447

1XE27 MAX 40W IK07




Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Attacco sorgente
Light source



Lampadina
consigliata
Suggested light
bulb

I-ST022-700
8031414877225

1XE27 MAX 40W IK07

I-TOKYO-P70 BRO
8031414871780

1XE27 MAX 40W IK07


I-TOKYO-P70 BCO
8031414875320

1XE27 MAX 40W IK07




Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

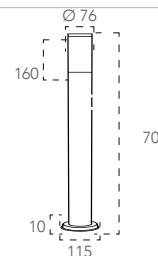

Attacco sorgente
Light source



Lampadina
consigliata
Suggested light
bulb

I-ST022-1100
8031421661084

1XE27 MAX 40W IK07

I-TOKYO-P BRO
8031414864393

1XE27 MAX 40W IK07


I-TOKYO-P BCO
8031414864416

1XE27 MAX 40W IK07



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

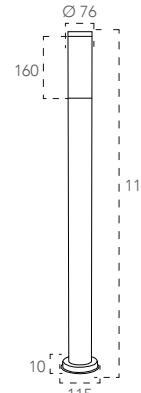

ETNA

Collezione in cemento grigio
Gray concrete collection



I-ETNA-AP4
8031414866762

4XGU10 MAX 10W

IK04




Lampadina non inclusa
Light bulb not included



Connettore IP65
incluso
IP65 connector
included




Attacco sorgente
Light source



Luce biemissione
Biemission light

Misure - size
dimensioni in mm - size mm



PERRET

Collezione in cemento grigio con diffusore in acrilico
Concrete collection gray finish with acrylic diffuser



I-PERRET-AP
8031414871827

1XE14 MAX 10W

IK04



Lampadina non inclusa
Light bulb not included




Connettore IP65
incluso
IP65 connector
included



Attacco sorgente
Light Source

Misure - size
dimensioni in mm - size mm



I-ETNA-P2
8031414867905

2XGU10 MAX 35W

IK05



Lampadina non inclusa
Light bulb not included




Connettore IP65
incluso
IP65 connector
included



Attacco sorgente
Light source

Misure - size
dimensioni in mm - size mm

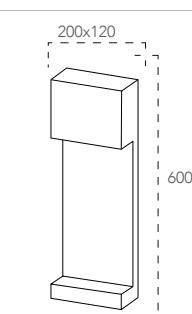

I-PERRET-P60
8031414871834

1XE27 MAX 15W

IK05



Lampadina non inclusa
Light bulb not included




Connettore IP65
incluso
IP65 connector
included



Attacco sorgente
Light Source

Misure - size
dimensioni in mm - size mm

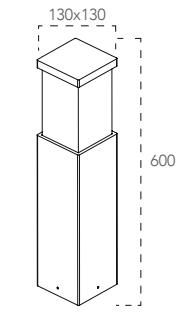




Palo in cemento bianco

Concrete post lamp white concrete colour

I-MASAI-P1
8031414868100

1XR7S MAX 7W

IK05

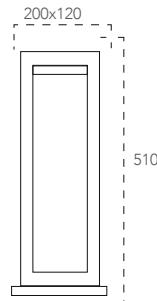Lampadina non inclusa
Light bulb not includedConnettore IP65
incluso
IP65 connector
includedR7S
78mm
Attacco sorgente
Light SourceMisure - size
dimensioni in mm - size mm

GECO DJ



Lampada portatile LED RGBW in polietilene con speaker bluetooth incorporato
LED portable RGBW lamp with speaker bluetooth included polyethylene material



Speaker
Bluetooth



I-GECO-DJ-L25
8031414862542

3W - 180 Lm

Temperatura colore
Colour temperature

RGB 4000K



+

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Speaker 10W Bluetooth 4.0
Distanza connessione max 15 metri
10w speaker bluetooth 4.0
Connection distance max 15 meters


Telecomando infrarossi
IR remote control



230V 50Hz - IP20



5V DC 1A

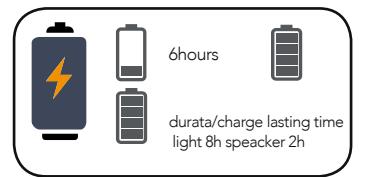

GECO LED

Lampada LED RGBW in polietilene

PE LED RGBW lamp



I-GECO-SFERA-L30
8031414862436 4W 240 LM

I-GECO-SFERA-L40
8031414862443 4W 240 LM

I-GECO-SFERA-L50
8031414862450 4W 240 LM

Modello
items SFERA-L30 SFERA-L40 SFERA-L50

Misure - size
dimensioni in mm -
size mm

Ø 300	Ø 400	Ø 500
-------	-------	-------

Accessori inclusi
Accessories included



IP65

GECO LED

Vaso LED RGBW in polietilene

PE LED RGBW vase



I-GECO-VASO-Q-L
8031414862535 4W 240 LM

I-GECO-VASO-Q-XL
8031414864713 4W 240 LM

Modello
items Q-XL Q-L

Misure - size
dimensioni in mm -
size mm

900	600
380x380	280x280

Accessori inclusi
Accessories included



IP65



IP65

I-GECO-CUBO-L30
8031414862467 4W 240 LM

I-GECO-CUBO-L40
8031414862474 4W 240 LM

I-GECO-CUBO-L50
8031414862481 4W 240 LM

Modello
items CUBO-L30 CUBO-L40 CUBO-L50

Misure - size
dimensioni in mm -
size mm

300x300x300	400x400x400	500x500x500
-------------	-------------	-------------

Accessori inclusi
Accessories included



IP65

I-GECO-VASO-R-L
8031414862528 4W 240 LM

I-GECO-VASO-R-XL
8031414864720 4W 240 LM

Modello
items R-XL R-L

Misure - size
dimensioni in mm -
size mm

900	600
Ø 380	Ø 280

Accessori inclusi
Accessories included




GECO E27



Lampada in polietilene con attacco E27

PE lamp with E27 lampholder

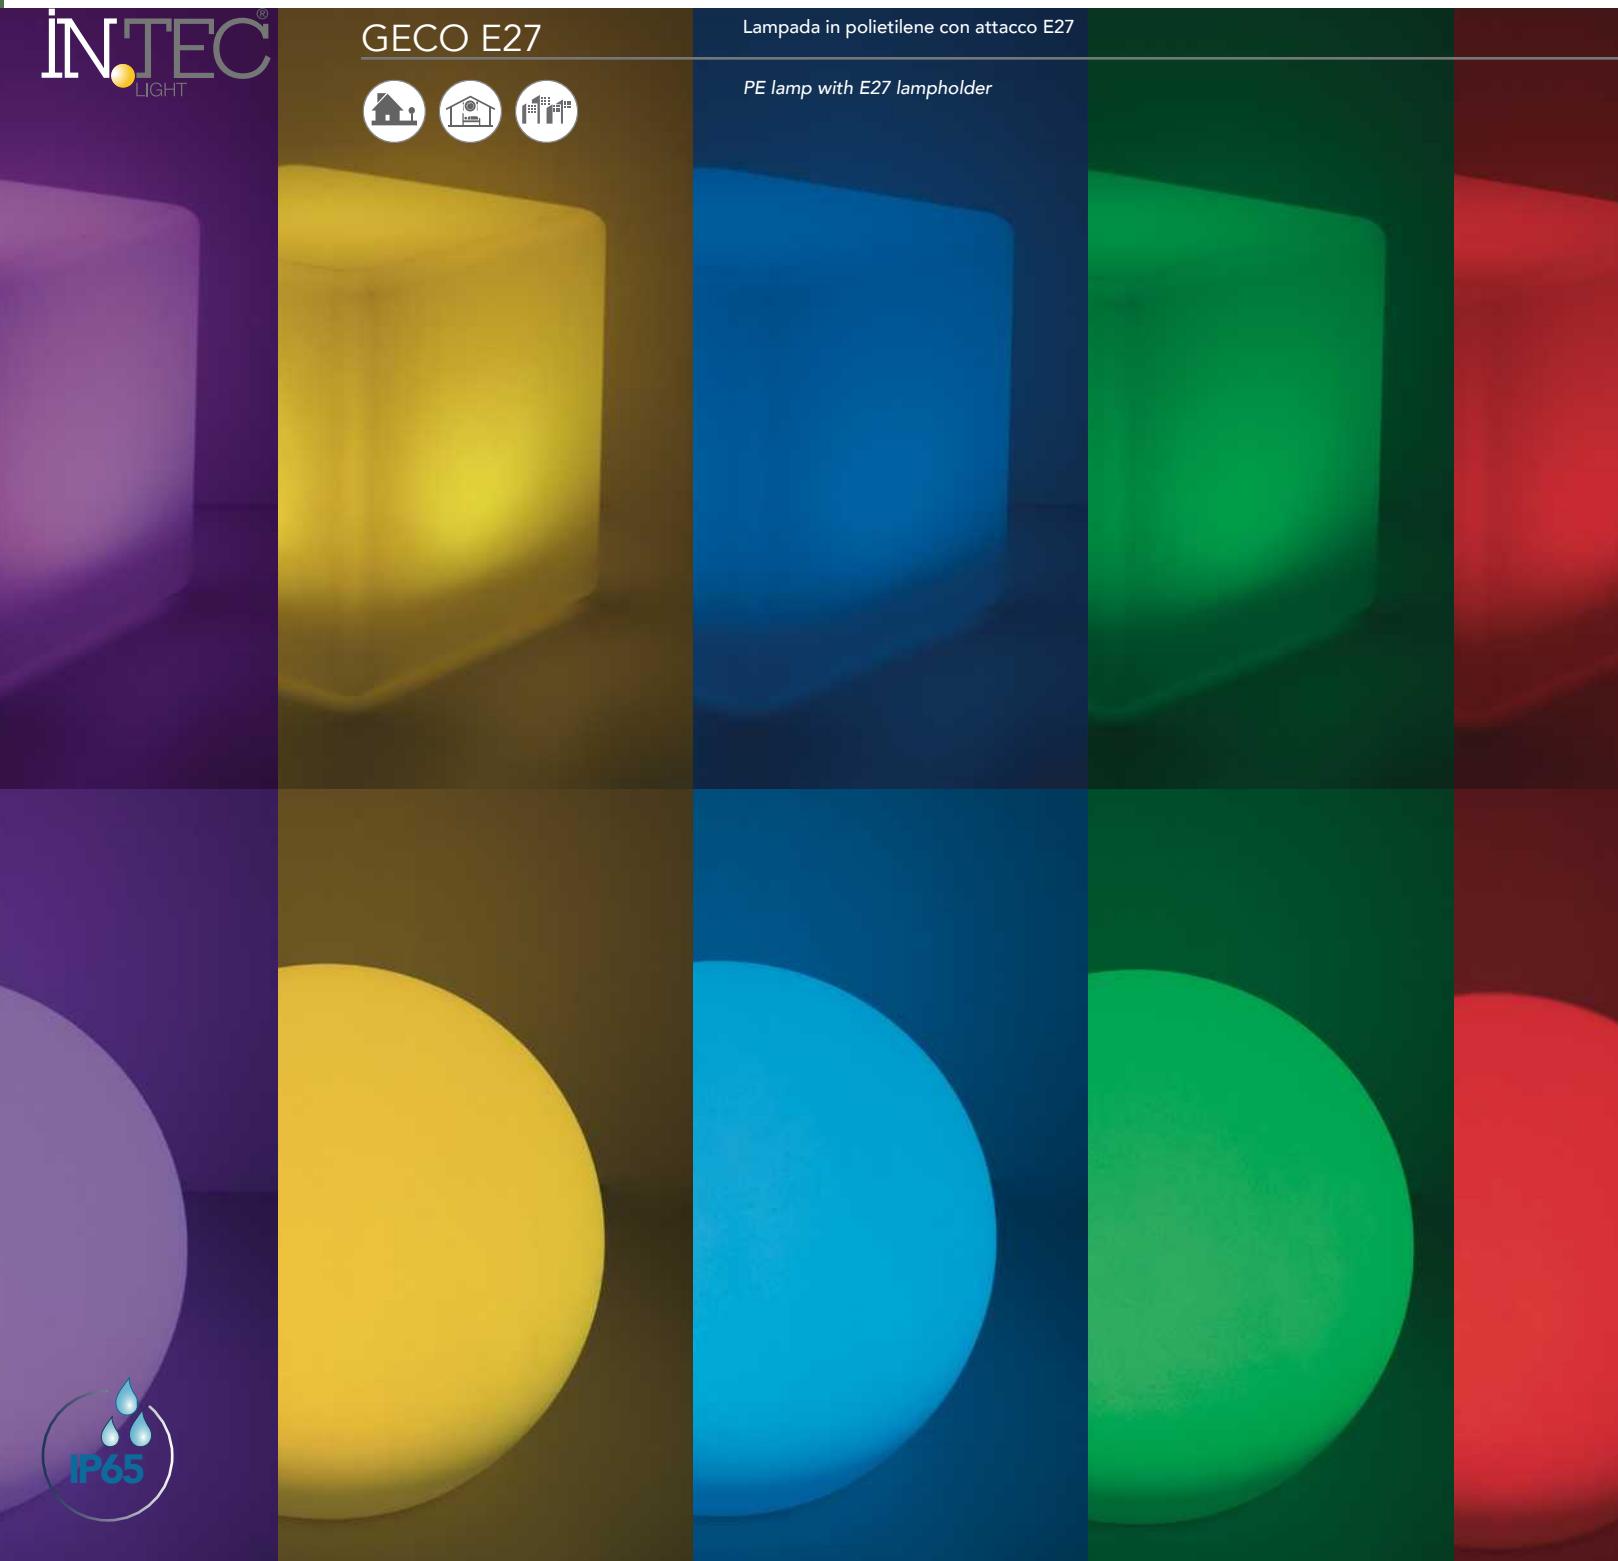

Lampadine LED INTEC consigliate per illuminazione multicolor o bianco dinamico presenti nel catalogo BULBS COLLECTION
Suggested INTEC LED bulbs for multicolor or dynamic white lighting included in the catalogue BULBS COLLECTION



Lampada LED SMART classe A+

Codice	EAN	Watt	RGB	CCT
SMART-E27-RGBCCT	8031414872657	10W		



VOICE
CONTROL
SYSTEM



Lampada LED RGBW classe A+


Codice	EAN	Watt	RGB	IR 4000K CONTROL SYSTEM
I-LUMYA-E27-RGB	8031440354431	10W		



GECO E27

I-GECO-SFERA-S30
8031414864461

1XE27 MAX 42W




Lampadina non inclusa
Light bulb not included

E27

Attacco sorgente
Light Source




Misure - size
dimensioni in mm - size mm



I-GECO-SFERA-S40
8031414864454

1XE27 MAX 42W




Lampadina non inclusa
Light bulb not included

E27

Attacco sorgente
Light Source




Misure - size
dimensioni in mm - size mm




GECO E27



I-GECO-SFERA-E-L30 8031414868476	1XE27 MAX 42W
I-GECO-SFERA-E-L40 8031414868483	1XE27 MAX 42W
I-GECO-SFERA-E-L50 8031414868490	1XE27 MAX 42W
Lampadina non inclusa Light bulb not included	
E27	Attacco sorgente Light Source
Modello items	E-L30 E-L40 E-L50
Misure - size dimensioni in mm - size mm	
Accessori inclusi Accessories included	
	Cavo 2,5 metri con spina shuko 2,5 meters of cable with schuko plug

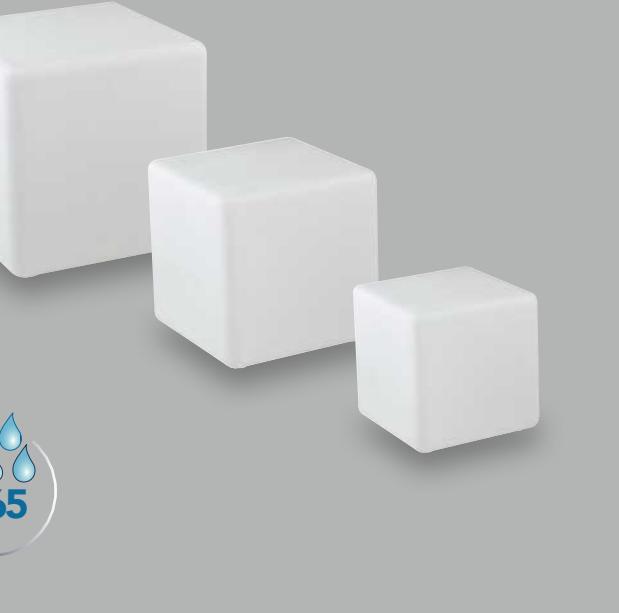

I-GECO-CUBO-E-L30 8031414867943	1XE27 MAX 42W
I-GECO-CUBO-E-L40 8031414868117	1XE27 MAX 42W
I-GECO-CUBO-E-L50 8031414868124	1XE27 MAX 42W
Lampadina non inclusa Light bulb not included	
E27	Attacco sorgente Light Source
Modello items	E-L30 E-L40 E-L50
Misure - size dimensioni in mm - size mm	
Accessori inclusi Accessories included	
	Cavo 2,5 metri con spina shuko 2,5 meters of cable with schuko plug

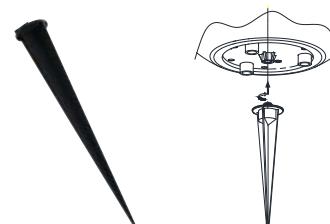

I-GECO-SPK
8031414878437
Picchetto alluminio per lampade GECO E27
Aluminum spike for E27 GECO family

Misure - size
dimensioni in mm - size mm



GECO E27



I-GECO-VASO-E-Q-L 8031414868506	1XE27 MAX 42W
I-GECO-VASO-E-Q-XL 8031414868131	1XE27 MAX 42W
Lampadina non inclusa Light bulb not included	
	E27 Attacco sorgente Light Source
Modello items	E-Q-XL E-Q-L
Misure - size dimensioni in mm - size mm	
Accessori inclusi Accessories included	
	Cavo 2,5 metri con spina shuko 2,5 meters of cable with schuko plug



I-GECO-VASO-E-R-L 8031414868513	1XE27 MAX 42W
I-GECO-VASO-E-R-XL 8031414868520	1XE27 MAX 42W
Lampadina non inclusa Light bulb not included	
	E27 Attacco sorgente Light Source
Modello items	E-R-XL E-R-L
Misure - size dimensioni in mm - size mm	
Accessori inclusi Accessories included	
	Cavo 2,5 metri con spina shuko 2,5 meters of cable with schuko plug



GECO E27

Piantana in polietilene con struttura in metallo antracite o bianco opaco

PE floor lamp with metal structure anthracite or white colour



I-GECO-BAR-PT
8031414868599


1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size

dimensioni in mm - size mm



Attacco sorgente
Light Source

Accessori inclusi
Accessories included



Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug



CE

I-GECO-SFERA-PT30
8031414864430


1XE27 MAX 42W



Lampadina non inclusa
Light bulb not included

Misure - size

dimensioni in mm - size mm

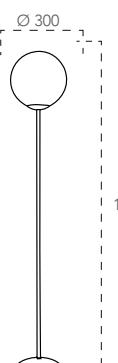

Attacco sorgente
Light Source

Accessori inclusi
Accessories included



Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug



CE





Sorgente luminosa
Light source



Lampada galleggiante
Floating Lamp



GECO LED SOLAR

Lampada portatile LED RGBW in polietilene con autoricarica solare
PE LED portable RGBW lamp with solar self charge




Temperatura colore - colour temperature



I-GECO-CUBO-SOL30
8031414870837

1,5W - 90 Lm


Misure - size
dimensioni in mm - size mm



I-GECO-CUBO-SOL40
8031414870844

1,5W - 90 Lm

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included


Telecomando infrarossi
IR remote control





5V DC 1A - IP20
Solar panel



Carica alimentatore - DC charge

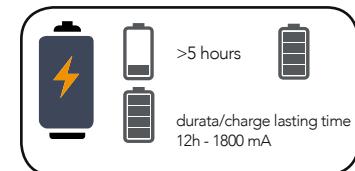

Carica solare - auto solar charge

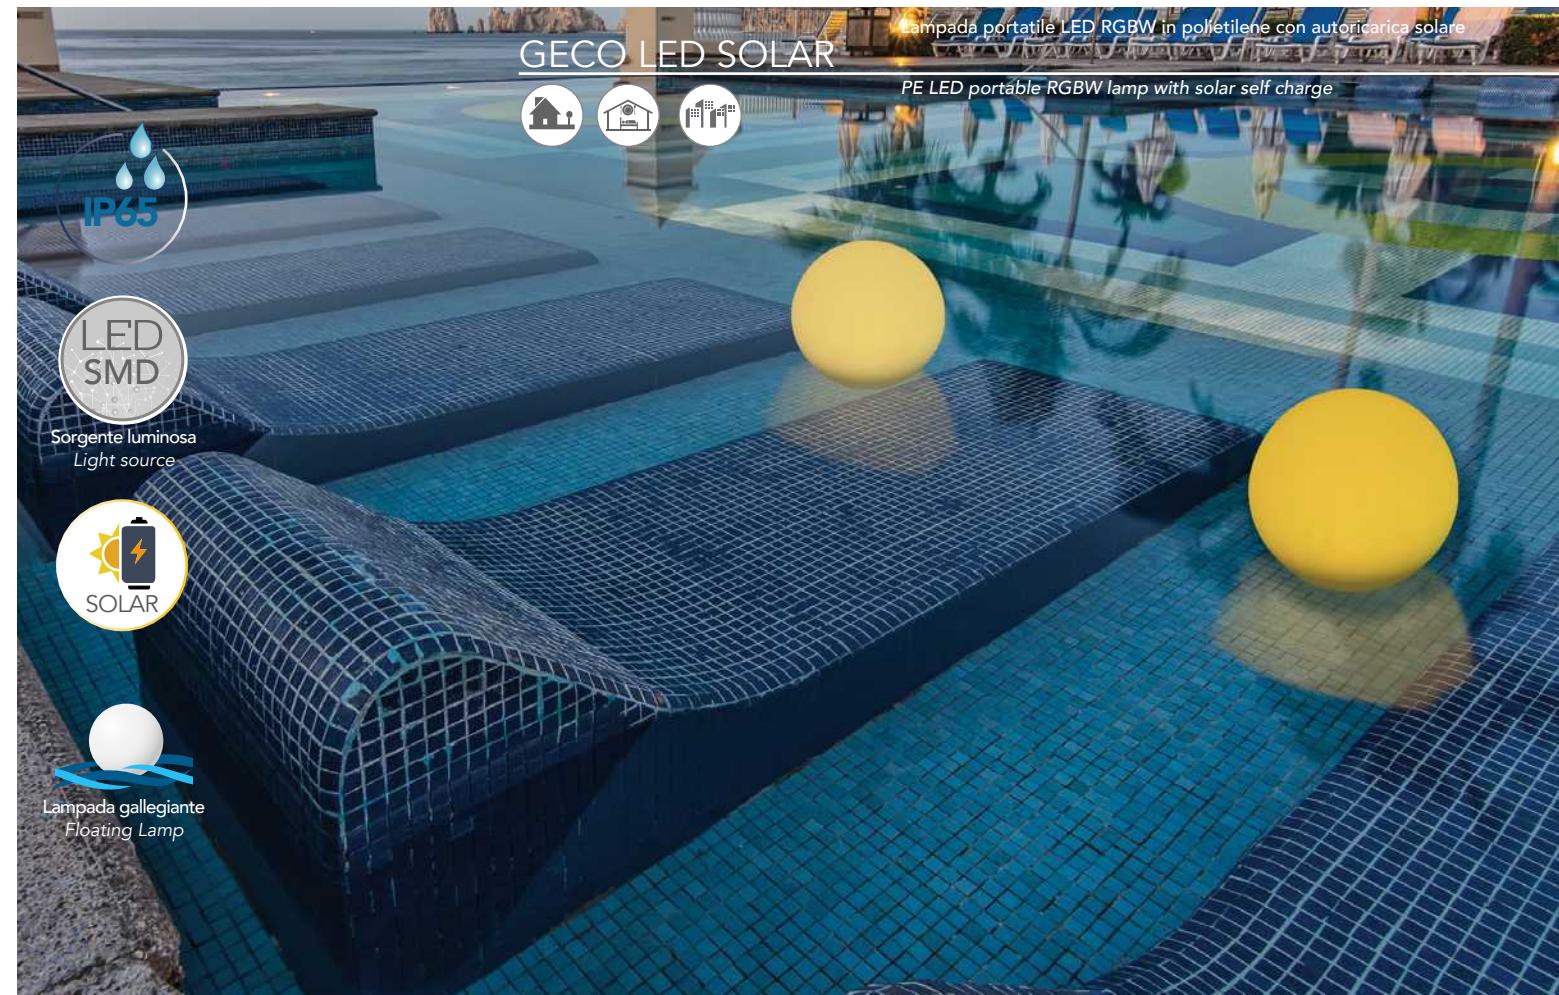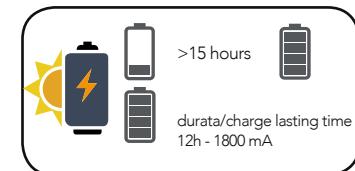

GECO LED SOLAR

Lampada portatile LED RGBW in polietilene con autoricarica solare
PE LED portable RGBW lamp with solar self charge




Temperatura colore - colour temperature



I-GECO-SFERA-SOL30
8031414870868

1,5W - 90 Lm

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included


Telecomando infrarossi
IR remote control




5V DC 1A - IP20
Solar panel



Carica alimentatore - DC charge

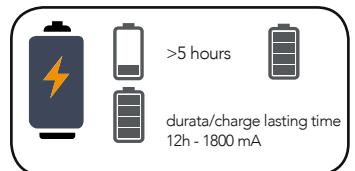

Carica solare - auto solar charge

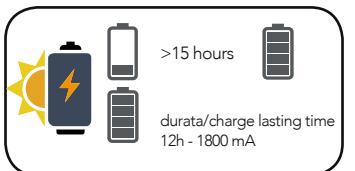



Collezione in metallo nero con diffusore in vetro trasparente
Metal collection black finish with transparent glass diffuser




LANT-MANDALA/AP
8031414862641

1XE27 MAX 60W




Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Attacco sorgente
Source



Lampadina consigliata
Suggested light bulb




LANT-MANDALA/S1
8031414870684

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Attacco sorgente
Source



Lampadina consigliata
Suggested light bulb



YORK

Collezione in alluminio nero con diffusore in polycarbonato


Black aluminium collection with PC diffuser




YORK

LANT-YORK/AP
8031414862757

1XE27 MAX 60W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmAttacco sorgente
SourceLampadina
consigliata
Suggested light
bulbLANT-YORK/S1
8031414862764

1XE27 MAX 60W


Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmAttacco sorgente
SourceLampadina
consigliata
Suggested light
bulb

ORBIT



Lanterna in acrilico PMMA e base in alluminio pressofuso nero

Acrylic PMMA lantern with base in die cast aluminium black finish

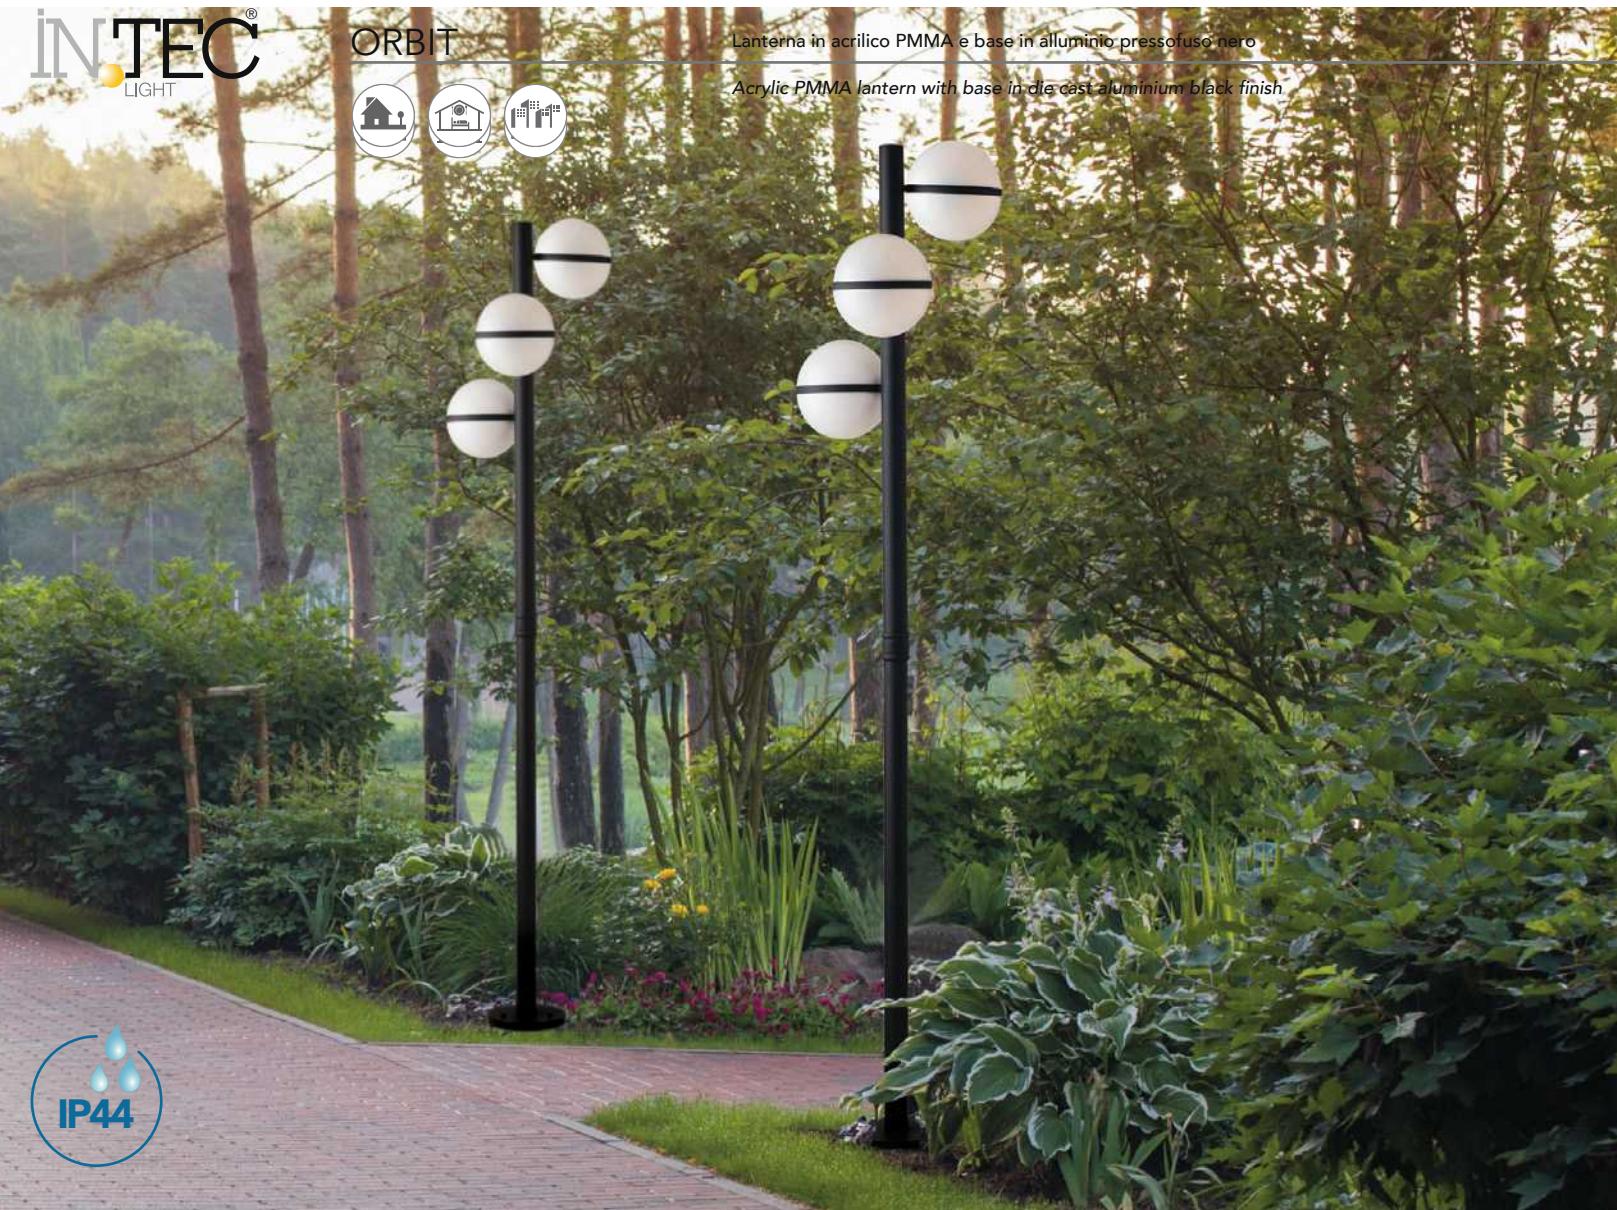


LANT-ORBIT/AP
8031414862658

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-ORBIT/S1
8031414862665

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-ORBIT/L1
8031414866335

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-ORBIT/P1
8031414862689

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

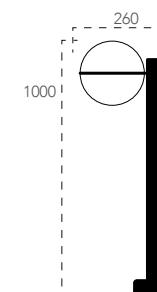


LANT-ORBIT/P3
8031414862702

3XE27 MAX 60W



Lampadina non inclusa
Light bulb not included


Misure - size
dimensioni in mm - size mm

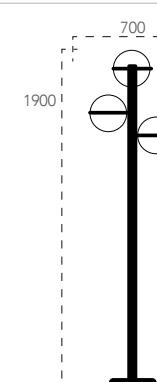

MIRAGE

Lanterna in metallo colore antracite diffusore in vetro trasparente

Metal lantern anthracite finish with clear glass diffuser

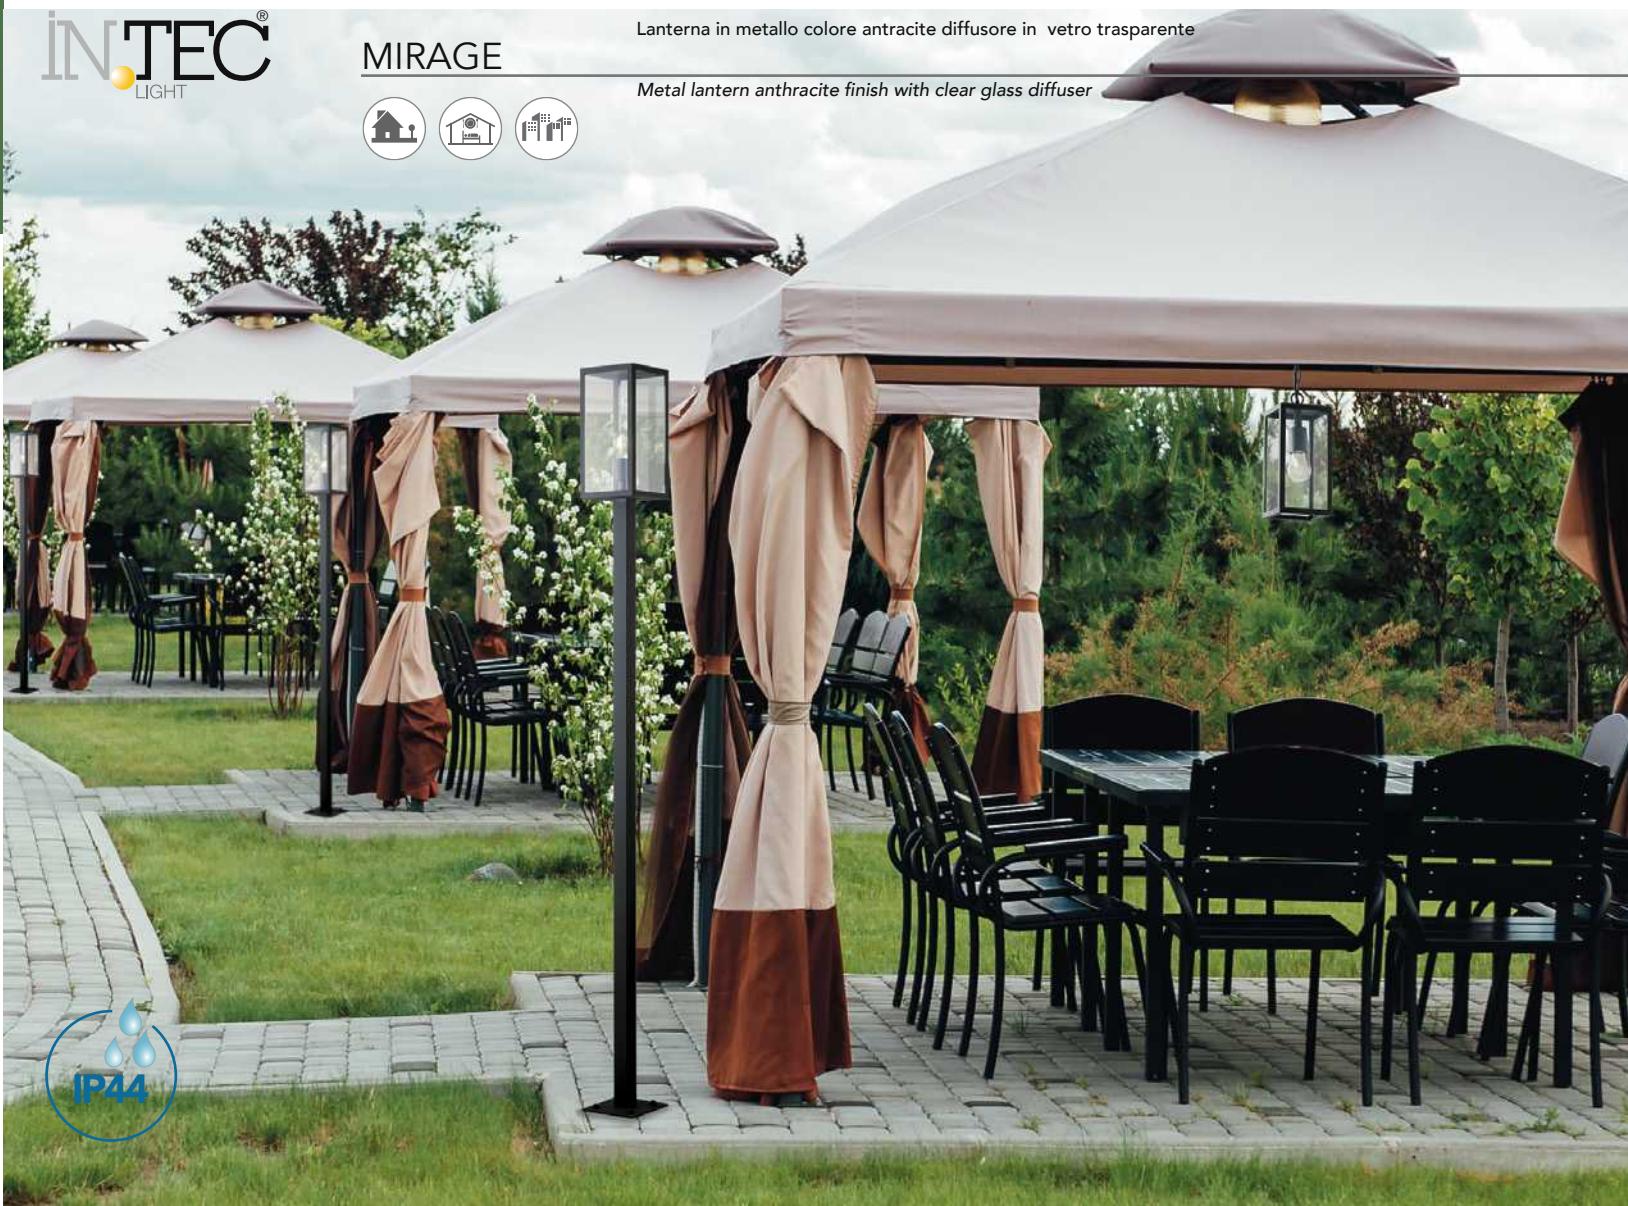


LANT-MIRAGE-AP
8031414867059

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-MIRAGE-S1
8031414867066

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-MIRAGE-L1
8031414869190

1XE27 MAX 60W




Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included




LANT-MIRAGE-P90
8031414869206

1XE27 MAX 60W




Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

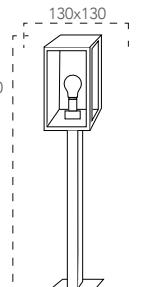

E27
Attacco sorgente
Light Source

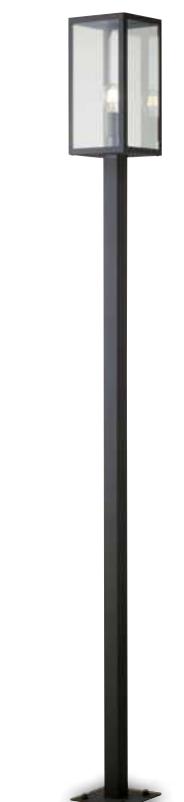


LANT-MIRAGE-P200
8031414869213

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

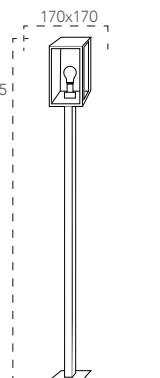

E27
Attacco sorgente
Light Source



PRISMA



Lanterna in alluminio pressofuso colore antracite diffusore in vetro trasparente

Die cast aluminium lantern anthracite finish with clear glass diffuser




LANT-PRISMA/AP1A
8031414867103

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27

Attacco sorgente
Light Source



LANT-PRISMA/AP1B
8031414867073

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

LANT-PRISMA/S1
8031414867080

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included


LANT-PRISMA/P1
8031414869183

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

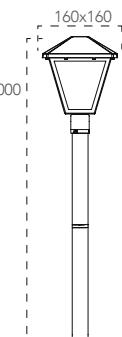

E27

Attacco sorgente
Light Source



LADY



Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato
Die cast aluminium built-in LED lantern black embossed finish with PC diffuser

Materiale

Alluminio pressofuso + policarbonato

Driver

Integrato

Temperatura colore

4000K

Durata e on/off

25.000 h - >15.000 on/off

Grado IK

IK06

CRI

>80

Material

Die cast aluminium + polycarbonate

Driver

Built-in

Color temperature

4000K

Lifetime and on/off

25.000 h - >15.000 on/off

IK degree

IK06

CRI


>80



LANT-LADY/L1
8031440361330

12W 800 LM


Misure - size
dimensioni in mm - size mm



LANT-LADY/AP1A
8031440361316

12W 800 LM


Misure - size
dimensioni in mm - size mm



LANT-LADY/AP1B
8031440352130

12W 800 LM

Misure - size
dimensioni in mm - size mm



LANT-LADY/AP1A-S
8031440361323

12W 800 LM

Accessori integrati
Built in Accessories


sensore di movimento regolabile
adjustable motion sensor



LANT-LADY/S1
8031440352147

12W 800 LM

Misure - size
dimensioni in mm - size mm




CLASSE A



LANT-LADY/P1
8031440361347

12W 800 LM


Misure - size
dimensioni in mm - size mm

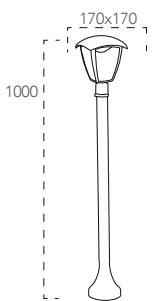

LANT-LADY/P3
8031440352116

3XGX53
3X680 LM

Misure - size
dimensioni in mm - size mm

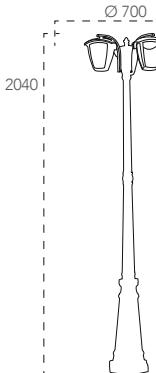

Lampadina LED inclusa
LED light bulb included

Watt	Cri	Lm	K	Durata
9W	80	680	4000	25000h

CLASSE A

CLOE



Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato
Die cast aluminium built-in LED lantern black embossed finish with PC diffuser

Materiale

Alluminio pressofuso + policarbonato

Material

Die cast aluminium + polycarbonate

Driver

Integrato

Driver

Built-in

Temperatura colore

4000K

Color temperature

4000K

Durata e on/off

15.000h - >10.000 on/off

Lifetime and on/off

15.000h - >10.000 on/off

Grado IK

IK06

IK degree

IK06

CRI

>80

CRI


>80



LANT-CLOE/AP1A
8031440361385

12W 800 LM


Misure - size
dimensioni in mm - size mm



LANT-CLOE/AP1B
8031440361392

12W 800 LM

Misure - size
dimensioni in mm - size mm



LANT-CLOE/AP1A-S
8031440361408


12W 800 LM

Accessori integrati
Built in Accessories

sensore di movimento regolabile
adjustable motion sensor




Misure - size
dimensioni in mm - size mm



LANT-CLOE/S1
8031440361422

12W 800 LM

Misure - size
dimensioni in mm - size mm



LANT-CLOE/L1
8031440361415

12W 800 LM


Misure - size
dimensioni in mm - size mm



LANT-CLOE/P1
8031440361439

12W 800 LM


Misure - size
dimensioni in mm - size mm

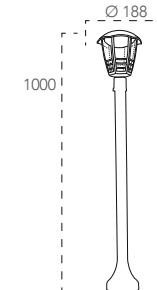

LANT-CLOE/P3
8031440361446

3X12W 2400 LM

Misure - size
dimensioni in mm - size mm

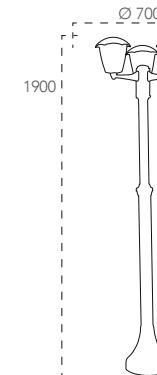

MEGAN



Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato
Die cast aluminium built-in LED lantern black embossed finish with PC diffuser

Materiale

Alluminio pressofuso + policarbonato

Material

Die cast aluminium + polycarbonate

Driver

Integrato

Driver

Built-in

Temperatura colore

4000K

Color temperature

4000K

Durata e on/off

15.000h - >10.000 on/off

Lifetime and on/off

15.000h - >10.000 on/off

Grado IK

IK06

IK degree

IK06

CRI

>80

CRI

>80



LANT-MEGAN/L1
8031440361484

12W 800 LM


Misure - size
dimensioni in mm - size mm



LANT-MEGAN/AP1A
8031440361453

12W 800 LM


Misure - size
dimensioni in mm - size mm



LANT-MEGAN/AP1B
8031440361477

12W 800 LM

Misure - size
dimensioni in mm - size mm




LANT-MEGAN/AP1A-S
8031440361460

12W 800 LM

Accessori integrati
Built in Accessories


sensore di movimento regolabile
adjustable motion sensor

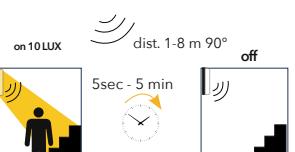

LANT-MEGAN/S1
8031440361507

12W 800 LM


Misure - size
dimensioni in mm - size mm



LANT-MEGAN/P1
8031440361491

12W 800 LM


Misure - size
dimensioni in mm - size mm

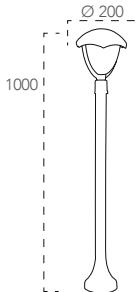

LANT-MEGAN/P3
8031440361606

3X12W 2400 LM

Misure - size
dimensioni in mm - size mm

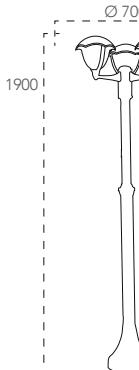

ROMA



Lantern in alluminio pressofuso con diffusore in vetro trasparente
Die-cast aluminium lantern with clear glass diffuser

E27
Attacco sorgente
Light Source

LANT-ROMA/AP1A BCO
8031434661217

1XE27 MAX 60W

LANT-ROMA/AP1A
8031430751172

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-ROMA/AP1B BCO
8031434671216

1XE27 MAX 60W


LANT-ROMA/AP1B
8031430761171

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-ROMA/AP1-S
8031435921235

1XE27 MAX 60W

Accessori integrati
Built-in Accessories



Lampadina non inclusa
Light bulb not included

sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm



LANT-ROMA/S1 BCO
8031434681215

1XE27 MAX 60W


LANT-ROMA/S1
8031430791178

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-ROMA/L1 BCO
8031436951248

1XE27 MAX 60W

LANT-PALETTTO
8031414042203

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-ROMA/P1 BCO
8031436941249

1XE27 MAX 60W


LANT-ROMA/P1
8031430771170

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

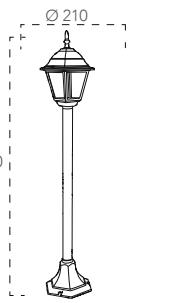


LANT-ROMA/P3
8031430781179

3XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

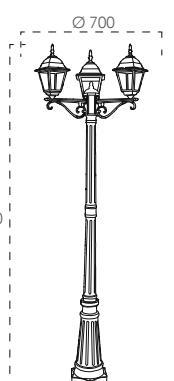



E27

Atacco sorgente
Light Source



IP44



LANT-MILANO/AP1A BCO
8031436931240

1XE27 MAX 60W


LANT-MILANO/AP1A
8031436921241

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-MILANO/AP1B BCO
8031436911242

1XE27 MAX 60W


LANT-MILANO/AP1B
8031436901243

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-MILANO/S1 BCO
8031436851234

1XE27 MAX 60W


LANT-MILANO/S1
8031436841235

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-MILANO/L1 BCO
8031436891247

1XE27 MAX 60W

LANT-MILANO/L1
8031436881248

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-MILANO/P1 BCO
8031436871232

1XE27 MAX 60W


LANT-MILANO/P1
8031436971246

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

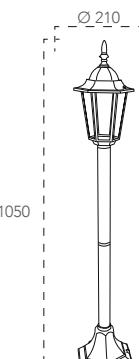



LANT-ROMA-HEAD21
8031414878512

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-MILANO-HEAD23
8031414878529

1XE27 MAX 60W




Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Lanterne in alluminio pressofuso nero pennellato oro con diffusore in vetro cattedrale
Diecast aluminium lantern black brush gold finish with cathedral glass diffuser

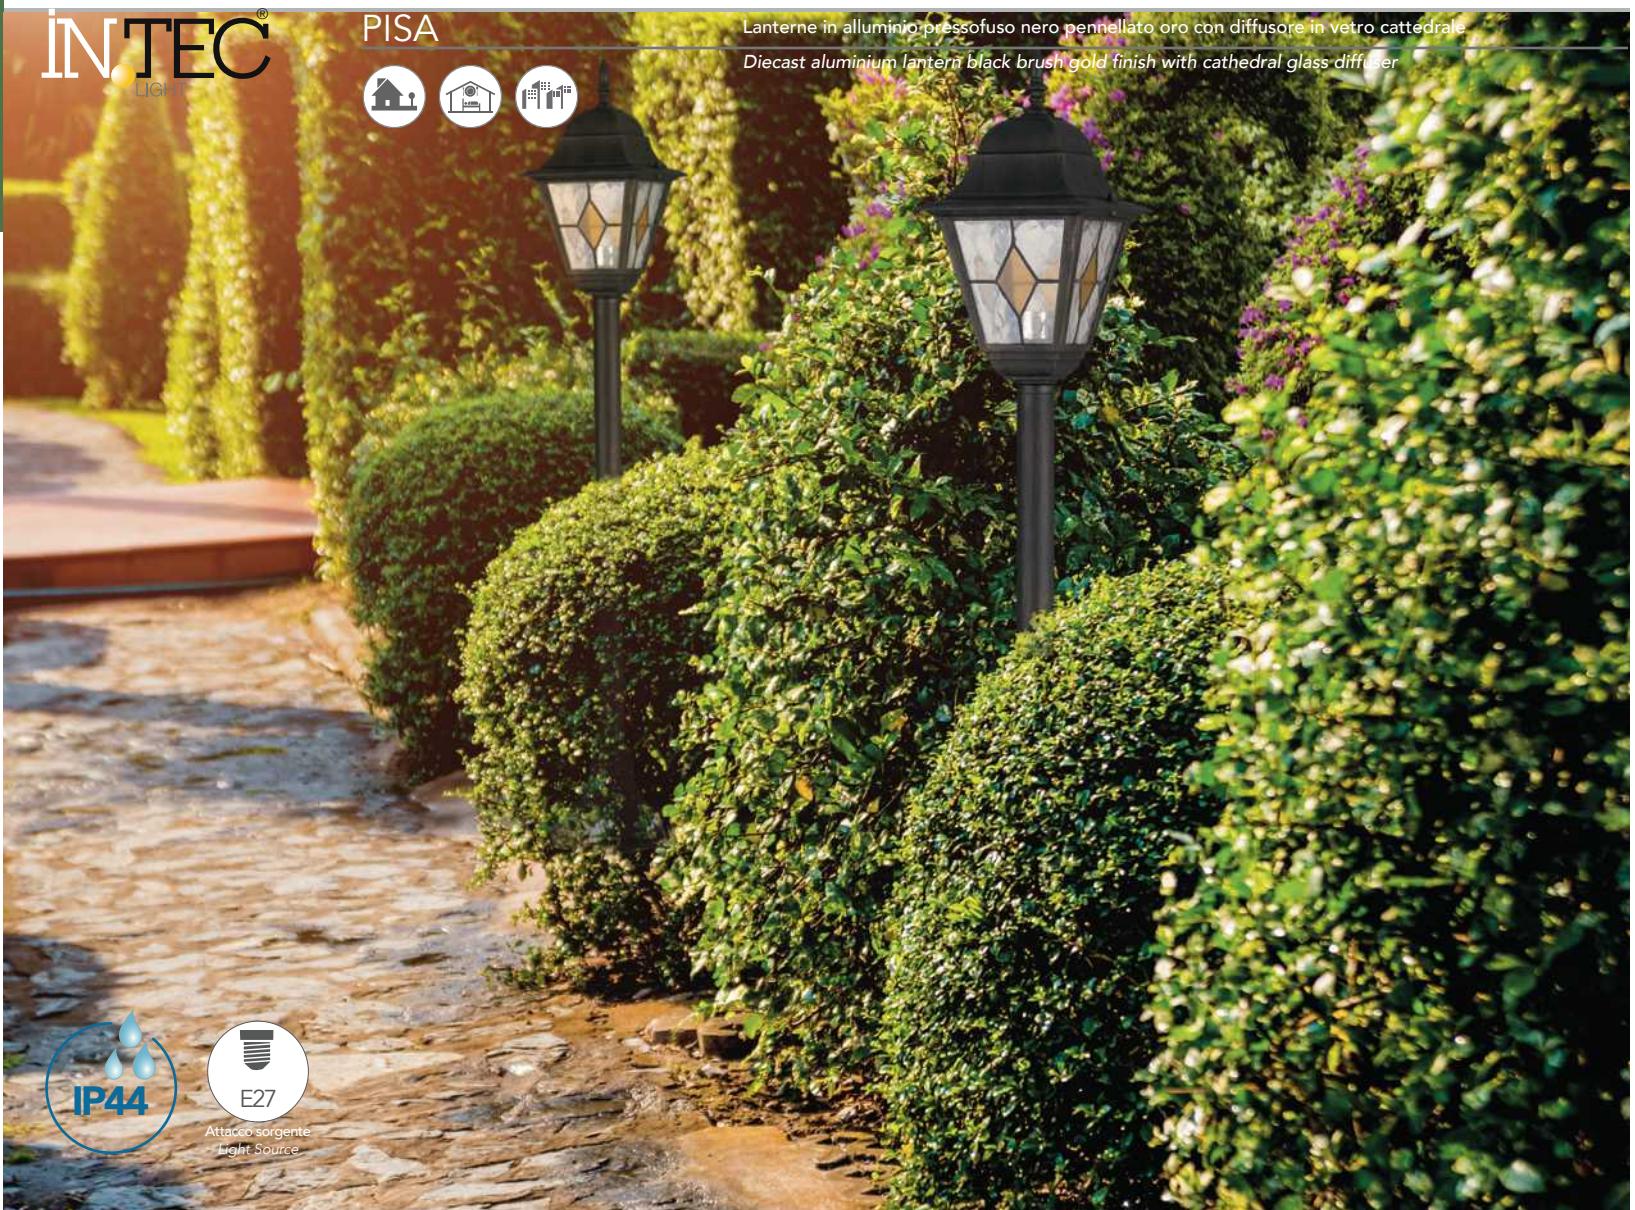

Attacco sorgente
Light Source




LANT-PISA/S1
8031435541228

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-PISA/L1
8031435551227

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-PISA/AP1A
8031435561226

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-PISA/AP1B
8031435571225

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-PISA/P1
8031435531229

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included


Misure - size
dimensioni in mm - size mm

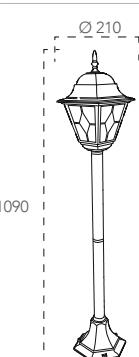

FIRENZE

Lanterne in alluminio pressofuso nero pennelato argento con diffusore in vetro trasparente

Diecast aluminium lantern black brush silver with clear glass diffuser

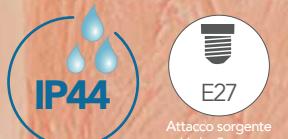

Attacco sorgente
Light Source




LANT-FIRENZE/AP1A
8031430701177

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-FIRENZE/AP1B
8031430711176

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-FIRENZE/S1
8031430741173

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-FIRENZE/P1
8031430721175

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

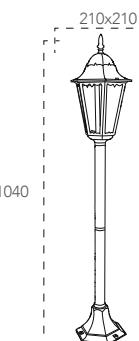


LANT-FIRENZE/P3
8031430731174

3XE27 MAX 60W




Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

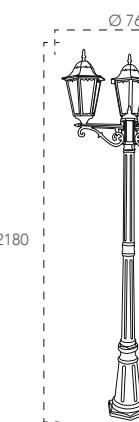



Lantere in alluminio pressofuso nero pennellato verde con diffusore in vetro trasparente
Diecast aluminium lantern black brush green with clear glass diffuser

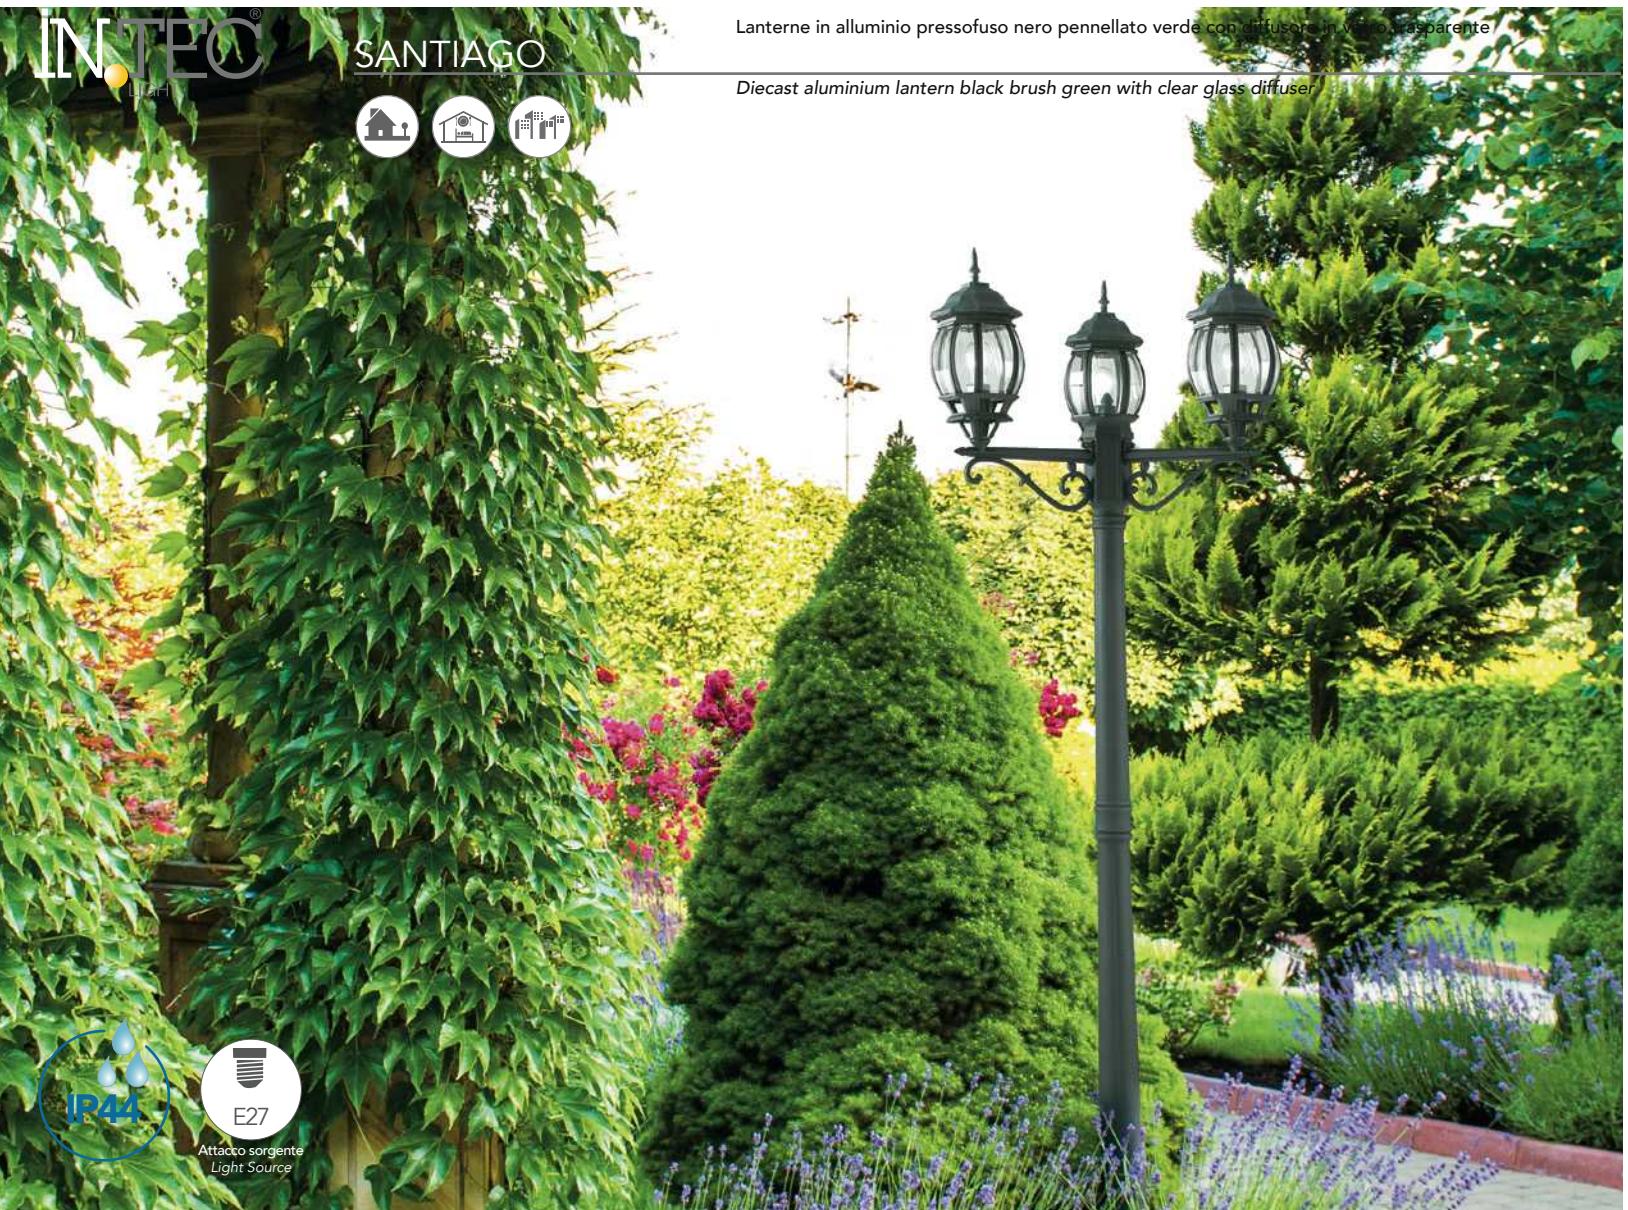


Attacco sorgente
Light Source

LANT-SANTIAGO/AP1A
8031430801174 1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-SANTIAGO/AP1B
8031430811173 1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-SANTIAGO/S1
8031430841170 1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-SANTIAGO/P1
8031430821172 1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

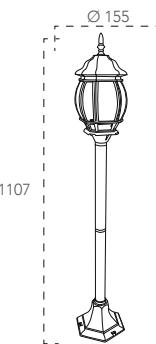


LANT-SANTIAGO/P3
8031430831171 3XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

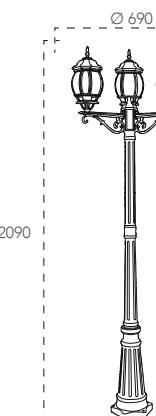

VENEZIA




Lantere in alluminio pressofuso con finiture in ottone rame con diffusore in policarbonato trasparente
Aluminium die-cast lantern with copper colour trim and clear polycarbonate diffuser




E27

Attacco sorgente
Light sourceLANT-VENEZIA-AP1
8031440312004


1XE27 MAX 60W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmLANT-VENEZIA-AP1B
8031440311991

1XE27 MAX 60W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmLANT-VENEZIA-S1
8031440313285

1XE27 MAX 60W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm


CE

LANT-VENEZIA-L1
8031440311984


1XE27 MAX 60W

Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmLANT-VENEZIA-P1
8031440313308

1XE27 MAX 60W

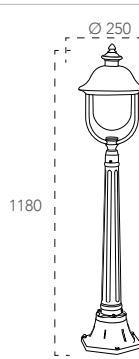Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mmLANT-VENEZIA-P3
8031440313292


3XE27 MAX 60W

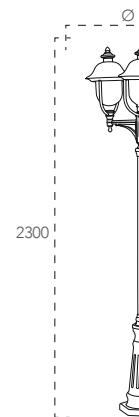Lampadina non inclusa
Light bulb not includedMisure - size
dimensioni in mm - size mm

PAVIA

Lanterne in alluminio pressofuso nero goffrato con diffusore in acrilico trasparente

Die-cast aluminium lantern in embossed black colour with clear acrylic diffuser

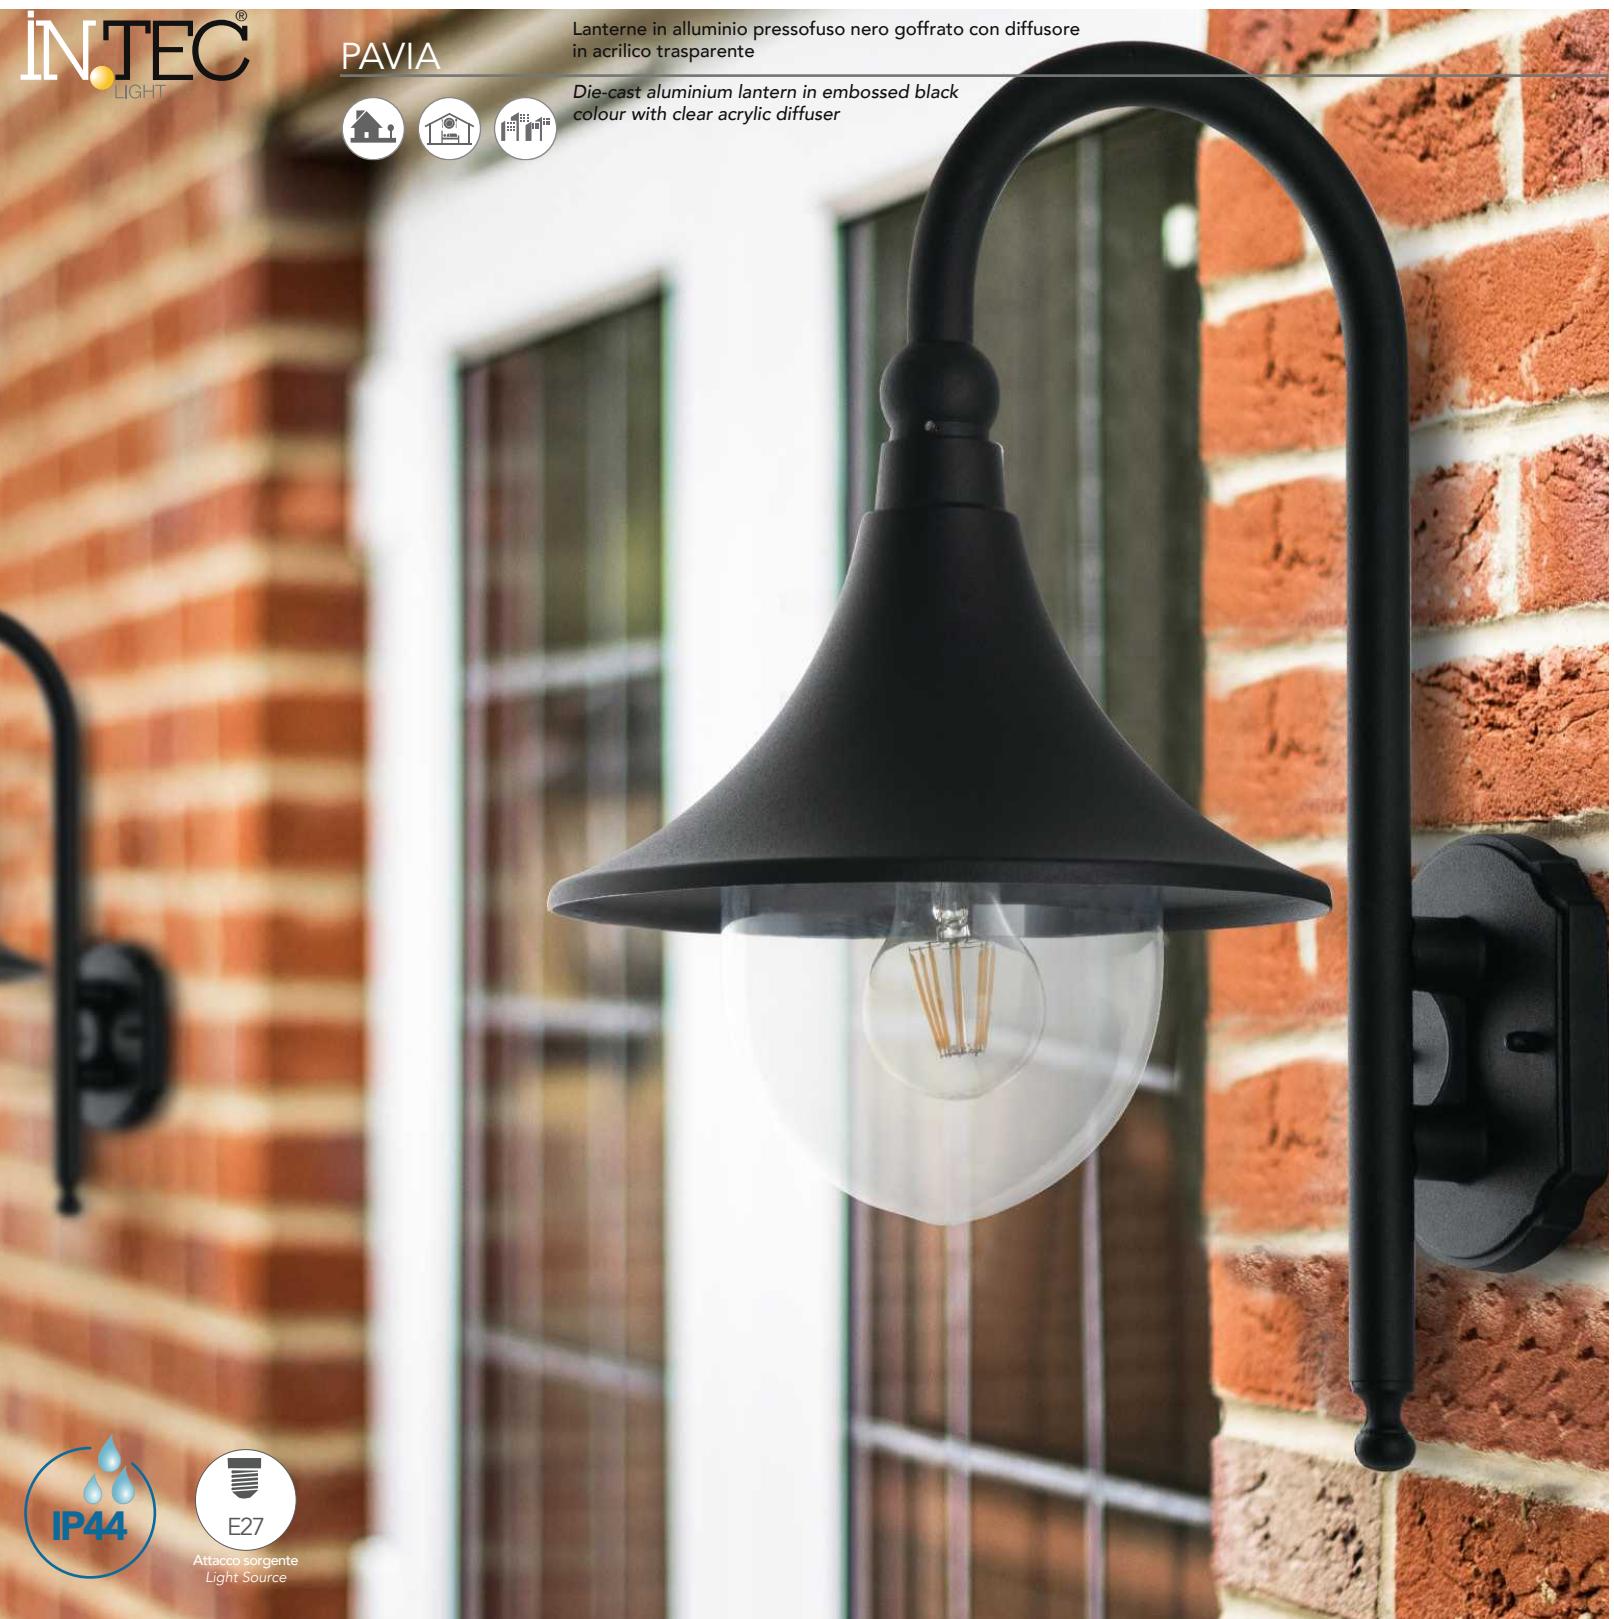

Attacco sorgente
Light Source




LANT-PAVIA-AP1
8031440312028

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LANT-PAVIA-S1
8031440312042

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




LANT-PAVIA-P1
8031440312035

1XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

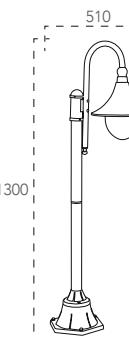


LANT-PAVIA-P3
8031440312011

3XE27 MAX 60W



Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

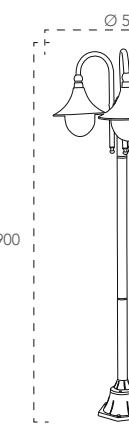

BARRET



Segnapassi incasso a pavimento o parete

Inground and wall recessed light

Materiale

Alluminio

Colore

Finitura nickel

Sorgente luminosa

LED SMD 1W

Driver

350mA 3,5V corrente costante non incluso

Temperatura colore

3000K - 4000K

Flusso luminoso

80 Lm

Grado IP

IP67

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

40°

CRI

>80

Material

Aluminium

Colour

Nickel finish

Light source

LED SMD 1W

Driver

350mA 3,5V constant current not included

Color temperature

3000K - 4000K

Luminous flux

80 Lm

IP degree

IP67

Lifetime and on/off

25.000 h ~ >10.000 on/off

Beam angle

40°

CRI

>80

SUBWAY



Segnapassi incasso a pavimento o parete

Inground and wall recessed light

Materiale

Alluminio

Colore

Finitura nickel

Sorgente luminosa

LED SMD 3W

Driver

DC 12-24V tensione costante non incluso

Temperatura colore

3000K 4000K BLU

Flusso luminoso

135 Lm - 173 Lm - 53 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Angolo di luce

15°

CRI

>80

Grado IK

IK07

Material

Aluminium

Colour

Nickel finish

Light source

LED SMD 3W

Driver

DC 12-24V constant voltage not included

Colour temperature

3000K 4000K BLU

Luminous flux

135 Lm - 173 Lm - 53 Lm

Life time and on/off

25.000 h ~ >15.000 on/off

Beam angle


15°

CRI

>80

IK degree

IK07

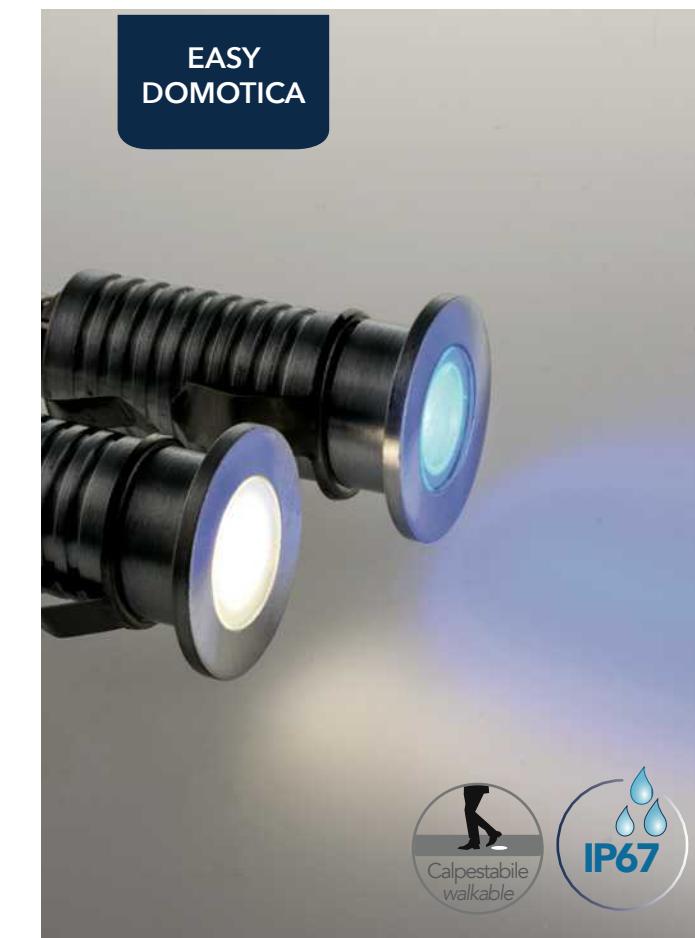

CLASSE A+ CE EMC



Accessori inclusi
Accessories included

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-BARRET-R24

LED-BARRET-R24C
8031440355070

1W 3,5V DC


LED-BARRET-R24
8031440364416

1W 3,5V DC

Misure - size
dimensioni in mm - size mm



x1
Cassetta di derivazione
Recessed box



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-BARRET-R24

LED-BARRET-R24C
8031440355070

1W 3,5V DC


LED-BARRET-R24
8031440364416

1W 3,5V DC



Connessione in serie
Serie connection system

Driver pag. 567

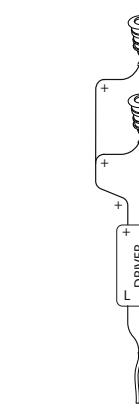

Connessione in parallelo
Serie connection system

Driver pag. 567
Controller pag. 574



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-SUBWAY-R1M
8031414877263

173 LM

12-24V

LED-SUBWAY-R1C
803141487342

135 LM

12-24V

LED-SUBWAY-R1B
8031414877270

53 LM

12-24V

Foro - cut out
dimensioni in mm - size mm

Ø 24

Misure - Size
dimensioni in mm - size mm

Ø 32

Accessori inclusi
Accessories included

Cavo 1m incluso
Included 1m cable

RIDER



Kit 6 pz segnapassi incasso a pavimento o parete

Kit 6pcs inground and wall recessed light

Materiale

Lega di zinco

Colore

Finitura silver

Sorgente luminosa

LED SMD 6x0,6W

Driver

Driver incluso 12V 6W DC

Temperatura colore

4000K

Flusso luminoso

100 Lm

Grado IP

IP65

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

105°

CRI

>80

Material

Zinc alloy

Colour

Nickel finish

Light source

LED SMD 6x0,6W

Driver

Driver included 12V 6W DC

Colour temperature

4000K

Luminous flux

100 Lm

IP degree

IP65

Lifetime and on/off

25.000 h ~ >10.000 on/off

Beam angle

105°

CRI

>80

RIDER



Kit 6 pz segnapassi incasso a pavimento o parete

Kit 6pcs inground and wall recessed light

Materiale

Acciaio

Colore

Acciaio

Sorgente luminosa

LED SMD 6x0,6W

Driver

Driver incluso 12V 6W DC

Temperatura colore

4000K

Flusso luminoso

100 Lm

Grado IP

IP67

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

Lifetime and on/off


25.000 h ~ >10.000 on/off

Beam angle

120°


CRI

>80

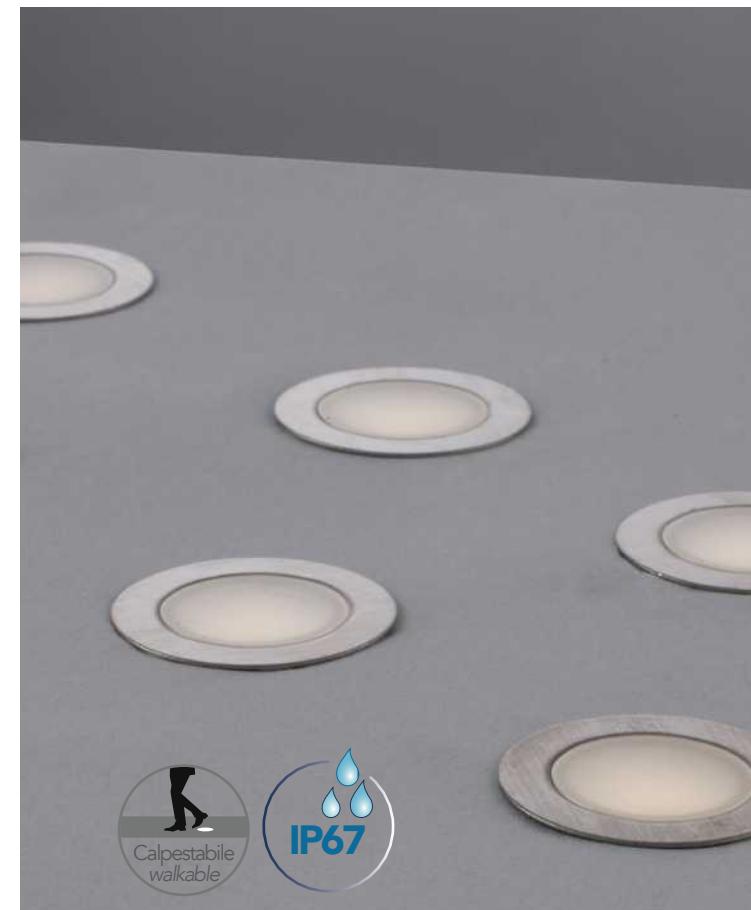

CLASSE A CE EMC


CLASSE A CE EMC

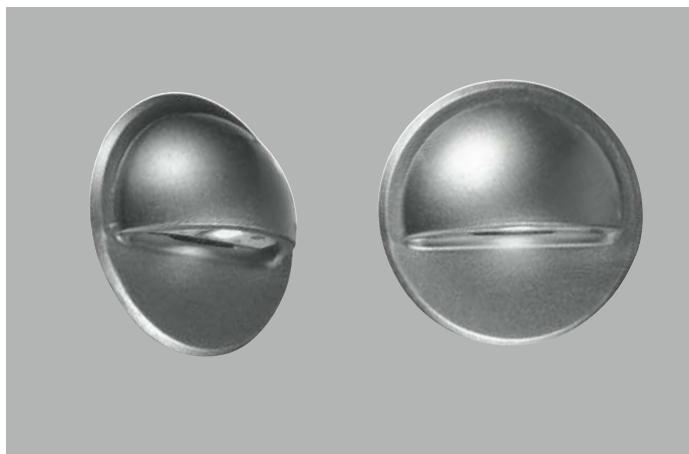

Accessori inclusi
Accessories included




FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

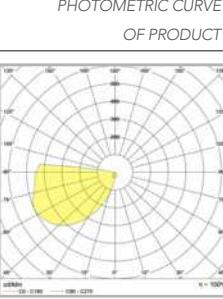


LED-RIDER-R6-DIR
8031439921279

6X0,6W

Misure - size
dimensioni in mm -
size mm

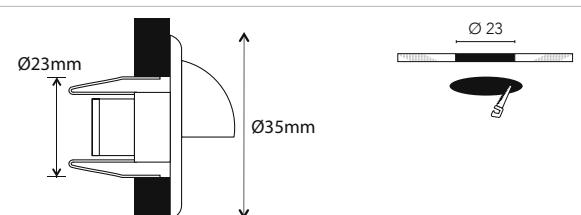

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

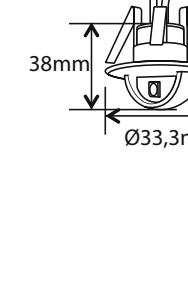


LED-RIDER-R6-DIR


LED-RIDER-R6
8031436141236

6X0,6W

Misure - size
dimensioni in mm -
size mm

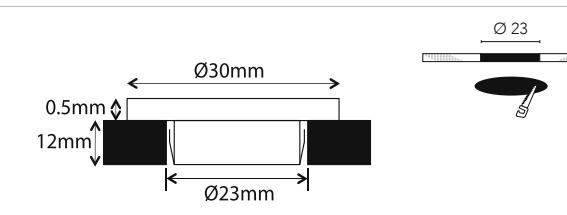

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

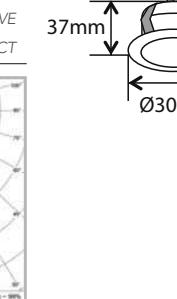

LED-RIDER-R6

RIDER



Kit 6 pz segnapassi incasso a pavimento o parete

Kit 6pcs inground and wall recessed light



Materiale

Acciaio

Material

Steel

Colore

Finitura nickel

Colour

Nickel finish

Sorgente luminosa

LED SMD 6x0,6W

Source light

LED SMD 6x0,6W

Driver

Driver incluso 12V 6W

Driver

Driver included 12V 6W

Temperatura colore



Colour temperature



Grado IP

IP67

IP degree

IP67

Durata e on/off

25.000 h ~ >10.000 on/off

Lifetime and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

120°

Beam angle

120°

CRI

>80

CRI

>80






Accessori inclusi
Accessories included



LED-RIDER-R6-RGB
8031439871260

6X0,6W

Misure - size
dimensioni in mm - size mm

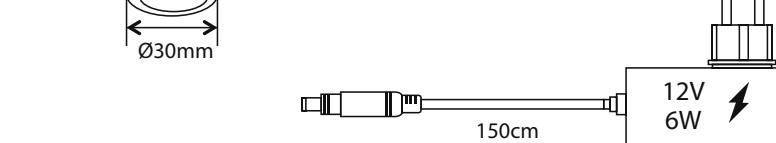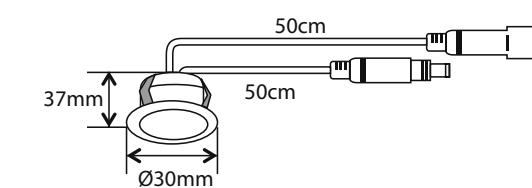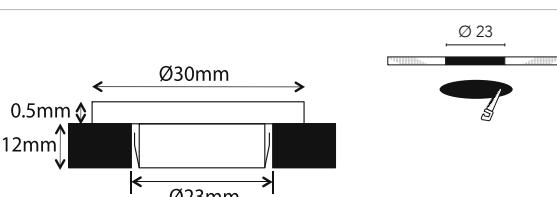


IMPACT




Segnapassi incasso a pavimento o parete

Inground and wall recessed light

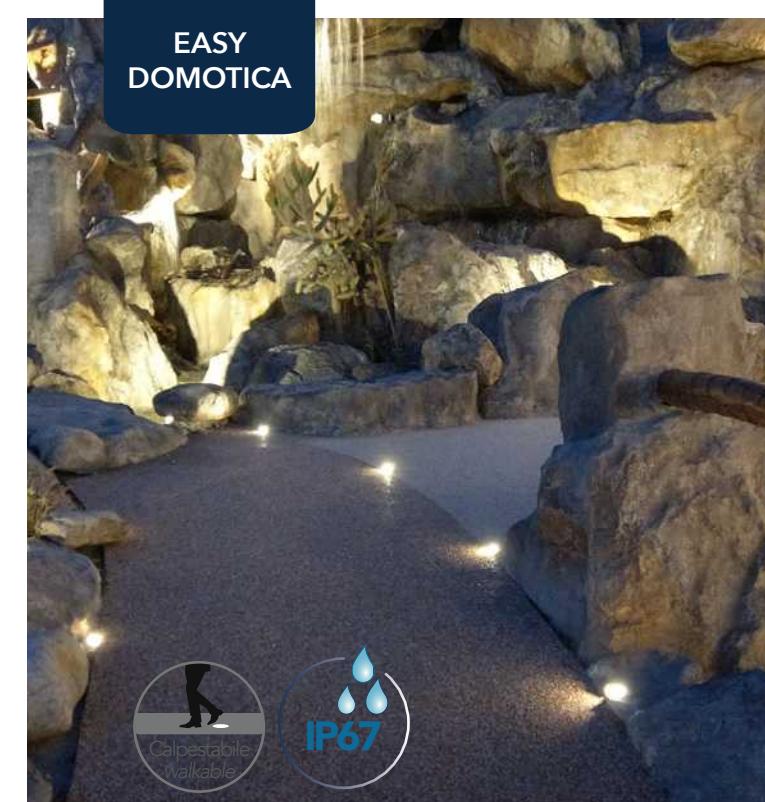

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

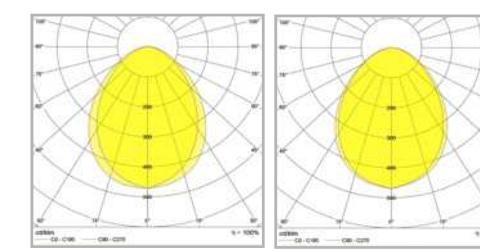

LED-IMPACT24V-R1C LED-IMPACT24V-R1M

LED-IMPACT24V-R1C
8031414879298

3W DC 24V

LED-IMPACT24V-R1M
8031414879304

3W DC 24V

Misure - size
dimensioni in mm - size mm




Accessori inclusi
Accessories included

x1 Cassetta di derivazione
Recessed box



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

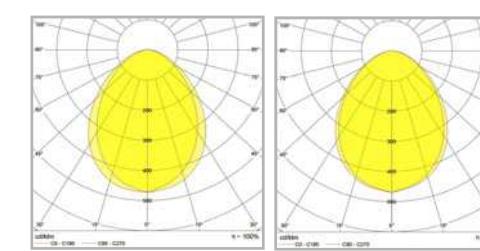

LED-IMPACT24V-Q1C LED-IMPACT24V-Q1M


LED-IMPACT24V-Q1C
8031414879311

3W DC 24V

LED-IMPACT24V-Q1M
8031414879328

3W DC 24V

Misure - size
dimensioni in mm - size mm

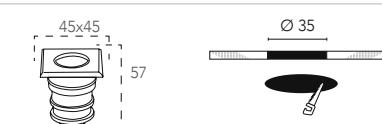

Accessori inclusi
Accessories included

x1 Cassetta di derivazione
Recessed box

Connessione in parallelo Driver pag. 567
Serie connection system Controller pag. 574

STEP



Segnapassi incasso a pavimento o parete

Inground and wall recessed light

EASY
DOMOTICA



Materiale

Alluminio

Material

Aluminium

Colore

Finitura silver

Colour

Silver finish

Sorgente luminosa

LED SMD 3W

Light source

LED SMD 3W

Driver

DC 24V tensione costante non incluso

Driver

DC 24V constant voltage not included

Temperatura colore

3000K - 4000K

Colour temperature

3000K - 4000K

Flusso luminoso

180 Lm

Luminous flux

180 Lm

Grado IP

IP67

IP degree

IP67

Durata e on/off

25.000 h ~ >10.000 on/off

Lifetime and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

105°

Beam angle

105°

CRI

>80

CRI

>80

Grado IK

IK10

IK degree

IK10

CLASSE A+ CE EMC

STEP



Segnapassi incasso a pavimento o parete

Inground and wall recessed light



Materiale

Alluminio

Material

Aluminium

Colore

Finitura silver

Colour

Silver finish

Sorgente luminosa

LED SMD 3W

Light source

LED SMD 3W

Driver

DC 24V tensione costante non incluso

Driver

DC 24V constant voltage not included

Temperatura colore

3000K - 4000K

Colour temperature

3000K - 4000K

Flusso luminoso

180 Lm

Luminous flux

180 Lm

Grado IP

IP67

IP degree

IP67

Durata e on/off

25.000 h ~ >10.000 on/off

Lifetime and on/off

25.000 h ~ >10.000 on/off

Angolo di luce

105°

Beam angle

105°

CRI

>80

CRI

>80

Grado IK

IK10

IK degree

IK10


CLASSE A+ CE EMC



LED-STEP24V-R4C 3W DC 24V
8031414879274


LED-STEP24V-R4M 3W DC 24V
8031414879281

Misure - size
dimensioni in mm - size mm

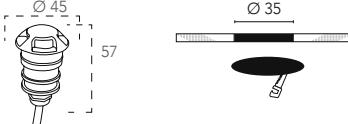

Accessori inclusi
Accessories included

x1 Cassetta di derivazione
Recessed box

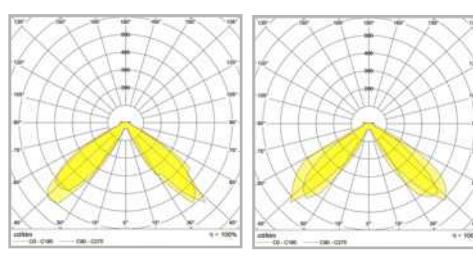

Connessione in parallelo
Serie connection system


Driver pag. 567
Controller pag. 574



LED-STEP24V-R1C 3W DC 24V
8031414879250


LED-STEP24V-R1M 3W DC 24V
8031414879267

Misure - size
dimensioni in mm - size mm

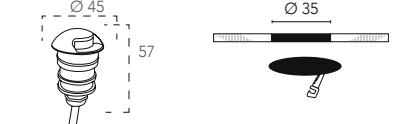

Accessori inclusi
Accessories included

x1 Cassetta di derivazione
Recessed box

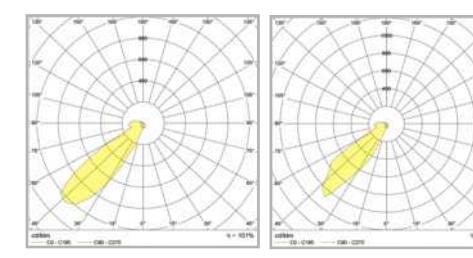

Connessione in parallelo
Serie connection system

Driver pag. 567
Controller pag. 574

WALK

Faro calpestabile da incasso a pavimento



Materiale

Acciaio inox

Sorgente luminosa

LED COB 3W- 8W - 12W

Driver

integrato

Temperatura colore

4000K

Flusso luminoso

160 Lm - 450 Lm - 750 Lm

Durata e on/off

25.000 h >10.000 on/off

Angolo di luce

30°

CRI

>80

Grado IK

IK10

Walkable stainless steel built-in LED light

Material

Stainless steel

Light source

LED COB 3W- 8W - 12W

Driver

Built-in

Colour temperature

4000K

Luminous flux

160 Lm - 450 Lm - 750 Lm

Lifetime and on/off

25.000 h >10.000 on/off

Beam angle


30°

CRI

>80

IK degree

IK10

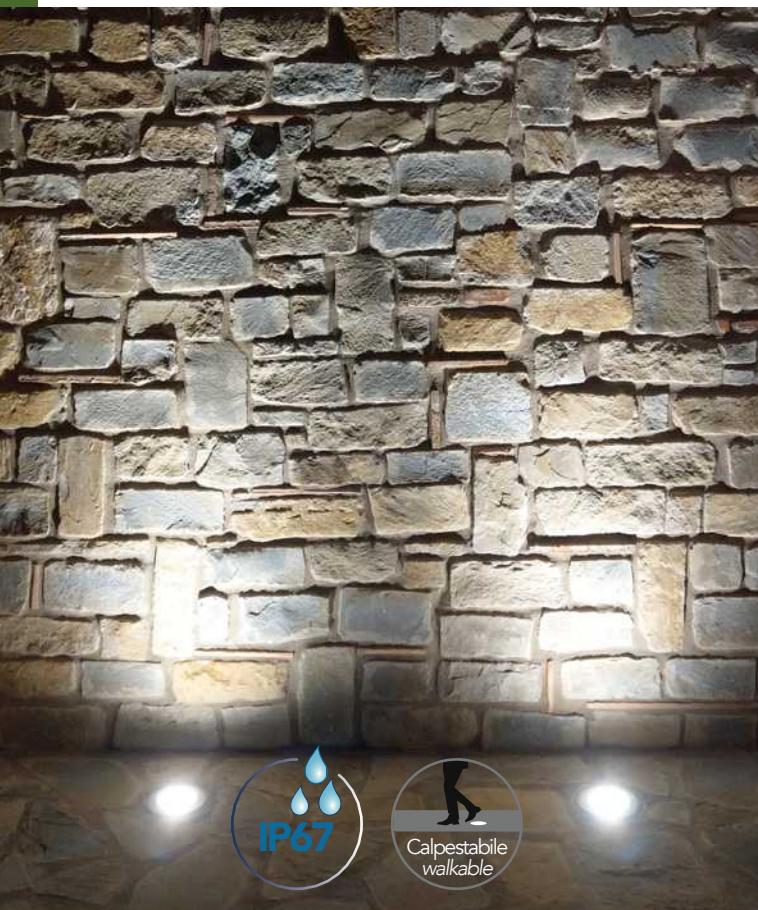

WALK



LED-WALK-Q7 8031440355599	3W 160 LM
LED-WALK-Q11 8031440355575	8W 450 LM
LED-WALK-Q14 8031440355551	12W 750 LM

Potenza Power	3W	8W	12W
Cassafforma recessed box dimensioni in mm - size mm			
Ø 64	95	101	110
Misure - size dimensioni in mm - size mm			
55	71	110	142
67	110	110	142



LED-WALK-R7 8031440355582	3W 160 LM
LED-WALK-R11 8031440355568	8W 450 LM
LED-WALK-R14 8031440355544	12W 750 LM

Potenza Power	3W	8W	12W
Cassafforma recessed box dimensioni in mm - size mm			
Ø 62	88	94	110
Misure - size dimensioni in mm - size mm			
55	68	110	139
67	67	78	78

LED-WALK-Q7


LED-WALK-Q11

LED-WALK-Q14

LED-WALK-R7

LED-WALK-R11


LED-WALK-R14

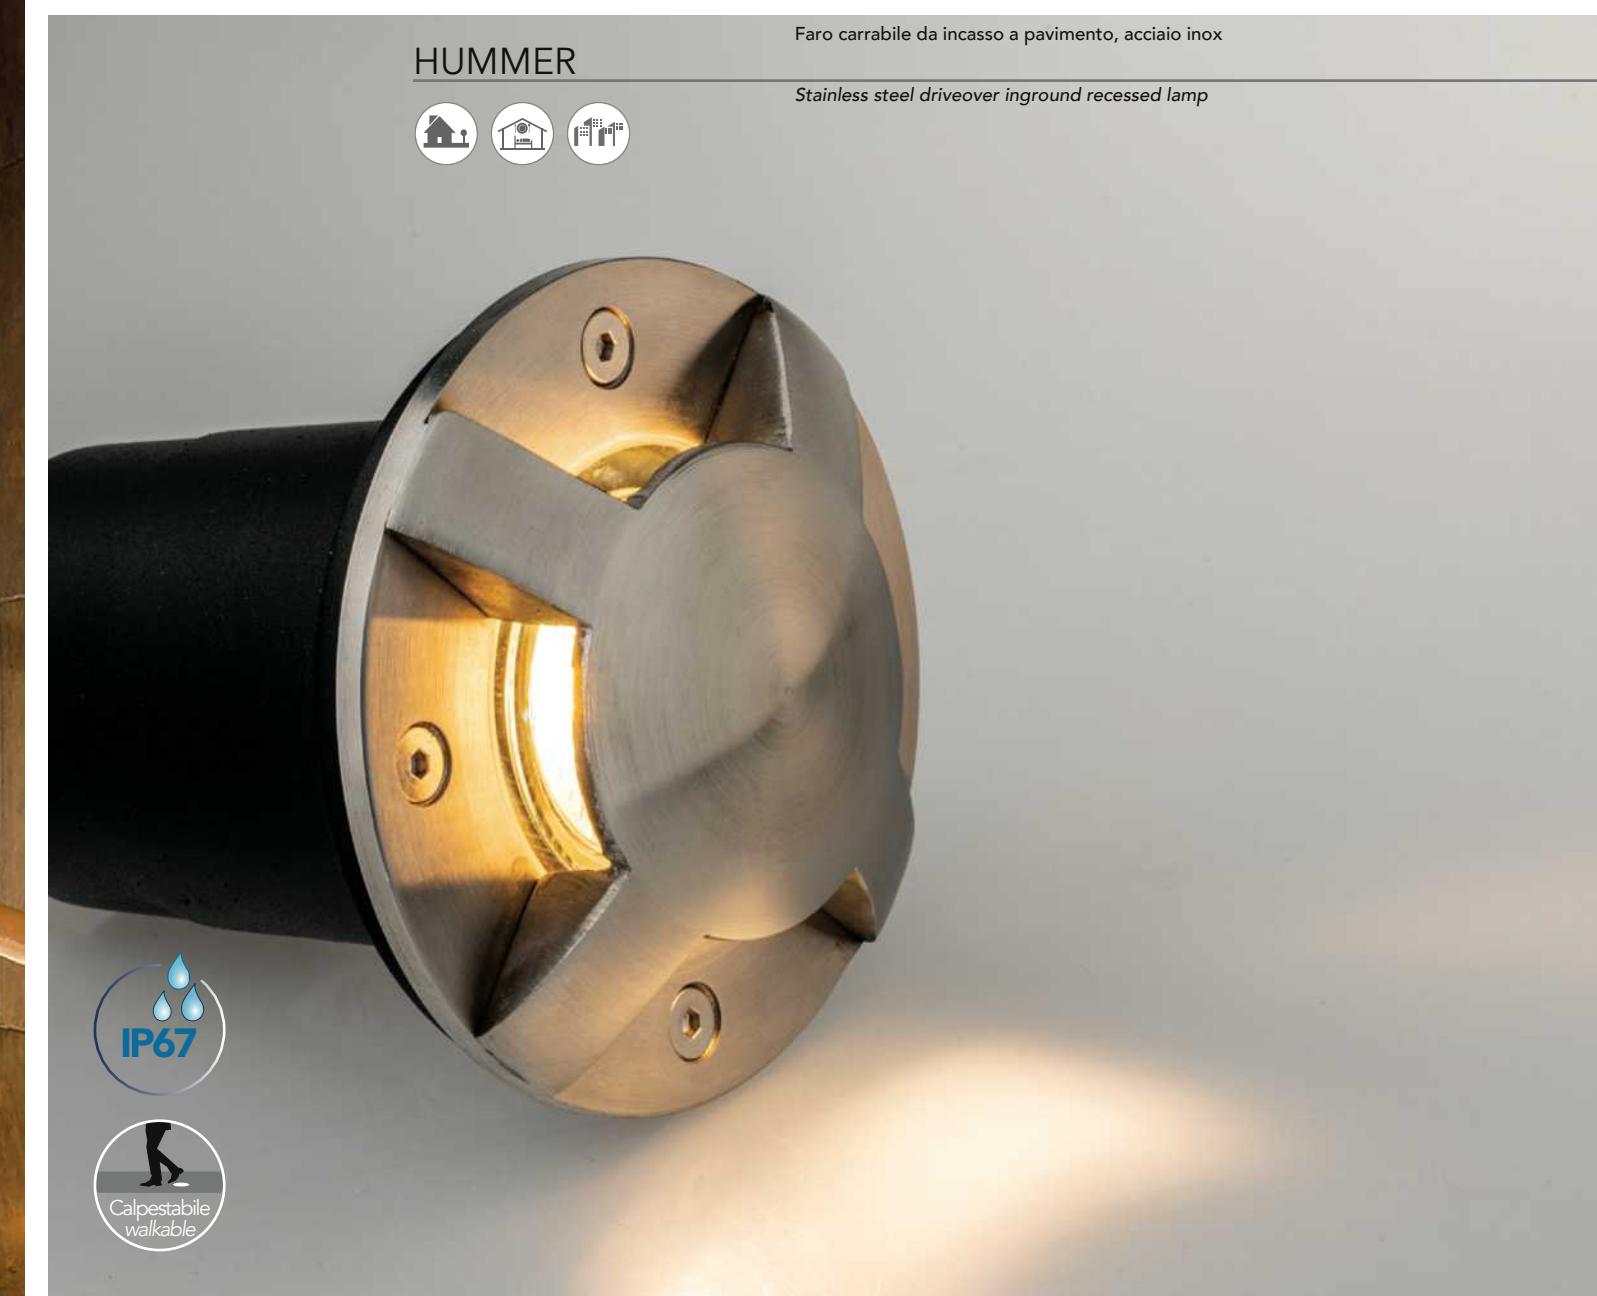


I-HUMMER-R4
8031414877249
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm

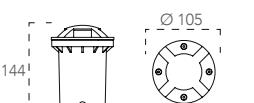

DRIVE



Faro calpestabile da incasso a pavimento acciaio inox


Walkable stainless steel inground lamp



I-DRIVE-R1
8031440313261
GU10
Attacco sorgente
Source

1XGU10 MAX 42W
Lampadina non inclusa
Light bulb not included


118



I-DRIVE-Q1
8031440313254
GU10
Attacco sorgente
Source

1XGU10 MAX 42W
Lampadina non inclusa
Light bulb not included



118



I-DRIVE-M-R1
8031440313247
GU10
Attacco sorgente
Source

1XGU10 MAX 42W
Lampadina non inclusa
Light bulb not included


150



I-DRIVE-E27
8031440313230
E27
Attacco sorgente
Source

1XE27 MAX 60W
Lampadina non inclusa
Light bulb not included

247



LYKAN



Segnapassi in alluminio pressofuso finitura silver goffrato
Die-cast aluminium steplight in embossed silver finish

Materiale

Alluminio

Colore

Silver

Sorgente luminosa

LED SMD 2W - 3W

Driver

Integrato

Temperatura colore

4000K

Flusso luminoso

30 Lm - 110 Lm - 100 Lm

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

120°

CRI

>80

Segnapassi in alluminio pressofuso finitura silver goffrato
Die-cast aluminium steplight in embossed silver finish

Material

Aluminium

Colour

Silver

Light source

LED SMD 2W - 3W

Driver

Built-in

Colour temperature

4000K

Luminous flux

30 Lm - 110 Lm - 100 Lm

Lifetime and on/off

25.000 h - >15.000 on/off


Beam angle

120°

CRI

>80

BOLT

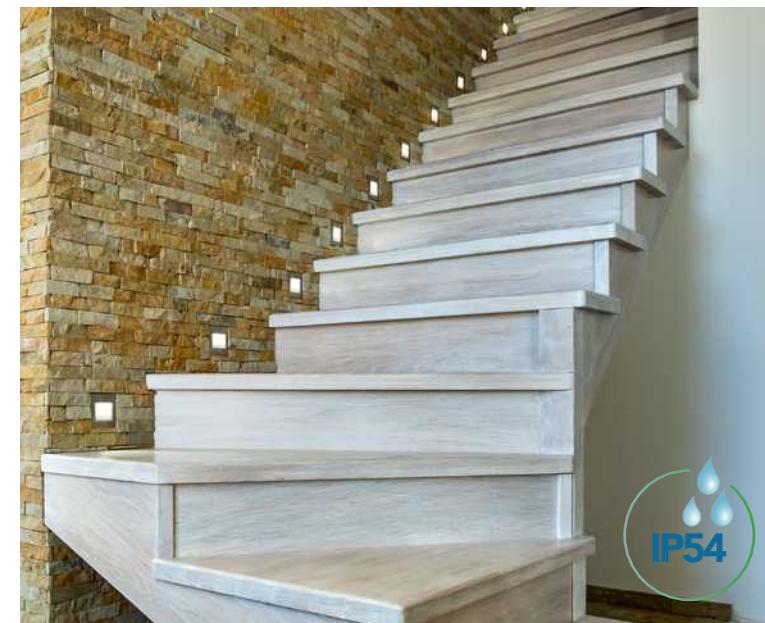

Segnapassi in alluminio pressofuso con ghiera in acciaio
Die-cast aluminium steplight and steel cover

Materiale

Alluminio e acciaio

Colore

Finitura nickel

Sorgente luminosa

LED SMD 3W - 6W

Driver

integrato

Colour temperature

4000K

Luminous flux

240 Lm - 480 Lm - 190 Lm

Lifetime and on/off

25.000 h >15.000 on/off

Angolo di luce

120°

CRI

>80

Segnapassi in alluminio pressofuso con ghiera in acciaio
Die-cast aluminium steplight and steel cover

Material

Aluminium and steel

Colour

Nickel finish

Light source

LED SMD 3W - 6W

Driver

Built-in

Colour temperature

4000K

Luminous flux

240 Lm - 480 Lm - 190 Lm

Lifetime and on/off

25.000 h >15.000 on/off

Beam angle

120°

CRI

>80



INC-LYKAN-Q90
8031440361033

2W 30 LM

INC-LYKAN-Q140
8031440361040

3W 110 LM

INC-LYKAN-Q90

INC-LYKAN-Q140

Cassaforma
recessed box
dimensioni in mm - size mm

78X75
58

126X111
58

Misure - size
dimensioni in mm - size mm

80 90 90

80 140 140



INC-LYKAN-RT
8031440361057

3W 100 LM

INC-LYKAN-RT

INC-LYKAN-RT

Cassaforma
recessed box
dimensioni in mm - size mm

126X56
58

Misure - size
dimensioni in mm - size mm

80 140 70



INC-BOLT-GRILL
8031440363532

6W 190 LM

Cassaforma
recessed box
dimensioni in mm - size mm

158X56
80

Misure - size
dimensioni in mm - size mm

75 120 68



INC-BOLT-Q71
8031440363556

3W 240 LM

INC-BOLT-RT170
8031440363525


6W 480 LM

Cassaforma
recessed box
dimensioni in mm - size mm

66X66
80

Misure - size
dimensioni in mm - size mm

55 71 71

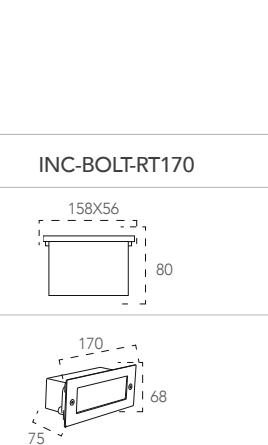

SLAB



Incasso segnapassi alloggio in cassetta di derivazione 503, con diffusore in vetro temperato bianco

Materiale

Struttura in alluminio e diffusore in vetro temperato

Sorgente luminosa

LED SMD 3W - 5W

Driver

integrato

Temperatura colore

4000K

Flusso luminoso

100 Lm - 170 Lm

Durata e on/off

25.000 h >10.000 on/off

Angolo di luce

120°

CRI

>80

Down light for recess box 503 with white tempered glass diffuser

Material

Structure in aluminium and tempered glass

Light source

LED SMD 3W - 5W

Driver

Built-in

Colour temperature

4000K

Luminous flux

100 Lm - 170 Lm

Lifetime and on/off

25.000 h >10.000 on/off

Beam angle

120°

CRI

>80



BREEN



Incasso segnapassi alloggio in cassetta di derivazione 503, nei colori bianco o antracite goffrato



Down light for recess box 503 embossed white or antracite colour



Sorgente luminosa
Light source






INC-SLAB-503
8031414864683 3W 100 Lm

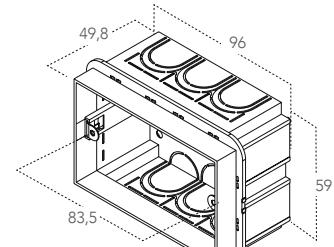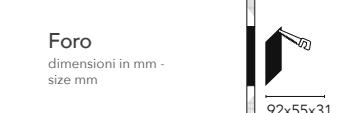


Scatola derivazione 503 non inclusa
503 junction box not included



INC-SLAB-506
8031414877232 5W 170 Lm

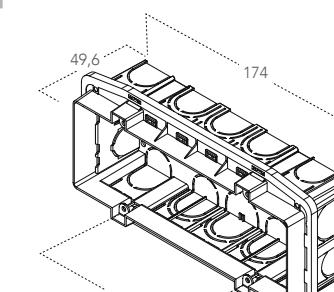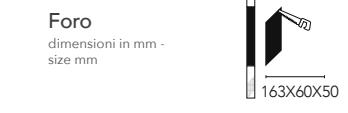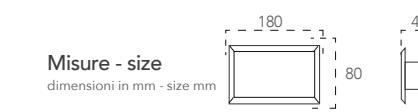

Scatola derivazione 506L non inclusa
506L junction box not included

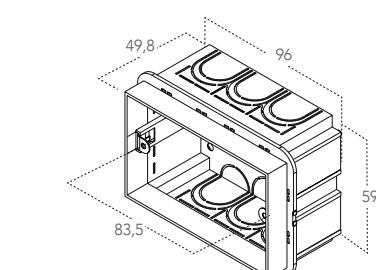

Scatola derivazione 503 non inclusa
503 junction box not included

Materiale

Polycarbonate

Colore

Bianco goffrato - antracite goffrato

Sorgente luminosa

LED SMD 3W

Driver

integrato

Temperatura colore

4000K

Flusso luminoso

150 Lm

Durata e on/off

25.000 h >10.000 on/off

Angolo di luce

45°

CRI

>80

Materiale

Polycarbonate

Colore

Embossed white - embossed antracite

Light source

LED SMD 3W

Driver

Built-in

Colour temperature

4000K

Luminous flux

150 Lm

Lifetime and on/off

25.000 h >10.000 on/off

Beam angle

45°

CRI

>80

INC-BREEN-503 BCO
8031414864690 3W - 150 Lm


INC-BREEN-503 ANT
8031414866809 3W - 150 Lm

Misure - size

dimensioni in mm - size mm

Foro - cut out

dimensioni in mm - size mm



BOLT



Incasso segnapassi alloggio in cassetta di derivazione 503 funzione con sensore di movimento e crepuscolare con doppia placchetta in acciaio intercambiabile nei colori nickel o bianco

Down light for recess box 503 and double sensor function motion and crepuscular with double interchangeable steel frame in nickel or white colours



Sorgente luminosa
Light source

LED SMD

IP65

BOLT



Incasso segnapassi alloggio in cassetta di derivazione 503 o 506L con doppia placchetta in acciaio intercambiabile nei colori nickel o bianco

Down light for recess box 503 or 506L with double interchangeable steel frame in nickel or white colours

Materiale

PC e placchette in acciaio

Colore

Finitura nickel o bianco

Sorgente luminosa

LED SMD 3W - 5W

Driver

integrato

Temperatura colore

4000K

Flusso luminoso

200 Lm - 330 Lm

Durata e on/off

25.000 h >10.000 on/off

Angolo di luce

120°

CRI

>80

Down light for recess box 503 or 506L with double interchangeable steel frame in nickel or white colours

Material

PC and steel frames

Colour

Nickel or white finish

Light source

LED SMD 3W - 5W

Driver

Built-in

Colour temperature

4000K

Luminous flux

200 Lm - 330 Lm

Lifetime and on/off

25.000 h >10.000 on/off

Beam angle


120°

CRI

>80



sensore di movimento sensore crepuscolare

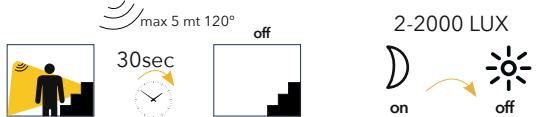

max 5 mt 120°




off

on

off

INC-BOLT-503S
8031414866281 3W 200 Lm

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included




Scatola derivazione 503 non inclusa
503 junction box not included



INC-BOLT-506
8031414867967 5W 330 Lm

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included



Scatola derivazione 506L non inclusa
506L junction box not included

SHELBY

Applique segnapassi a LED in alluminio antracite

Aluminium LED walk light anthracite finish

Sorgente luminosa
Light source

SHELBY

Materiale

Alluminio

Colore

Antracite goffrato

Driver

integrale

Sorgente luminosa

LED SMD 4W - 6W

Temperatura colore

4000K

Durata e on/off

20.000h - >10.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK07

Material

Aluminium

Colour

Embossed antracite

Driver

Built-in

Light source

LED SMD 4W - 6W

Color temperature

4000K

Lifetime and on/off

20.000h - >10.000 on/off

Beam angle

120°

CRI


>80

IK degree


IK07

LED-W-SHELBY-130
8031440361002

4W - 120 LM

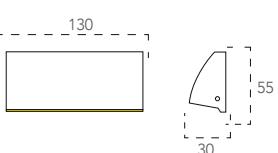Misure - size
dimensioni in mm - size mmLED-W-SHELBY-170
8031440361019

6W - 240 LM

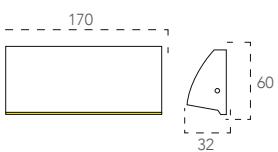Misure - size
dimensioni in mm - size mm

COSMO

Proiettore a batteria in termoplastica nero con sensore di movimento

Flood light with battery power in black thermoplastic with motion sensor

Sorgente luminosa
Light source**Materiale**

Termoplastica

Material

Thermoplastic

Sorgente luminosa

LED SMD 1W

Light source

LED SMD 1W

Batteria

3x1,2V AAA non incluse

Battery

3x1,2V AAA not included

Temperatura colore

6500K

Color temperature

6500K

Flusso luminoso

80 Lm

Luminous flux

80 Lm

Angolo di luce


120°

Beam angle

120°

LED-COSMO/S
8031439841263

1W

sensore di movimento regolabile
adjustable motion sensorMisure - size
dimensioni in mm - size mm

COSMO

Proiettore in termoplastica nero con pannello solare e sensore di movimento

Black thermoplastic flood light with solar panel and motion sensor

Sorgente luminosa
Light source**Materiale**

Termoplastica

Material

Thermoplastic

Sorgente luminosa

LED SMD 1W

Light source

LED SMD 1W

Batteria

3,6V incluse

Battery

3,6V included

Temperatura colore

6500K

Colour temperature

6500K

Flusso

80Lm

Luminous flux

80Lm

Angolo di luce




120°

Beam angle

120°

LED-COSMO/S-FV
8031439821265

1W

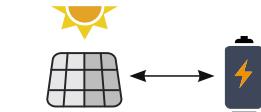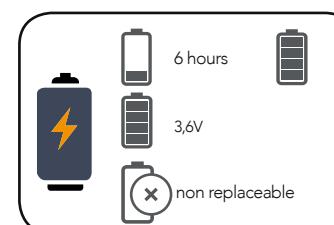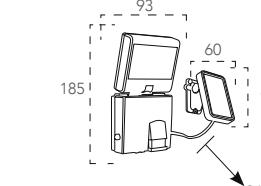sensore di movimento regolabile
adjustable motion sensorPannello solare
Solar panelMisure - size
dimensioni in mm - size mm

ELIOS

Proiettore in alluminio silver con pannello solare e sensore di movimento

Silver aluminium flood light with solar panel and motion sensor



Sorgente luminosa
Light source



Materiale
Alluminio

Colore
Silver

Sorgente luminosa
LED SMD 9W

Batteria
lithium 7,4V 1800 mAh inclusa

Temperatura colore
5000K

Flusso luminoso
620 Lm

Angolo di luce
120°

Material
Aluminium

Colour
Silver

Light source
LED SMD 9W

Battery
lithium 7,4V 1800 mAh included

Colour temperature
5000K

Luminous flux
620 Lm

Beam angle
120°

LED-ELIOS-SOLAR
8031440355124

9W

sensore di movimento regolabile
adjustable motion sensor



2-2000 LUX

12 mt 120°
off

on
off

Pannello solare
Solar panel

Misure - size
dimensioni in mm - size mm

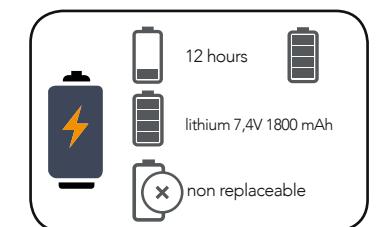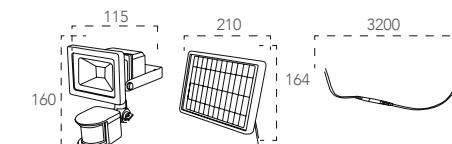

EOS

Proiettore in termoplastica silver con pannello solare, sensore di movimento e crepuscolare.


Silver thermoplastic flood light with solar panel, motion and crepuscular sensor




Sensore di movimento 100% Luce, Sensore crepuscolare 20% Luce
Motion sensor 100% light. Crepuscular sensor 20% Light



Sensore di movimento 100% luce no sensore crepuscolare
Motion sensor 100% light. No crepuscular sensor

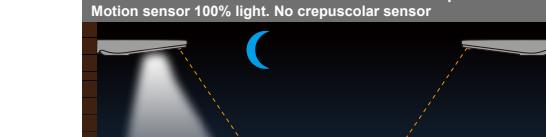

Sensore crepuscolare 20% luce no sensore movimento
Crepuscular sensor 20% light. No motion sensor

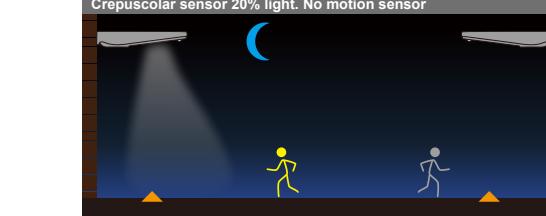

1

2

3



Materiale
Termoplastica

Colore
Silver

Sorgente luminosa
LED SMD 4W

Batteria
lithium 3,9V 4400mAh inclusa

Colour temperature
4000K

Flusso luminoso
450 Lm

Angolo di luce
100°

LED-EOS-SOLAR
8031414862740

Material
Thermoplastic

Colour
Silver

Light source
LED SMD 4W

Battery
lithium 3,9V 4400mAh included

Colour temperature
4000K


Luminous flux
450 Lm

Beam angle
100°

4W

sensore di movimento regolabile distanza Max 6m 120°
adjustable motion sensor max distance 6m 120°

Misure - size
dimensioni in mm - size mm



OPEN

Sorgente luminosa
Light sourceApplique LED in termoplastica bianco con sensore e pannello solare
Thermoplastic LED wall light white finish with sensor and solar panel

Materiale

Termoplastica

Material

Thermoplastic

Sorgente luminosa

20xLED SMD 3W 2835

Light source

20xLED SMD 3W 2835

Batteria

inclusa Li-ion 1200 mAh

Battery

included Li-ion 1200 mAh

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

300Lm

Luminous flux

300Lm

Angolo di luce




120°

Beam angle


120°

LED-OPEN-AP
8031414870752

3W - 300 Lm

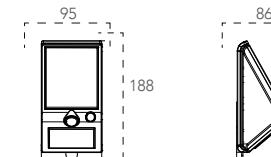Pannello solare
Solar panelMisure - size
dimensioni in mm - size mm

ON/OFF

Base easy-up che permette il duplice utilizzo del faro come
lampada da muro e lampada portatile
Easy-up base for double use of the lamp, as wall and portable
lamp

SKYP

Sorgente luminosa
Light sourceApplique LED in termoplastica bianco con sensore e pannello solare
Thermoplastic LED wall light white finish with sensor and solar panel

Materiale

Termoplastica

Material

Thermoplastic

Sorgente luminosa

23xLED SMD 3W 2835

Light source

23xLED SMD 3W 2835

Batteria

inclusa Li-ion 3,7V 1200 mAh

Battery

included Li-ion 3,7V 1200 mAh

Temperatura colore

4000K

Color temperature

4000K

Flusso luminoso

130Lm

Luminous flux

130Lm

Angolo di luce



120°

Beam angle


120°

LED-SKYP-AP
8031414870783

3W - 130 Lm

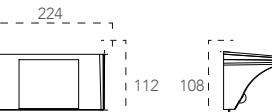Misure - size
dimensioni in mm - size mm

ON/OFF

Base easy-up che permette il duplice utilizzo del faro come
lampada da muro e lampada portatile
Easy-up base for double use of the lamp, as wall and portable
lamp

ARGO

Proiettore in alluminio antracite con diffusore in acrilico con pannello solare , sensore di movimento e crepuscolare
Anthracite aluminium flood light with acrylic diffuser, solar panel , motion and crepuscular sensor



Sorgente luminosa
Light source



Materiale
Alluminio e acrilico

Colore
Antracite

Sorgente luminosa
LED SMD 1,8W

Batteria
lithium 3,7V 2200 mAh inclusa

Temperatura colore
4000K

Flusso luminoso
130 Lm

Angolo di luce
120°

Material
Aluminium and acrylic

Colour
Anthracite

Light source
LED SMD 1,8W

Battery
lithium 3,7V 2200 mAh included

Colour temperature
4000K

Luminous flux
130 Lm

Beam angle
120°

LED-ARGO-SOLAR
8031414865345

1,8W - 130 Lm


sensore di movimento
motion sensor

on 130Lm 1,5 hours
5 m 100°
30s
off


sensore crepuscolare
crepuscular sensor

off
on 26Lm 8 hours
5 m 110°

Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm

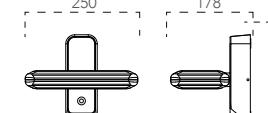

PRODIGY

Proiettore in termoplastica antracite con pannello solare e sensore di movimento

Anthracite thermoplastic flood light with solar panel and motion sensor



Sorgente luminosa
Light source



Materiale
Termoplastica

Colore
Antracite

Sorgente luminosa
LED SMD 8,4W

Batteria
lithium 3,7V 4000 mAh inclusa



Colour temperature
4000K

Luminous flux
600 Lm



Beam angle
120°

LED-PRODIGY-SOLAR
8031414870745

8,4W - 600 Lm

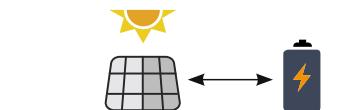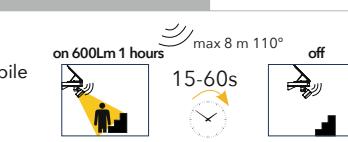

Misure - size
dimensioni in mm - size mm

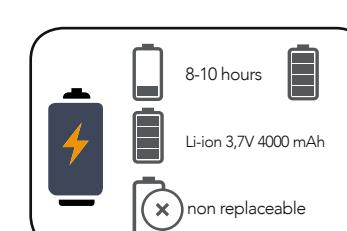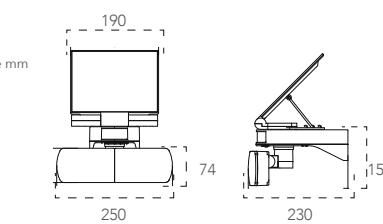

SHIVA

Sorgente luminosa
Light source

SOLAR

Proiettore in termoplastica antracite con pannello solare e sensore di movimento

Anthracite thermoplastic flood light with solar panel and motion sensor

**Materiale**
Termoplastica**Colore**

Antracite

Sorgente luminosa

LED COB 2x1,5W

Batteriainclusa Li-ion 3,7V 1200 mAh
Non inclusa x3 1,2V AAA**Temperatura colore**

4000K

Punti luce


2

Flusso luminoso

230 Lm

Angolo di luce

120°

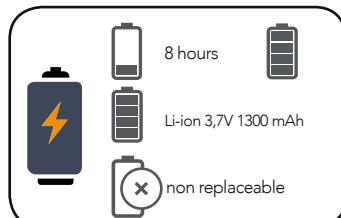

Doppia funzione : auto-ricarica con pannello solare o alimentazione con pile AAA (non incluse)
Double function: auto recharge by solar panel or power by AAA battery (not included)

Material
Thermoplastic**Colour**

Anthracite

Light source

LED COB 2x1,5W

Batteryincluded Li-ion 3,7V 1200 mAh
Not included x3 1,2V AAA**Colour temperature**

4000K

Number of light sources

2

Luminous flux




230 Lm

Beam angle

120°

LED-SHIVA-SOLAR
8031414870769

2X1,5W - 230 Lm

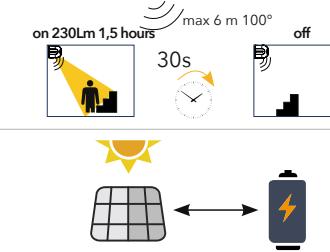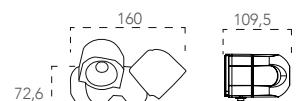Pannello solare
Solar panelAccessori inclusi
Accessories includedCavo 1,9 metri
1,9 meters cableMisure - size
dimensioni in mm - size mm

Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile
Easy-up base for double use of the lamp, as wall and portable lamp

GEA

Proiettore in alluminio nero con pannello solare

Black aluminium flood light with solar panel

**Materiale**
Alluminio**Colore**

Nero

Sorgente luminosa

LED SMD 27W

Batteria

Lithium 6,4V 10000 mAh

Colour temperature

6000K

Flusso luminoso




1600 Lm


Angolo di luce

120°

LED-GEA-120-SOLAR
8031414865314

27W

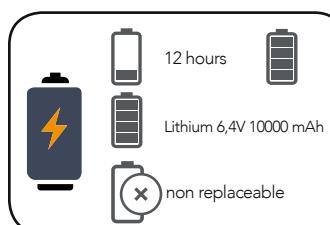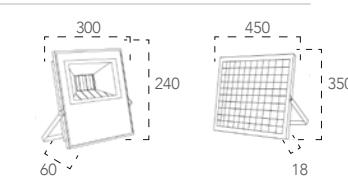Accessori inclusi
Accessories includedTelecomando
Remote controlMisure - size
dimensioni in mm - size mm


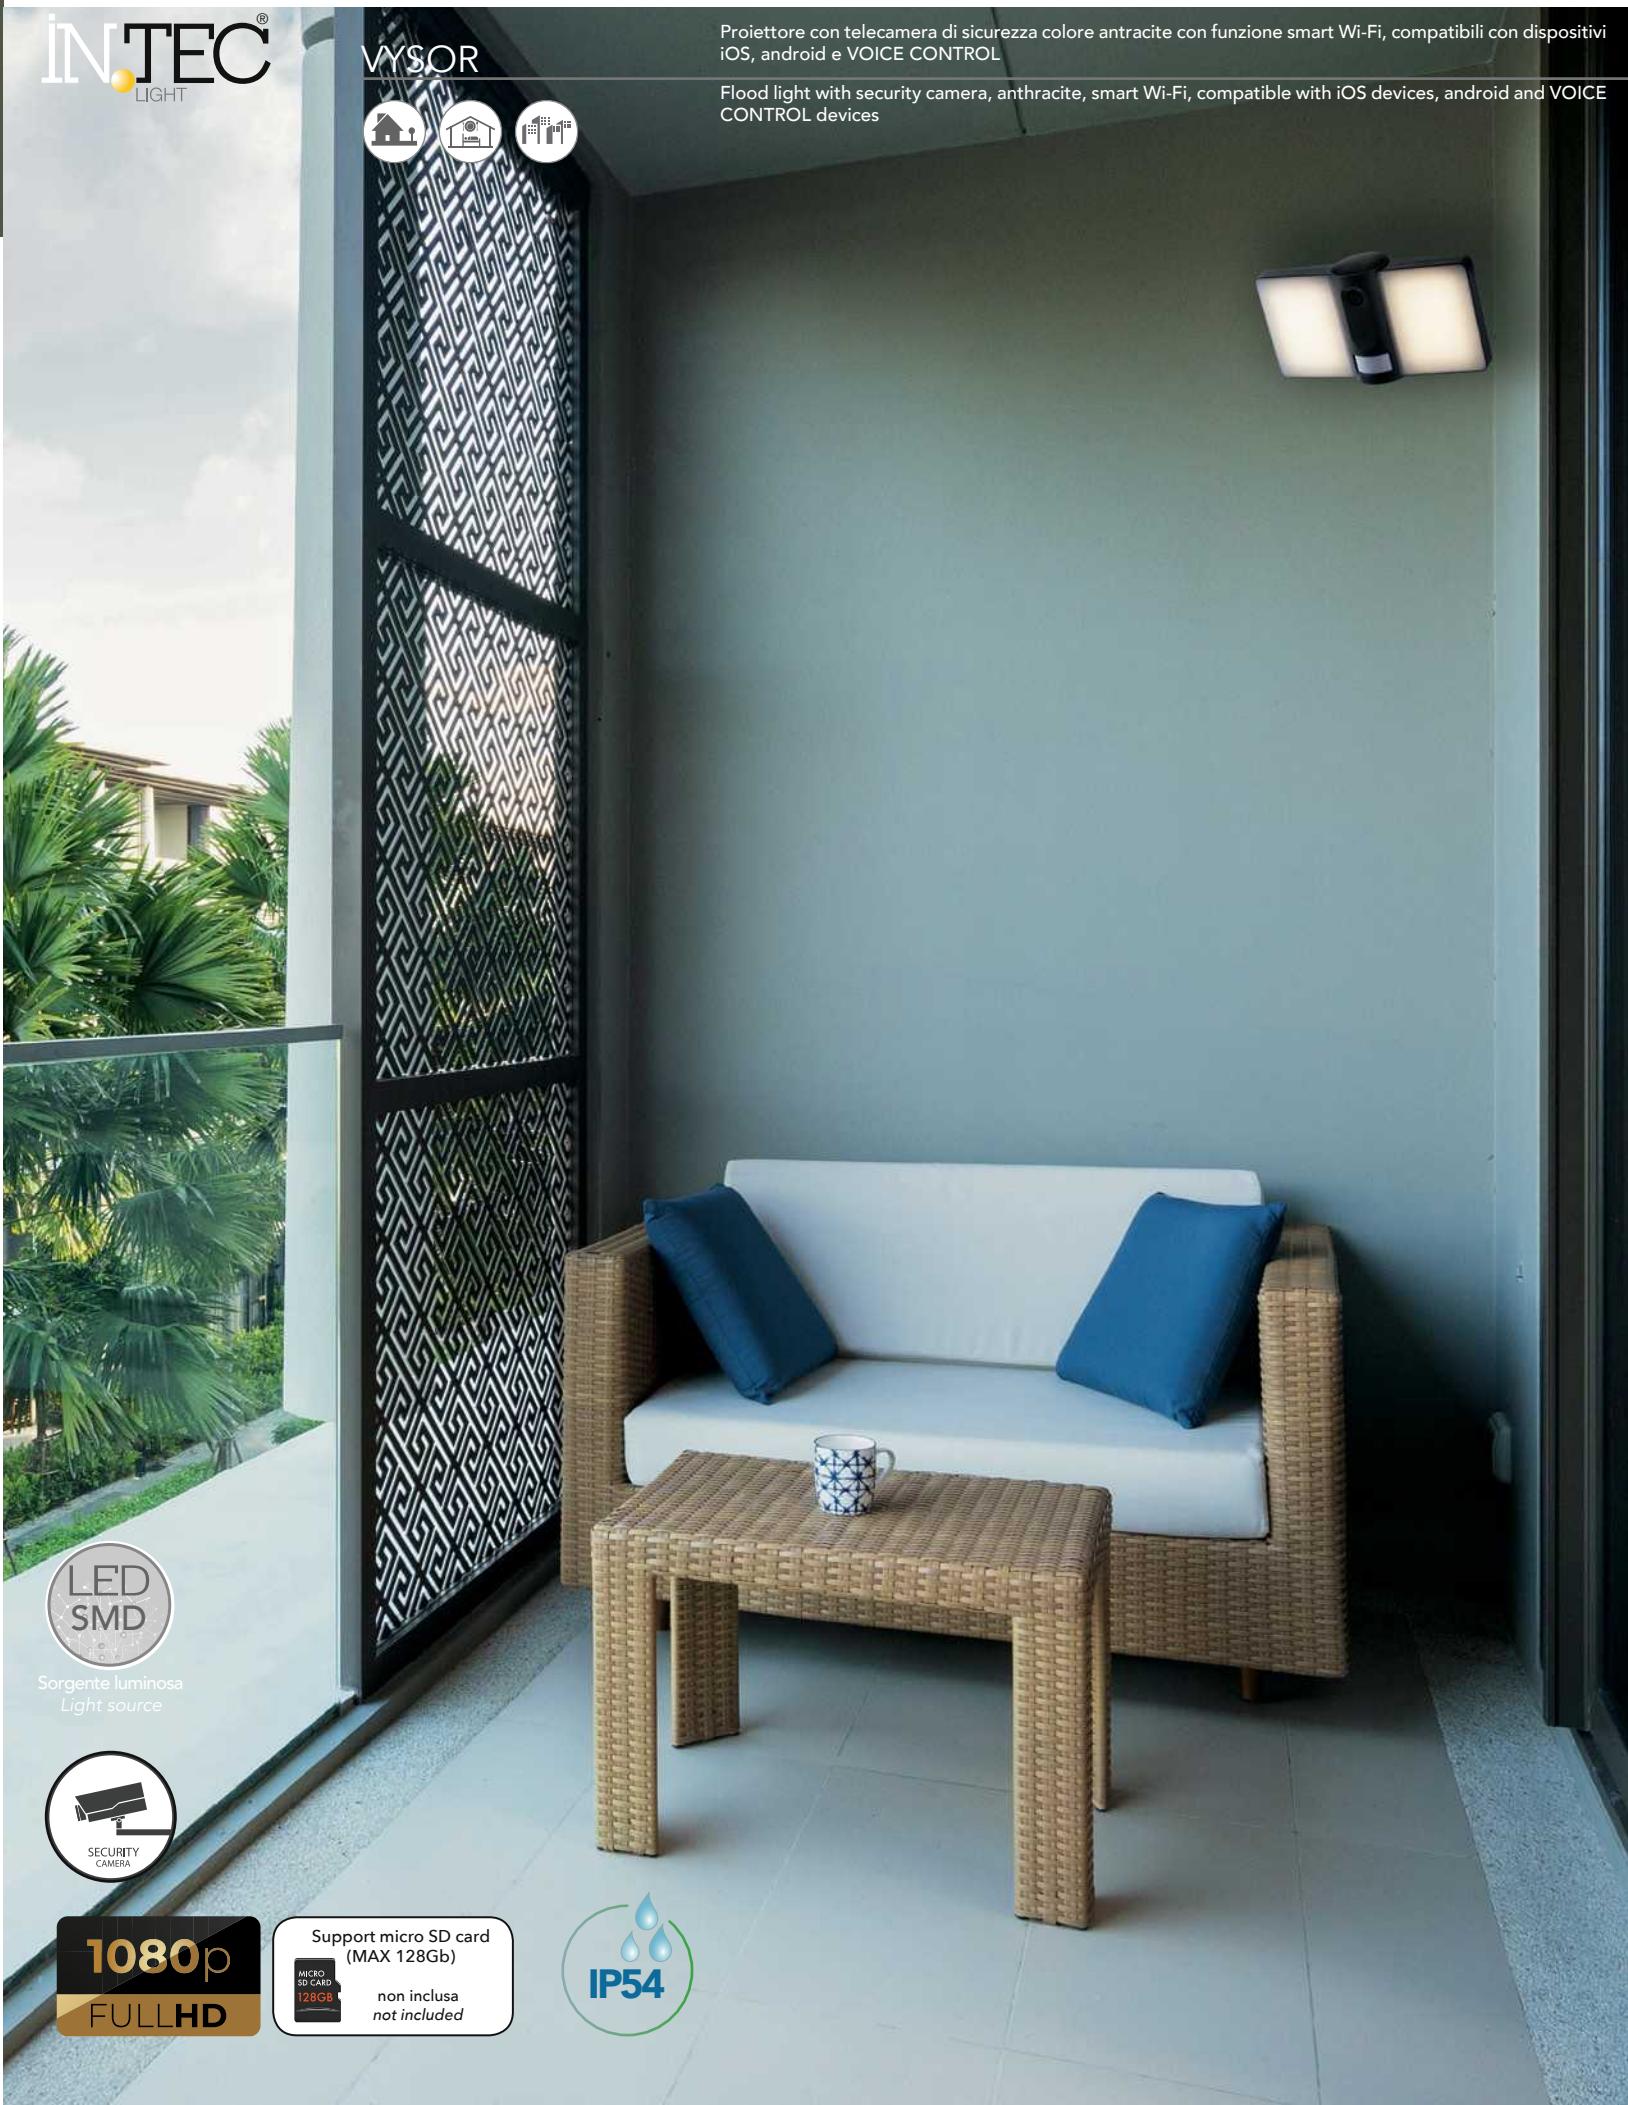


Materiale	Alluminio+PC	Material	Aluminium+PC
Colore	antracite	Colour	anthracite
Driver	integrato	Driver	Built-in
Sorgente luminosa	LED SMD 20W	Light source	LED SMD 20W
Temperatura colore	4000K	Color temperature	4000K
Flusso luminoso	1400 Lm	Luminous flux	1400 Lm
Durata e on/off	25.000 h - >10.000 on/off	Lifetime and on/off	25.000 h - >10.000 on/off
Angolo di luce	120°	Beam angle	120°
CRI	>85	CRI	>85
Grado IK	IK08	IK degree	IK08



LED-VYSOR-SECURITY
8031414871810 **20W**

Misure - size
dimensioni in mm - size mm

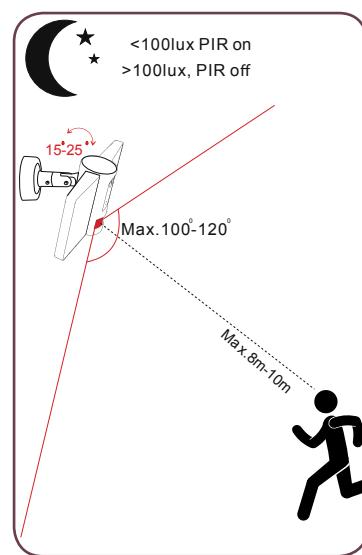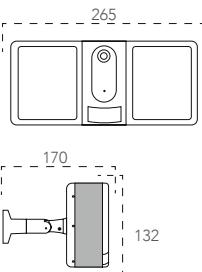

Tipo di sensore video - Video sensor type	1/2,9" CMOS
Pixel	2.0 Mega
Illuminazione minima - Min illuminance	Color 0.10lux @F2.0, black and white 0.01lux @F2.0
Angolo vista camera - Camera view angle	135°
Otturatore - Shutter	1/25-1/100,000 per second
Infrarossi - IR	High power LED with ICR
WDR	Digital WDR
Video compression standard	H.264
Video compression standard	32Kbps - 2Mbps
Risoluzione video - Max picture size	1920x1080
Frequenza fotogrammi - Frame rate	1-20 per second
Audio	Full duplex audio (doppio sistema di comunicazione)
Memoria - Storage	Support SD card (MAX 128Gb) Cloud storage NVR
Impostazione immagine - Image setting	Support HD/SD; support mirror
Reset	Support
Controllo della luce - Lighting control	Support manual, sensor, plan switch light (gestione accensioni)
Interfaccia di protocollo - Interface protocol	Private
Comunicazione di protocollo - Communication protocol	TCP/IP, HTTP, DHCP, DNS, RTSP
Funzioni generali - General function	Dual stream, password protection
Wi-Fi	IEEE802.11b/g/n
PIR	Support PIR and motion detection

SAT



Proiettore in termoplastica LED integrato finitura antracite con diffusore in acrilico con sensore di movimento e crepuscolare
Built-in LED thermoplastic flood lamp anthracite finish with acrylic diffuser with night and motion sensor



Sorgente luminosa
Light source

Materiale

Termoplastica

Colore

antracite

Sorgente luminosa

LED SMD 10W - 20W

Driver

incluso

Temperatura colore

4000K

Flusso luminoso

800 Lm - 1600 LM

Durata e on/off

25.000 h - >15.000 on/off

Angolo di luce

120°

CRI

>80

Material

Thermoplastic

Colour

anthracite

Light source

LED SMD 10W - 20W

Driver

included

Colour temperature

4000K

Luminous flux

800 Lm - 1600 LM

Lifetime and on/off


25.000 h - >15.000 on/off

Beam angle

120°

CRI

>80

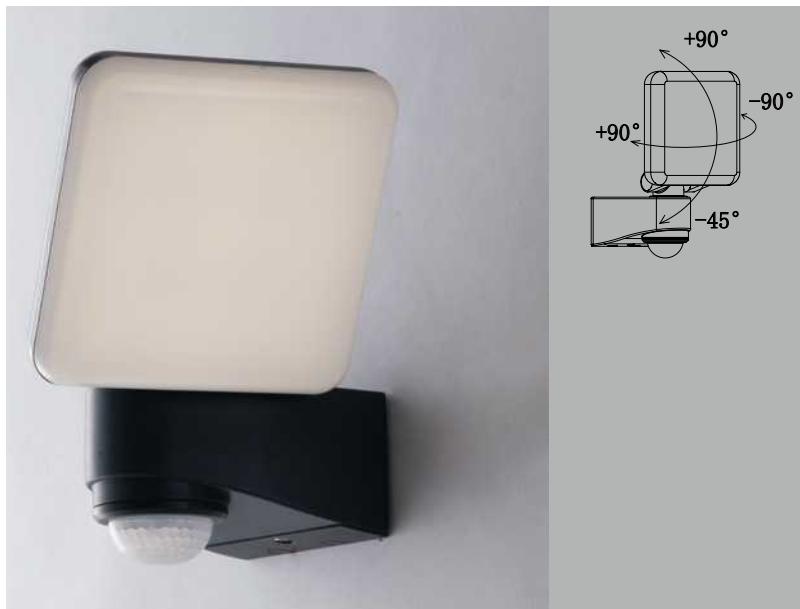

LED-SAT-10
8031414868261



10W - 800 Lm

Accessori inclusi
Accessories included

sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm

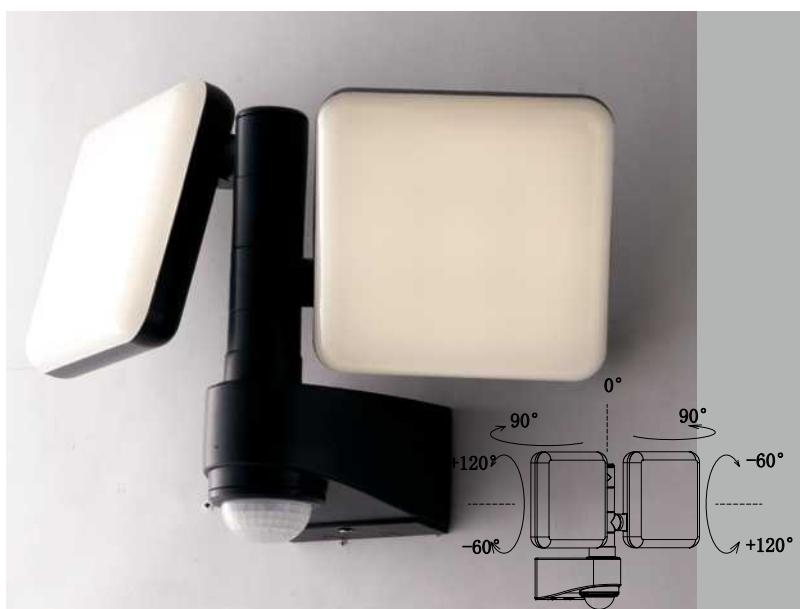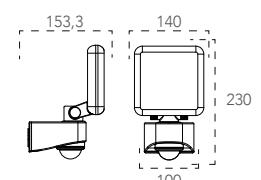


LED-SAT-20
8031414868278


2X10W - 1600 Lm

Accessori inclusi
Accessories included

sensore di movimento regolabile
adjustable motion sensor

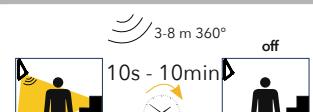

Misure - size
dimensioni in mm - size mm

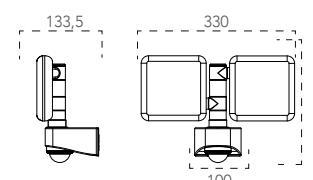



Sorgente luminosa
Light source



Luce
Light

KRONOS

Proiettore in alluminio LED integrato finitura bianco goffrato

Built-in LED aluminium flood lamp embossed white finish



Materiale

Alluminio diffusore acrilico

Colore

Bianco goffrato

Sorgente luminosa

LED SMD 10W - 20W - 50W - 100W

Flusso luminoso

800 Lm - 1600 Lm - 4000 Lm - 8000 Lm

Driver

integrato

Temperatura colore

4000K

Durata e on/off

25.000 h >15.000 on/off
(100w) 15.000 h >7.500 on/off

Angolo di luce

120°

CRI

>80

Material

Aluminium acrylic diffuser

Colour

Embossed white

Light source

LED SMD 10W - 20W - 50W - 100W

Luminous flux

800 Lm - 1600 Lm - 4000 Lm - 8000 Lm

Driver

Built-in

Colour temperature

4000K

Lifetime and on/off

25.000 h >15.000 on/off
(100w) 15.000 h >7.500 on/off

Beam angle


120°

CRI

>80



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT




LED-KRONOS/10W

LED-KRONOS/10W
8031436031230

10W - 800 LM



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT




LED-KRONOS/20W

LED-KRONOS/20W
8031436001233

20W - 1600 LM



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT




LED-KRONOS/50W

LED-KRONOS/50W
8031436011232

50W - 4000 LM PF 0,90




FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT



LED-KRONOS/100W

LED-KRONOS/100W
8031414018932

100W - 8000 LM PF 0,90

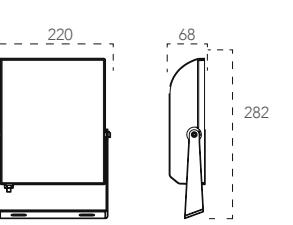

Misure - size
dimensioni in mm - size mm



Sorgente luminosa
Light source



Luce
Light

Proiettore in alluminio LED integrato finitura silver
Built-in LED aluminium flood lamp embossed silver finish



Materiale

Alluminio diffusore acrilico

Colore

Silver goffrato

Sorgente luminosa

LED SMD 10W - 20W - 30W - 50W - 100W

Flusso luminoso

800 Lm - 1600 Lm - 2400 Lm
4000 Lm - 8000 Lm

Driver

integrato

Temperatura colore

4000K

Durata e on/off

25.000 h >15.000 on/off
(100w) 15.000 h >7.500 on/off

Angolo di luce

120°

CRI

>80

Material

Aluminium acrylic diffuser

Colour

Embossed silver

Light source

LED SMD 10W - 20W - 30W - 50W - 100W

Luminous flux

800 Lm - 1600 Lm - 2400 Lm
4000 Lm - 8000 Lm

Driver

Built-in

Colour temperature

4000K

Lifetime and on/off

25.000 h >15.000 on/off
(100w) 15.000 h >7.500 on/off


Beam angle

120°

CRI

>80

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

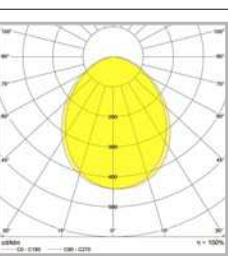


LED-ELIOS/10W


LED-ELIOS/10W
8031431291189

10W - 800 LM

Misure - size
dimensioni in mm - size mm

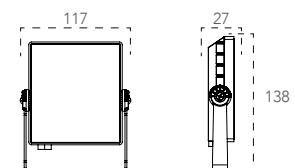

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

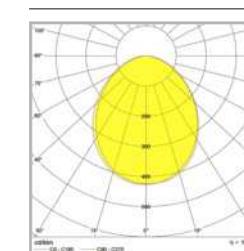

LED-ELIOS/20W

LED-ELIOS/20W
8031431281180


20W - 1600 LM

LED-ELIOS/30W
8031437391241

30W - 2400 LM PF 0,90



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

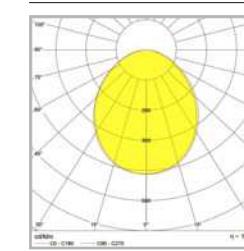


LED-ELIOS/30W

LED-ELIOS/50W
8031432091191

50W - 4000 LM PF 0,90



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT




LED-ELIOS/50W

LED-ELIOS/100W
8031440357159

100W - 8000 LM PF 0,90



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

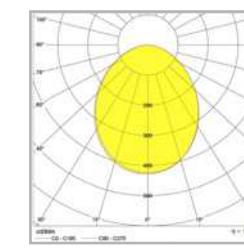


LED-ELIOS/100W

LED-ELIOS/100W
8031440357159

100W - 8000 LM PF 0,90

Misure - size
dimensioni in mm - size mm

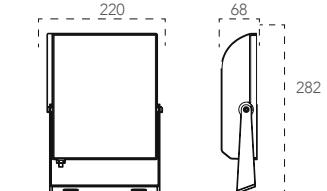

ELIOS



Proiettore

Flood lamp



Materiale

Alluminio

Material

Aluminium

Colore

Antracite

Colour

Anthracite

Sorgente luminosa

LED SMD 10W - 30W

Light source

LED SMD 10W - 30W

Flusso luminoso

800 Lm - 2400 Lm

Luminous flux

800 Lm - 2400 Lm

Driver

Integrato

Driver

Built-in

Temperatura colore

4000K

Colour temperature

4000K

Durata e on/off

25.000 h >10.000 on/off

Lifetime and on/off

25.000 h >10.000 on/off

Angolo di luce

120°

Beam angle

120°


CRI

>80

CRI

>80

CLASSE
A CE EMC

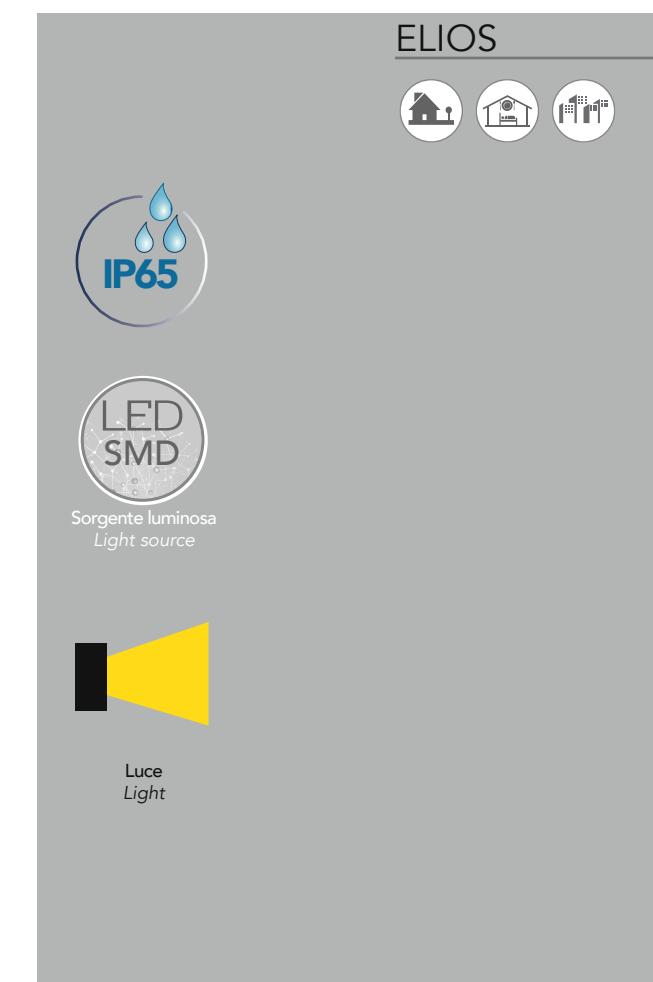

ELIOS



Proiettore LED portatile

LED portable flood light



LED-ELIOS-S/10W
8031437381242

10W - 800 LM

Accessori inclusi
Accessories included

sensore di movimento regolabile
adjustable motion sensor


3-2000 LUX

off → on




Misure - size

dimensioni in mm - size mm

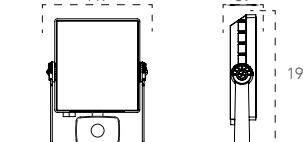

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

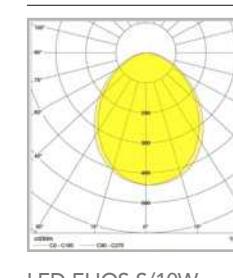

LED-ELIOS-S/10W



LED-ELIOS-S/30W
8031436391235

30W - 2400 LM

Accessori inclusi
Accessories included

sensore di movimento regolabile
adjustable motion sensor


3-2000 LUX

off → on




Misure - size

dimensioni in mm - size mm

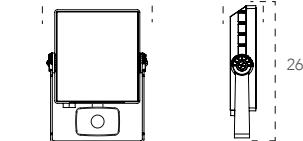


FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

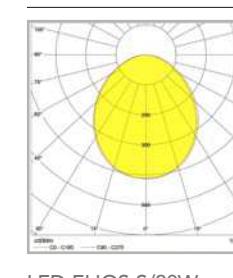


LED-ELIOS-S/30W

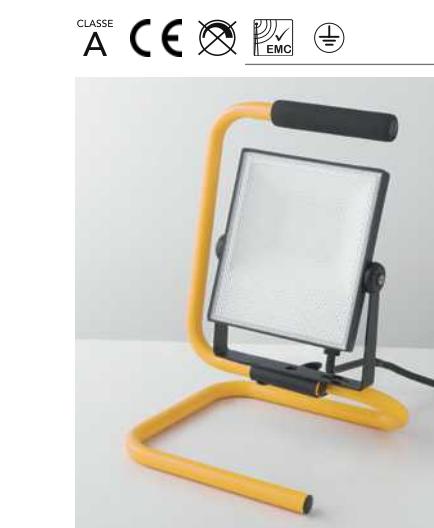

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

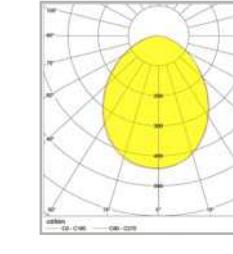

LED-ELIOS-P/20W


LED-ELIOS-P/20W
8031436381236

20W - 1600 LM

Accessori inclusi
Accessories included




Cavo 1,6 metri c/spina

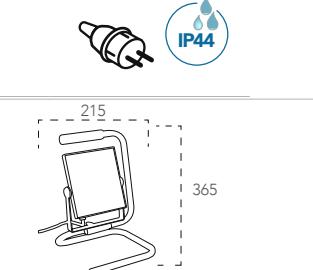

Misure - size

dimensioni in mm - size mm

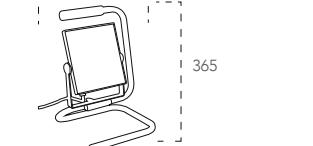

PLUTONE



Proiettore a led integrato in alluminio antracite e diffusore in acrilico bianco

Built-in LED aluminium flood lamp anthracite finish with acrylic white diffuser

Sorgente luminosa
Light sourceLuce
Light**Materiale**

Alluminio diffusore in acrilico

Colore

Antracite

Sorgente luminosa

LED SMD 10W - 20W - 30W - 50W

Flusso luminoso

800 Lm - 1600Lm - 2400 Lm - 4000 Lm

Driver

Integrato

Temperatura colore

3000K - 4000K - 6500K

**Durata e on/off**

25.000 h >10.000 on/off

Angolo di luce

120°

CRI

>80

Material

Aluminium acrylic

Colour

Anthracite

Light source

LED SMD 10W - 20W - 30W - 50W

Luminous flux

800 Lm - 1600Lm - 2400 Lm - 4000 Lm

Driver

Built-in

Colour temperature

3000K - 4000K - 6500K

**Lifetime and on/off**


25.000 h >10.000 on/off

Beam angle

120°

CRI



>80

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-PLUTONE-10

LED-PLUTONE-10
8031414875887

10W - 800 LM

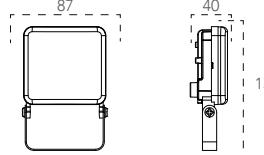Misure - size
dimensioni in mm - size mmFOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-PLUTONE-20

LED-PLUTONE-20C
8031414876099



20W - 1600 LM

LED-PLUTONE-20
8031414875894

20W - 1600 LM

LED-PLUTONE-20F
8031414876112

20W - 1600 LM

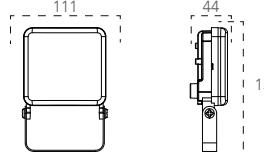

Misure - size
dimensioni in mm - size mmFOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-PLUTONE-30

LED-PLUTONE-30
8031414875900

30W - 2400 LM

PF 0,90

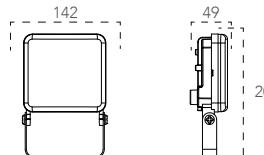Misure - size
dimensioni in mm - size mmFOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-PLUTONE-50

LED-PLUTONE-50C
8031414879144

50W - 4000 LM

PF 0,90

LED-PLUTONE-50
8031414875917


50W - 4000 LM

PF 0,90

LED-PLUTONE-50F
8031414879120

50W - 4000 LM

PF 0,90

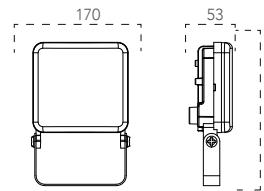Misure - size
dimensioni in mm - size mm

PLUTONE



Proiettore

Flood lamp



Materiale

Alluminio diffusore in acrilico

Colore

Antracite

Sorgente luminosa

LED SMD 20W - 50W

Flusso luminoso

1600 Lm - 4000 Lm

Driver

integrato

Temperatura colore

4000K

Durata e on/off

25.000 h >10.000 on/off

Angolo di luce

120°

CRI

>80

Materiale

Aluminium with white acrylic diffuser

Colour

Anthracite

Sorgente luminosa

LED SMD 20W - 50W

Luminous flux

800 Lm - 2400 Lm

Driver

Built-in

Colour temperature

4000K

Lifetime and on/off

25.000 h >10.000 on/off

Beam angle

120°

CRI

>80

CLASSE
A CE EMC



Sorgente luminosa
Light source



Luce
Light

PLUTONE



Proiettore LED portatile

LED portable flood light



LED-PLUTONE-S20
8031414875924

20W - 1600 Lm

Accessori inclusi
Accessories included

sensore di movimento regolabile
adjustable motion sensor

3-2000 LUX

off

on

max 8 m 120°

10s - 7 min.

off


Misure - size

dimensioni in mm - size mm

111 - 58 - 182

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

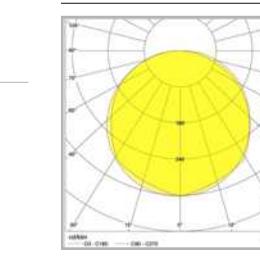

LED-PLUTONE-S20

CLASSE
A CE EMC

Materiale

Alluminio diffusore in acrilico

Colore

Antracite

Sorgente luminosa

LED SMD 20W

Flusso luminoso

1600 Lm

Driver

integrato

Temperatura colore

4000K

Durata e on/off

25.000 h >10.000 on/off

Angolo di luce

120°

CRI

>80

Material

Aluminium with white acrylic diffuser

Colour

Anthracite

Light source

LED SMD 20W

Luminous flux

1600 Lm

Driver

Built-in

Colour temperature

4000K

Lifetime and on/off

25.000 h >10.000 on/off

Beam angle

120°

CRI

>80



LED-PLUTONE-S50
8031414875931

50W - 4000 Lm

Accessori inclusi
Accessories included

sensore di movimento regolabile
adjustable motion sensor

3-2000 LUX

off

on

max 8 m 120°

10s - 7 min.

off


Misure - size

dimensioni in mm - size mm

170 - 60 - 235

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

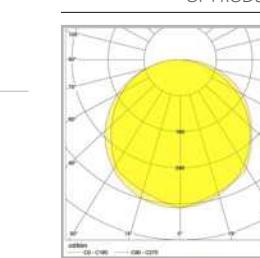


LED-PLUTONE-S50

CLASSE
A CE EMC



FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

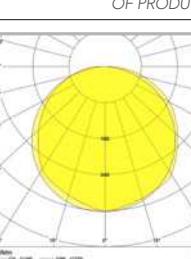

LED-PLUTONE-P20

LED-PLUTONE-P20
8031414875948

20W - 1600 Lm


Accessori inclusi
Accessories included

Cavo 1,6 metri c/spina



Misure - size

dimensioni in mm - size mm

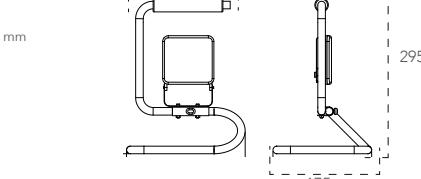

HARALD

Proiettore a led integrato in alluminio grigio con funzione Bluetooth Sig mesh, compatibili con dispositivi iOS, android e VOICE CONTROL

Built-in LED aluminium flood lamp grey finish with Bluetooth Sig mesh function, compatible with iOS, android and VOICE CONTROL devices



Sorgente luminosa
Light source




SMART INTEC
Bluetooth
Sig mesh

Proiettore
Materiale
Alluminio
Colore
Grigio
Sorgente luminosa
LED SMD 30W - 50W
Driver
Integrato
Temperatura colore
RGB CCT
Punti luce
1
Flusso luminoso
3300 Lm
Durata e on/off
25.000h >15.000 on/off
Angolo di luce
120°
CRI
>70
Grado IK
IK06


Flood lamp
Material
Aluminium
Colour
Grey
Light source
LED SMD 30W - 50W
Driver
Built-in
Colour temperature
RGB CCT
Number of light sources
1
Luminous Flux
5200 Lm
Lifetime and on/off
25.000h >15.000 on/off
Beam angle
120°
CRI
>70
IK degree
IK06



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT




LED-HARALD-BT30
8031414878956
30W
3200 Lm
PF 0,90

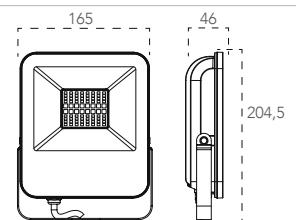


Misure - size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT



LED-HARALD-BT50
8031414878963
50W
5200 Lm
PF 0,90

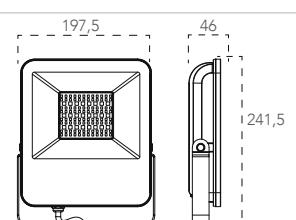

Misure - size
dimensioni in mm - size mm

TAURUS

Sorgente luminosa
Light source

Proiettore a led integrato in alluminio nero diffusore in vetro temperato

Built-in LED aluminium flood lamp black aluminium body with tempered glass diffuser

**Materiale**

Alluminio antracite

Colore

Nero

Sorgente luminosa

LED SMD

Flusso luminoso

8400 Lm - 12000 Lm - 18000 Lm - 24000 Lm

Driver

integrale

Temperatura colore

6500K - 4000K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce

110°

CRI

>80

Grado IK

IK07

Material

Aluminium

Colour

Black

Light source

LED SMD

Luminous flux

8400 Lm - 12000 Lm - 18000 Lm - 24000 Lm

Driver

Built-in

Colour temperature

6500K - 4000K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle

110°

CRI

>80

IK degree

IK07



FOTOMETRIA DEL PRODOTTO	
PHOTOMETRIC CURVE OF PRODUCT	

LED-TAURUS-70



FOTOMETRIA DEL PRODOTTO	
PHOTOMETRIC CURVE OF PRODUCT	

LED-TAURUS-100



FOTOMETRIA DEL PRODOTTO	
PHOTOMETRIC CURVE OF PRODUCT	

LED-TAURUS-150



FOTOMETRIA DEL PRODOTTO	
PHOTOMETRIC CURVE OF PRODUCT	

LED-TAURUS-200

LED-TAURUS-70	70W		8400 LM
LED-TAURUS-70F	70W		8400 LM

LED-TAURUS-100	100W		12000 LM
LED-TAURUS-100F	100W		12000 LM

Misure - size	dimensioni in mm - size mm

LED-TAURUS-150	150W		18000 LM
LED-TAURUS-150F	150W		18000 LM

Misure - size	dimensioni in mm - size mm

LED-TAURUS-200	200W		24000 LM
LED-TAURUS-200F	200W		24000 LM

Misure - size	dimensioni in mm - size mm

ACCESSORI PROIETTORI / FLOOD LIGHT ACCESSORIES



I-FRAME-L-GR
8031440361880

Staffa fissaggio angolare colore grigio
Metal corner wall arms gray color



I-FRAME-L-BCO
8031440364577

Staffa fissaggio angolare colore bianco
Metal corner wall arms white color




I-FRAME-V-GR
8031440364584

Staffa V mobile 30° fissaggio parete colore grigio
Metal wall arms orientable 30° gray color



I-FRAME-V-BCO
8031440364553

Staffa V mobile 30° fissaggio parete colore bianco
Metal wall arms orientable 30° white color

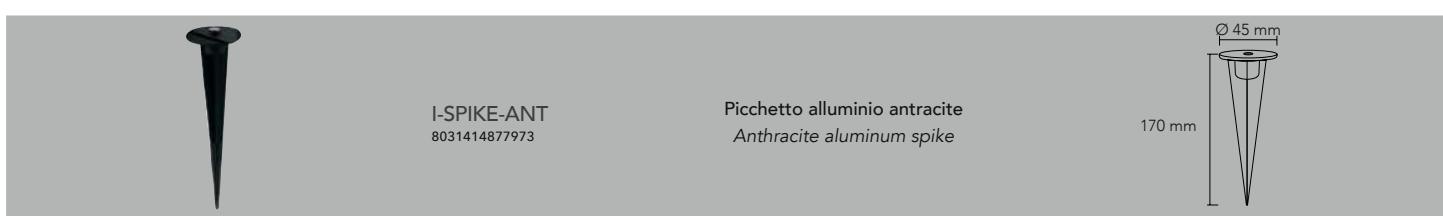

I-SPIKE-ANT
8031414877973

Picchetto alluminio antracite
Anthracite aluminum spike

ACCESSORI PROIETTORI / FLOOD LIGHT ACCESSORIES




I-TRIPOD
8031440361729



Cavo 2,8 metri c/spina



Accessori per proiettori
Sistema di fissaggio singolo e doppio
Flood light accessories
Single and double connection system

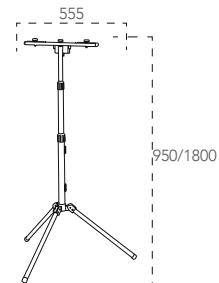


SENSORI / SENSORS

SENSORI ADATTABILI A QUALSIASI PRODOTTO ILLUMINOTECNICO
SENSORS COMPATIBLE FOR ANY LIGHTING PRODUCTS




IP44
I-SENSORE-360
8031435901237

Sensore PIR 230V max 1600W 360°
distanza massima 5m.
time 10 sec. - 4 min.
lux 2 - 2000




IP44
I-SENSORE-130
8031434401219

Sensore PIR 230V max 1000W 130°
distanza massima 12m.
time 10 sec. - 4 min.
lux 2 - 2000 base accessoria angolare



IP44
I-SENSORE-180
8031434411218


Sensore PIR 230V max 1000W 180°
distanza massima 12m.
time 10 sec. - 4 min.
lux 2 - 2000



GIOVE

Proiettore LED integrato struttura in alluminio pressofuso e diffusore in vetro temperato

Built-in LED floor light die-cast aluminium body and tempered glass diffuser

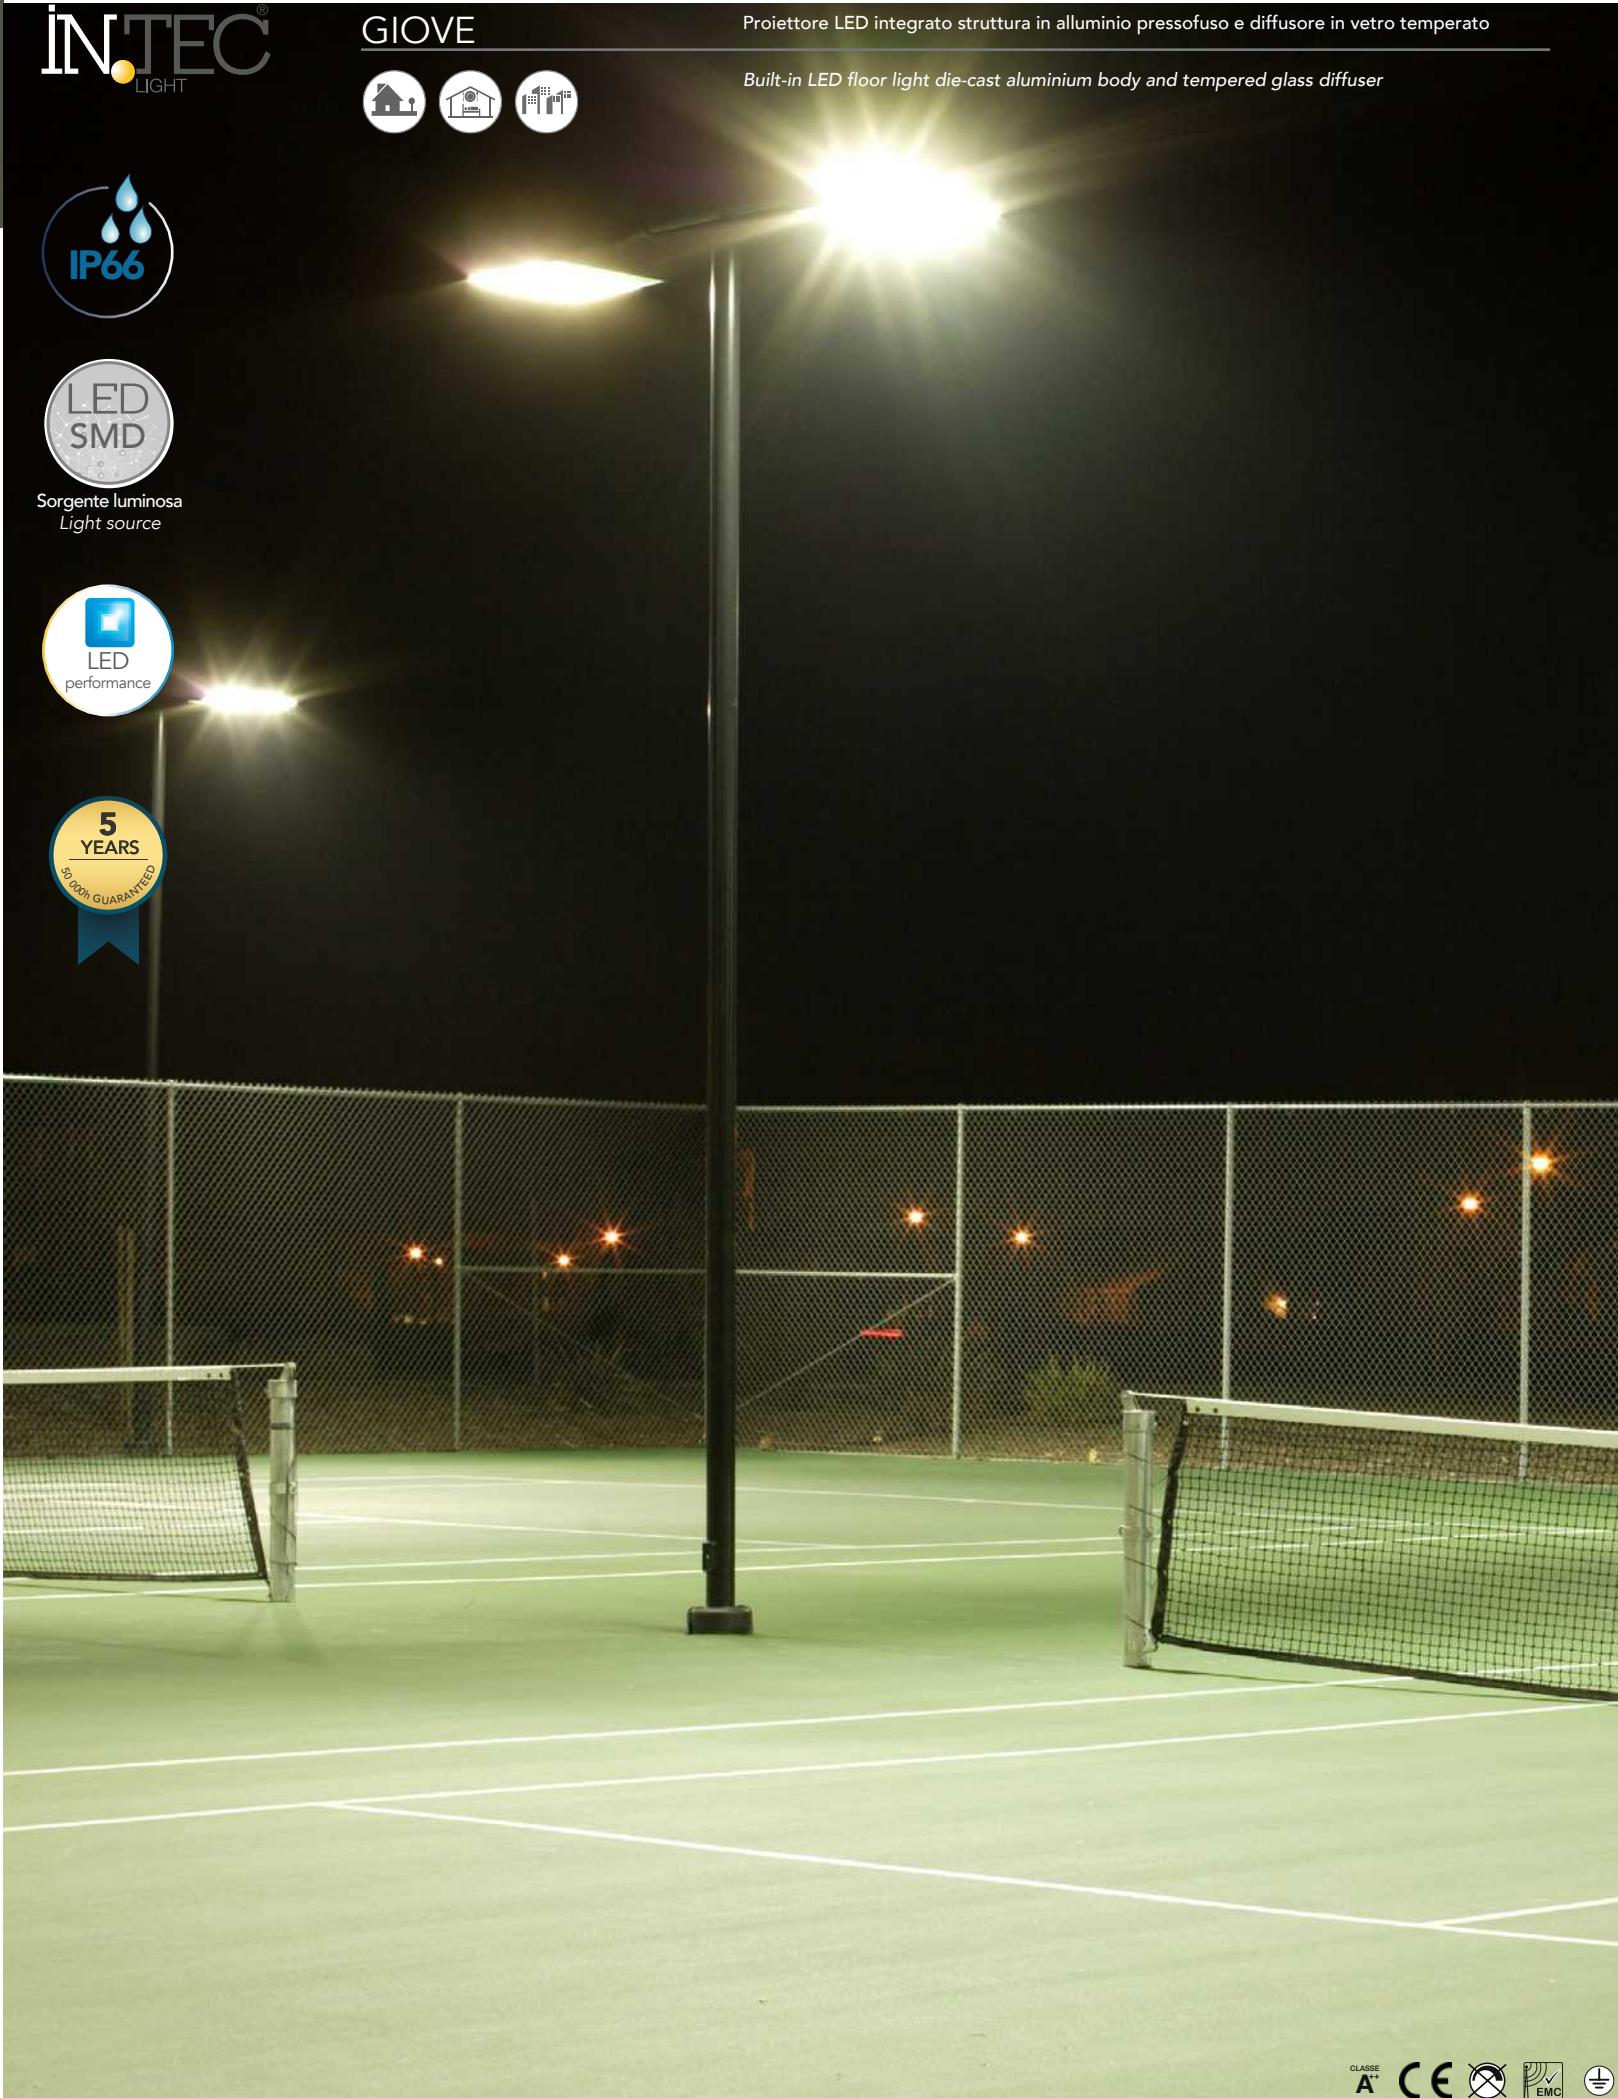Sorgente luminosa
Light source

Materiale

Alluminio

Colore

Nero

Sorgente luminosa

LED SMD 200W - 300W - 400W

Flusso luminoso

32000 Lm - 47000 Lm - 66000 Lm

Driver

incluso

Temperatura colore

6000K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce

150°x 80°

CRI

>70

Grado IK

IK08

Materiale

Aluminium

Colour

Black

Sorgente luminosa

LED SMD 200W - 300W - 400W

Luminous flux

32000 Lm - 47000 Lm - 66000 Lm

Driver

included

Colour temperature

6000K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle


150°x 80°

CRI

>70

IK degree



IK08

FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

LED-GIOVE-200

LED-GIOVE-200
8031414876365



200W - 32000 LM PF 0,90

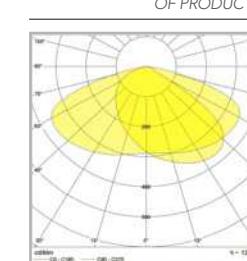FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

LED-GIOVE-300

LED-GIOVE-300
8031414876372


300W - 47000 LM PF 0,90

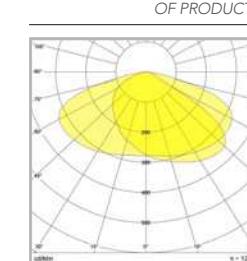
FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

LED-GIOVE-300

LED-GIOVE-400
8031414876389

400W - 66000 LM PF 0,90



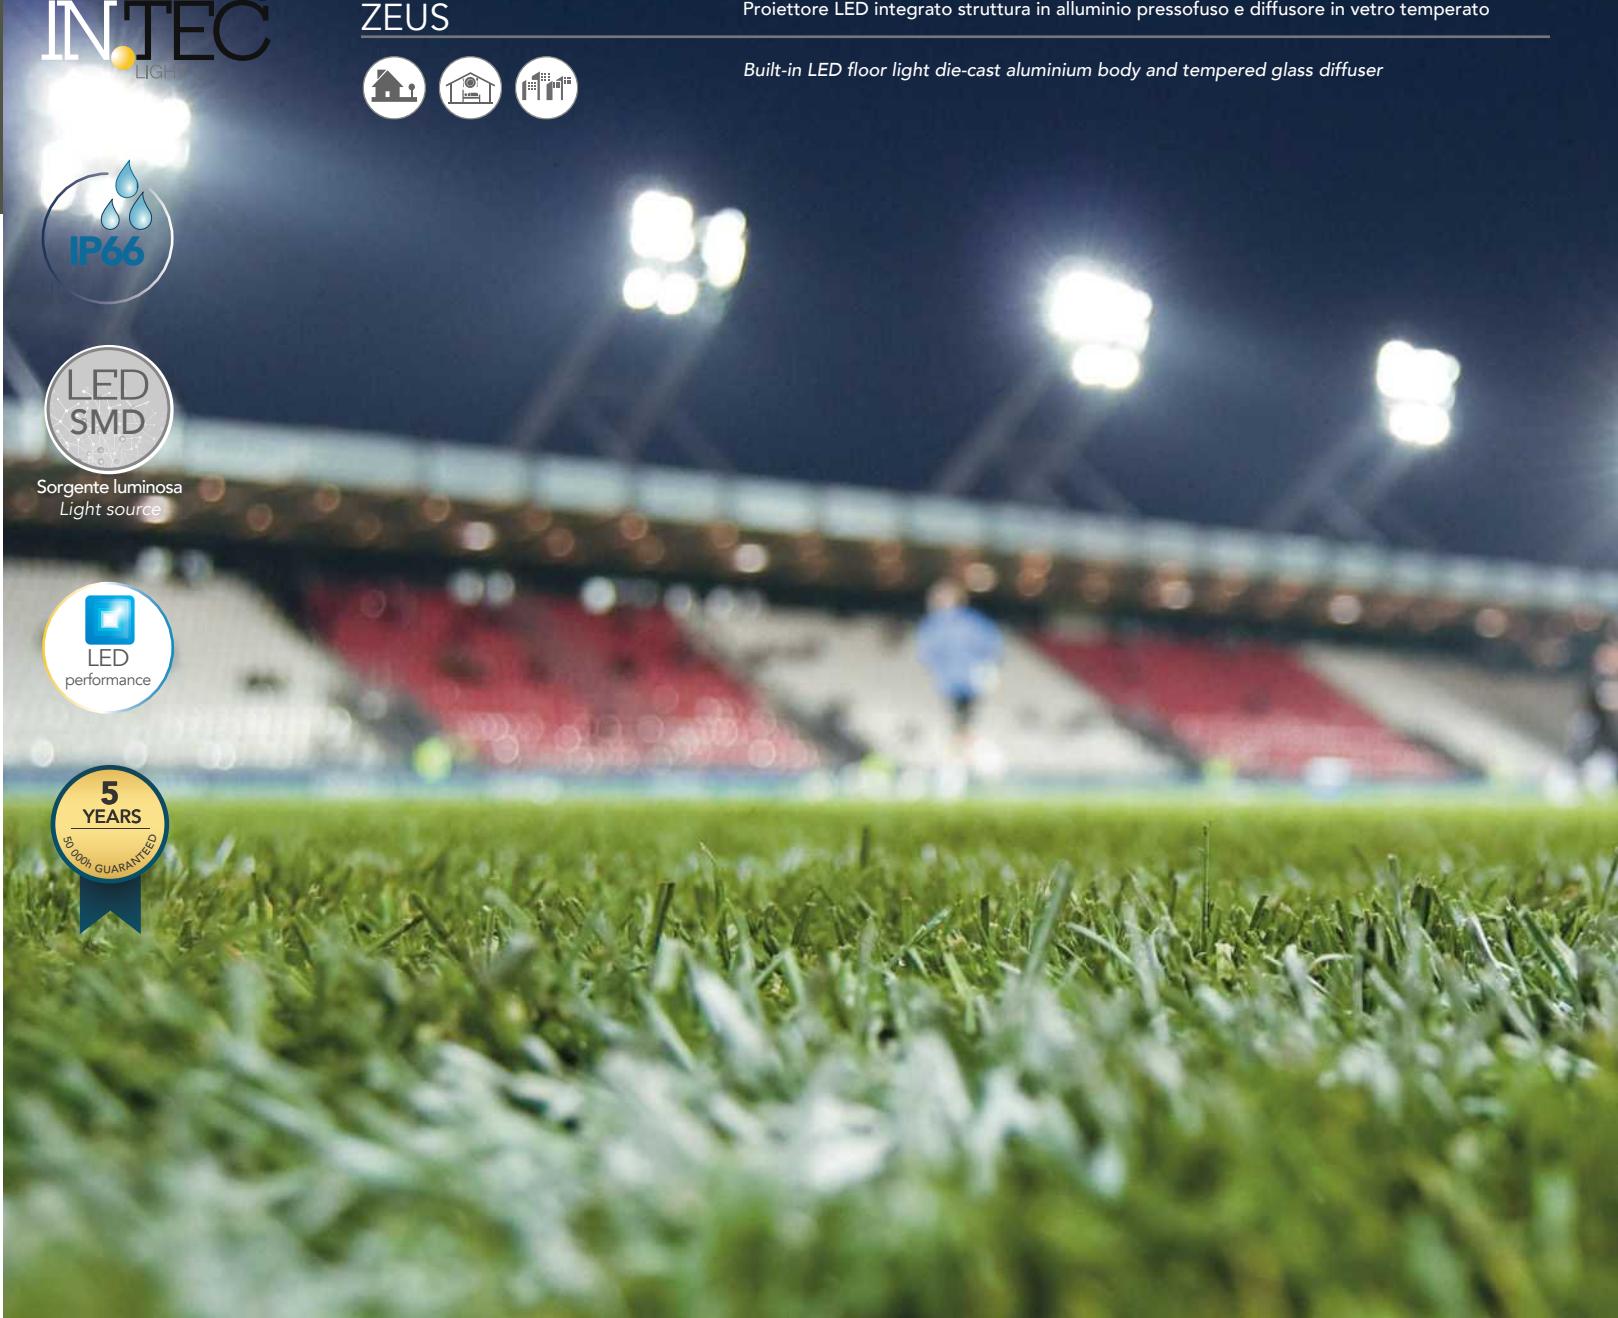Sorgente luminosa
Light source**Materiale**

Alluminio

Colore

Nero

Sorgente luminosa

LED SMD 100W - 180W - 240W

Flusso luminoso

16000 Lm - 28800 Lm - 38400 Lm

Driver

incluso

Temperatura colore

5000K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce

110°

CRI

>70

Grado IK

IK08

Material

Aluminium

Colour

Black

Light source

LED SMD 100W - 180W - 240W

Luminous flux

16000 Lm - 28800 Lm - 38400 Lm

Driver

included

Colour temperature

5000K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle


110°

CRI

>70

IK degree

IK08


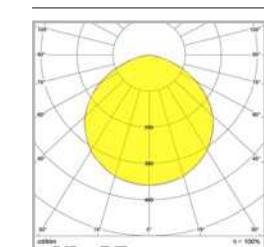
FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-ZEUS-100

LED-ZEUS-100
8031414868445

100W - 16000 LM

PF 0,95

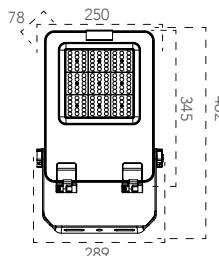
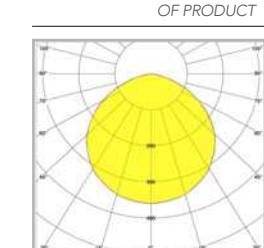
Misure - size
dimensioni in mm - size mmFOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-ZEUS-180

LED-ZEUS-180
8031414868452

180W - 28800 LM

PF 0,95

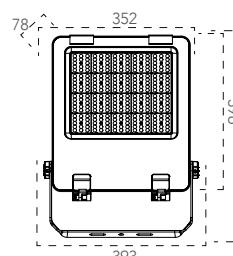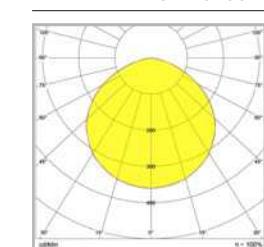
Misure - size
dimensioni in mm - size mmFOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

LED-ZEUS-240

LED-ZEUS-240
8031414868469

240W - 38400 LM

PF 0,95

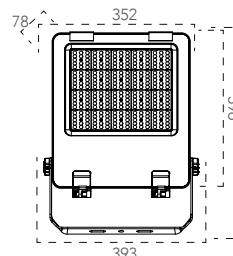Misure - size
dimensioni in mm - size mm

MASTER



Proiettore LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV

Built-in LED floor light die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material



IP65

Sorgente luminosa
Light sourceLED
performance**Materiale**

Alluminio

Colore

Nero

Sorgente luminosa

LED SMD 480W - 960W

Flusso luminoso

64800 Lm - 129600 Lm

Driver

incluso

Temperatura colore

5700K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce*

60x100°

CRI

>80

Grado IK

IK10

Material

Aluminum

Colour

Black

Light source

LED SMD 480W - 960W

Luminous flux

64800 Lm - 129600 Lm

Driver

included

Colour temperature

5700K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle*

60x100°

CRI

>80

IK degree

IK10

*Lenti per regolazione angolo fascio luminoso su ordinazione
Optional lens for different beam angle available




LED-MASTER-480
8031414862115


480W - 64800 LM
PF 0,90

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT



LED-MASTER-480

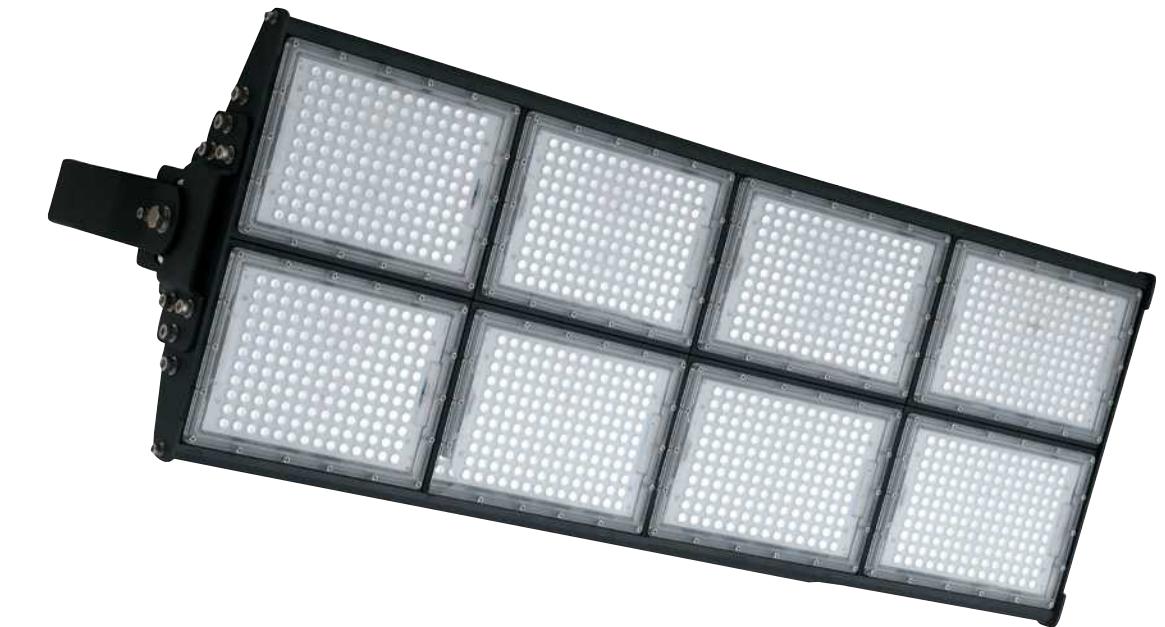


LED-MASTER-960
8031414862122

960W - 129600 LM
PF 0,90


FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

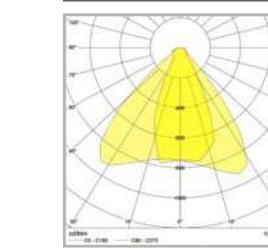


LED-MASTER-960

Misure - size
dimensioni in mm - size mm

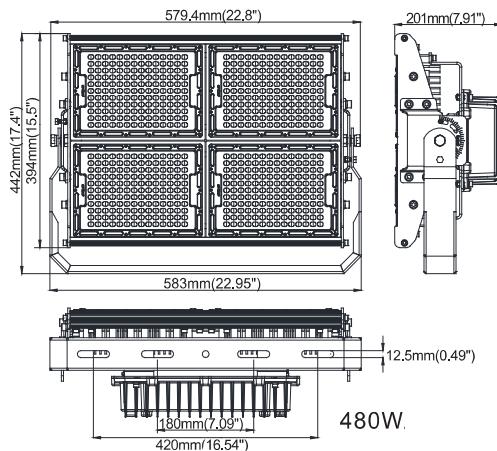

Misure - size
dimensioni in mm - size mm

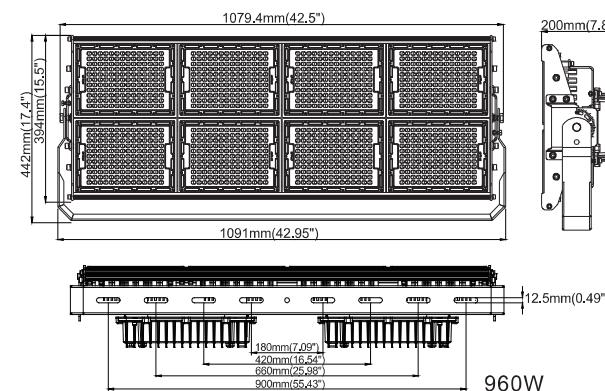




Faro LED integrato per pensilina struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antirusto, anti-UV

Gas station built-in LED light in die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material



Sorgente luminosa
Light source

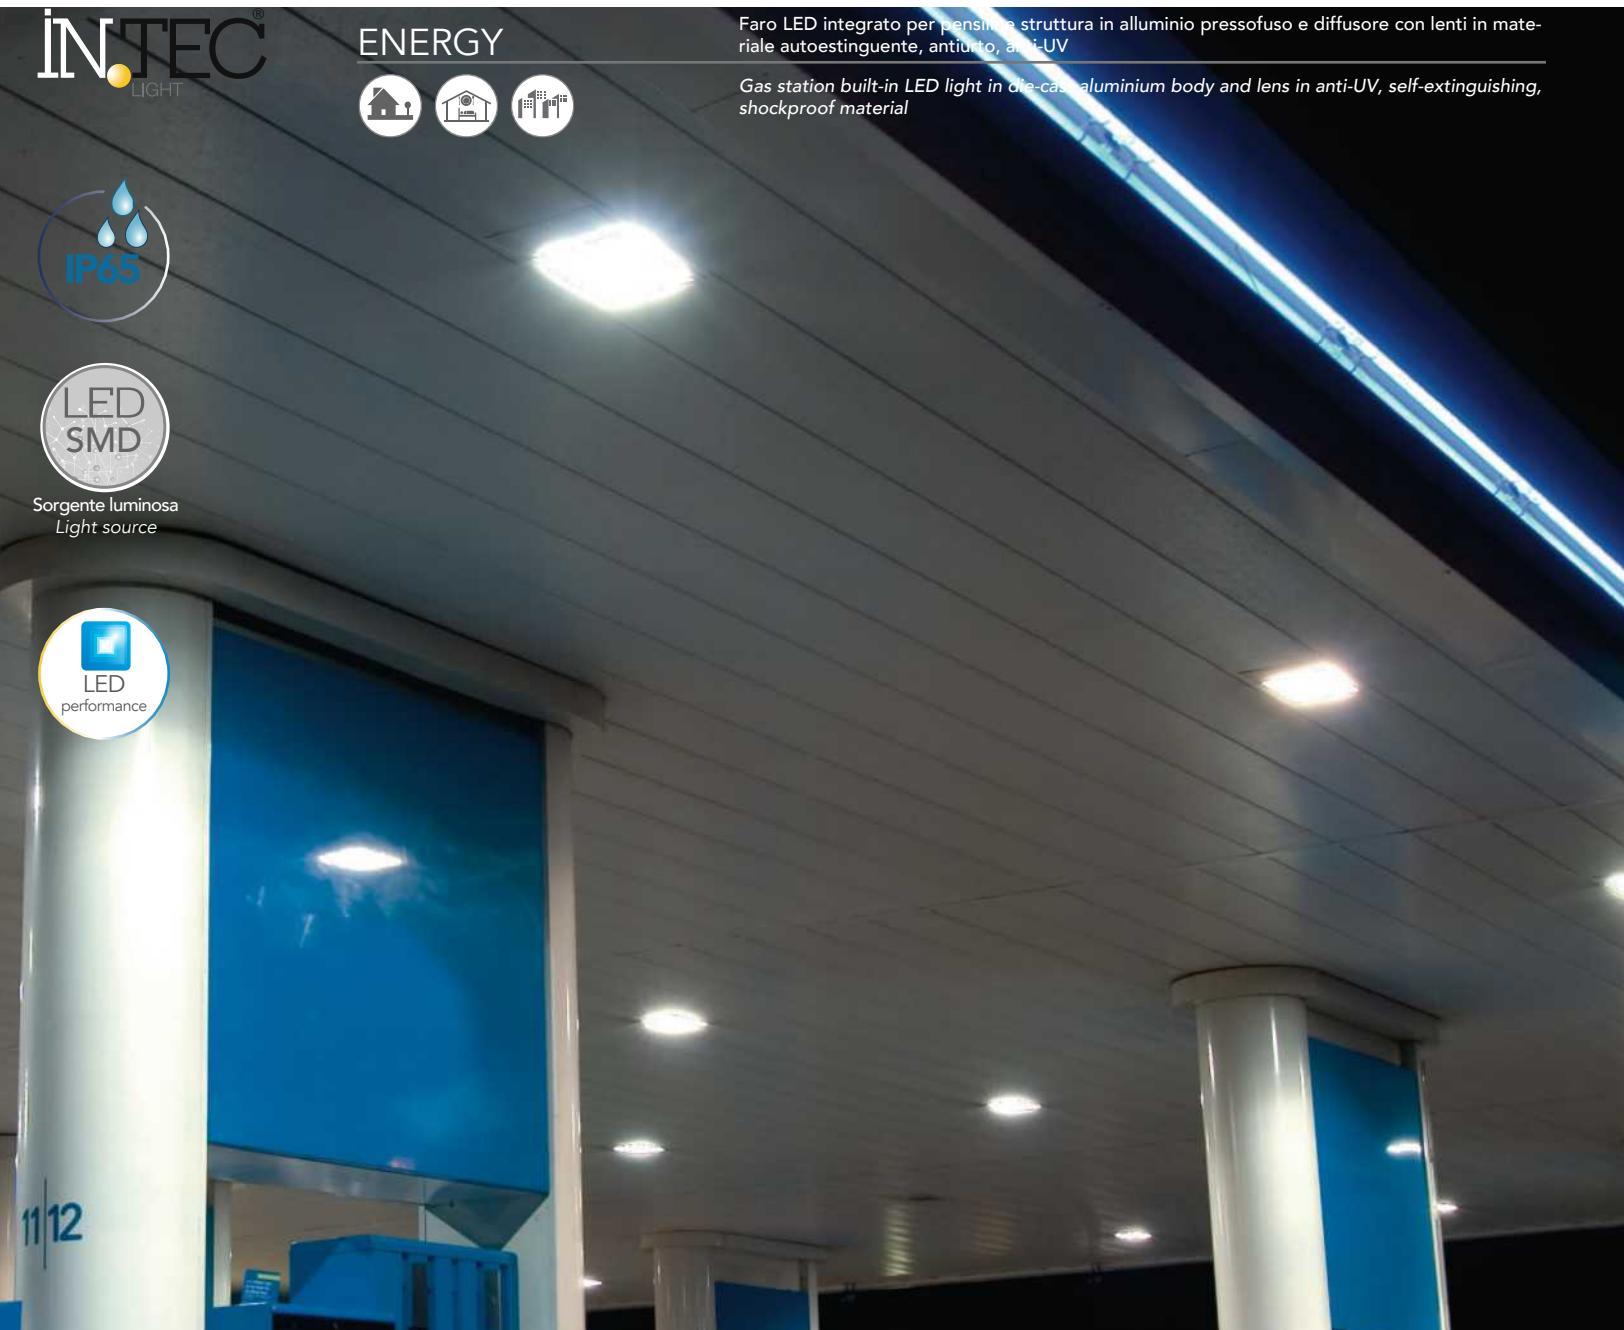
Materiale

Alluminio

Colore

Bianco

Sorgente luminosa

LED SMD 80W

Flusso luminoso

10500 Lm

Driver

incluso

Temperatura colore

4000K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce*

80°

CRI

>80

Grado IK

IK10

Material

Aluminum

Colour

White

Light source

LED SMD 80W

Luminous flux

10500 Lm

Driver

included

Colour temperature

4000K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle*

80°

CRI

>80

IK degree


IK10

LED-ENERGY-80-INC
8031414862085


80W - 10500 LM
PF 0,90



Misure - size
dimensioni in mm - size mm

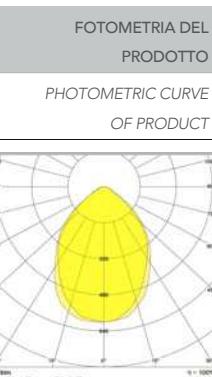

LED-ENERGY-80-INC

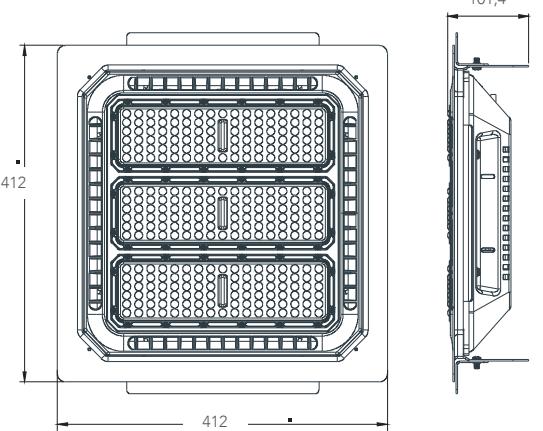


LED-ENERGY-80-PL
8031414862078


80W - 10500 LM
PF 0,90



Misure - size
dimensioni in mm - size mm

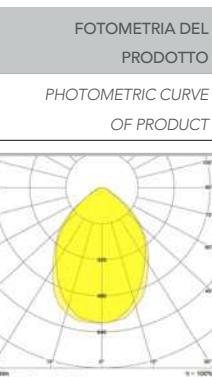

LED-ENERGY-80-PL

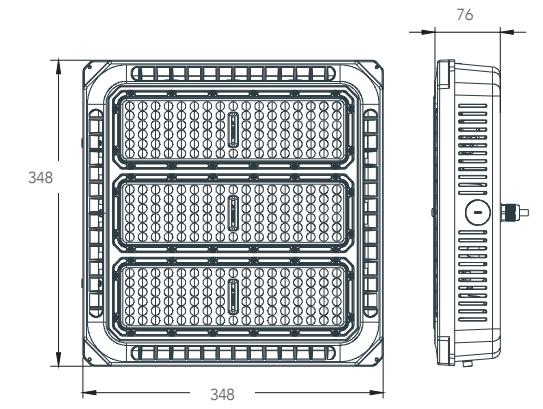

MOTION

Faro stradale LED in alluminio antracite con sensore e pannello solare

Anthracite aluminium LED street light with sensor and solar panel



Sorgente luminosa
Light source



Materiale

Alluminio

Colore

Antracite

Sorgente luminosa

LED SMD 7W

Flusso luminoso

510 Lm

Batteria

lithium 3,2V 10000 mAh

Temperatura colore

6000K

Angolo di luce

120°

Material

Aluminium

Colour

Anthracite

Light source

LED SMD 7W

Luminous flux

510 Lm

Battery

lithium 3,2V 10000 mAh

Colour temperature

6000K

Beam angle

120°

LED-MOTION-60-SOLAR
8031414868254

7W


Accessori inclusi
Accessories included



sensore crepuscolare
crepuscular sensor



sensore di movimento
motion sensor




Pannello solare
Solar panel



Radiocomando
Incluso - included




Misure - size
dimensioni in mm - size mm

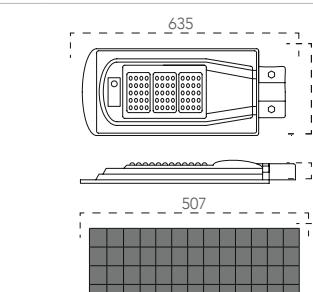

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT



LED-MOTION-60-SOLAR

INVICTUS

Faro stradale LED in alluminio antracite con pannello solare, diffusore con lenti in materiale autoestinguente, antiurto, anti-UV

Anthracite aluminium LED street light with solar panel and lens in anti-UV, self-extinguishing, shockproof material



Sorgente luminosa
Light source



Sorgente luminosa
Light source



Materiale

Alluminio

Colore

Silver

Materiale pannello solare

Celle in silicio monocristallino

Sorgente luminosa

LED SMD 15W

Flusso luminoso

2400 Lm

Batteria

lithium 3,2V 36000 mAh

Colour temperature

4000K

Angolo di luce

90°x120°

LED-INVICTUS-SOLAR
8031414879090

15W

Accessori inclusi
Accessories included



Pannello solare
Solar panel




Radiocomando
Incluso - included




FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT

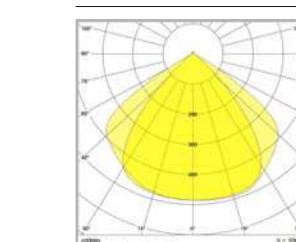

LED-INVICTUS-SOLAR

Misure - size
dimensioni in mm - size mm

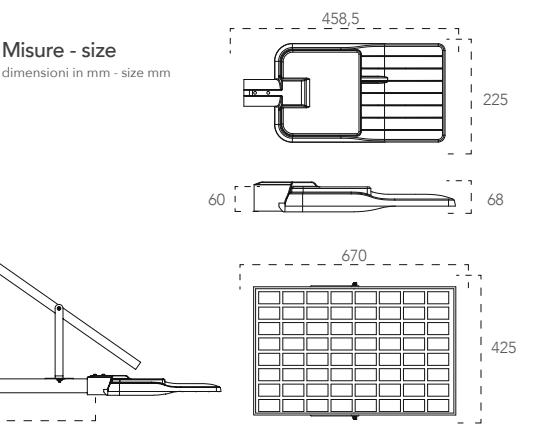


IPERION




Lenti in materiale autoestinguente, antiurto, anti-UV
lens in anti-UV, self-extinguishing, shockproof material

Sensore microwave
Microwave sensor

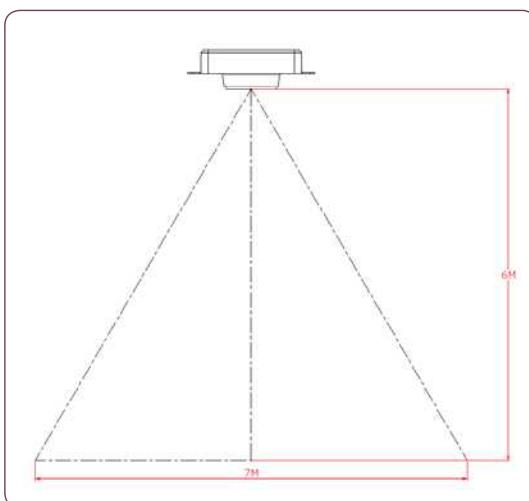

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

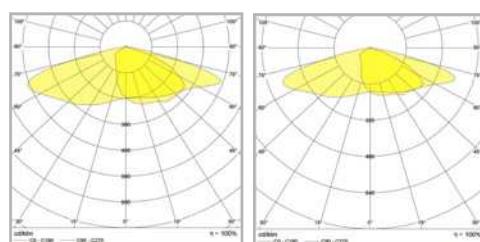

LED-IPERION-50-SOLAR LED-IPERION-75-SOLAR

Faro stradale LED in alluminio antracite con pannello solare

Anthracite aluminium LED street light with solar panel



Sorgente luminosa
Light source

Materiale

Alluminio

Colore

Silver

Materiale pannello solare

Celle in silicio monocristallino

Sorgente luminosa

LED SMD 50W - 75W

Flusso luminoso

9000 Lm - 13500 Lm

Batteria

50W - lithium 12,8V 54000 mAh

75W - lithium 25,6V 36000 mAh

Temperatura colore

4000K

Angolo di luce

156°x71°

Material

Aluminium

Colour

Silver

Solar panel material

Monocrystalline silicon

Light source

LED SMD 50W - 75W

Luminous flux

9000 Lm - 13500 Lm

Battery

50W - lithium 12,8V 54000 mAh

75W - lithium 25,6V 36000 mAh

Colour temperature

4000K

Beam angle

156°x71°

LED-IPERION-50-SOLAR


50W - 9000 LM

LED-IPERION-75-SOLAR

75W - 13500 LM

Accessori inclusi
Accessories included



Pannello solare
Solar panel



Palo 60 cm
Pole 60 cm



Misure - size
dimensioni in mm - size mm

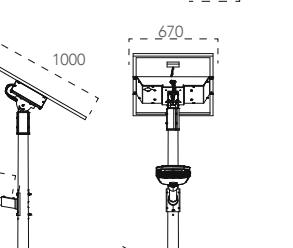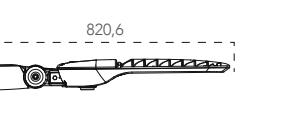

LED-IPERION-REMOTE
8031414879083

Radiocomando multifunzione
Remote control multi-mode control

FEBO



Faro stradale LED in alluminio con pannello solare

Aluminium LED street light with solar panel



Sorgente luminosa
Light source

Materiale

Alluminio

Colore

Silver

Materiale pannello solare

Celle in silicio monocristallino

Sorgente luminosa

LED SMD 40W

Flusso luminoso

6800 Lm

Batteria



lithium 15V 25000 mAh

Temperatura colore

4000K

Angolo di luce

156°x71°



Sorgente luminosa
Light source

Beam angle

156°x71°



Lenti in materiale autoestinguente, antiurto, anti-UV
lens in anti-UV, self-extinguishing, shockproof material

LED-FEBO-SOLAR
8031414879052


40W

Accessori inclusi
Accessories included

Pannello solare
Solar panel




Misure - size
dimensioni in mm - size mm


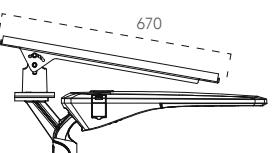


FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

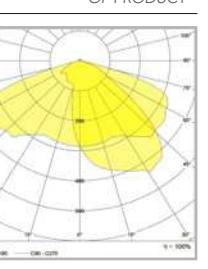

LED-FEBO-SOLAR 40W

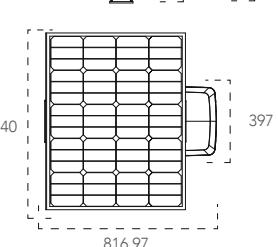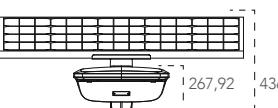

STREETWAY



Faro stradale LED integrato struttura in alluminio pressofuso e diffusore in materiale autoestinguente, antiurto, anti-UV

Built-in LED street light die-cast aluminium body and lens in anti-UV, self-extinguishing shockproof material



Sorgente luminosa
Light source



Materiale

Alluminio

Colore

Silver

Sorgente luminosa

LED SMD 50W - 100W - 150W - 200W

Flusso luminoso

6500 Lm - 13000 Lm - 20250 Lm - 27000 Lm

Driver

incluso

Temperatura colore

4000K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce

80°x140°

CRI

>70

Grado IK

IK10

Material

Aluminium

Colour

Silver

Light source

LED SMD 50W - 100W - 150W - 200W

Luminous flux

6500 Lm - 13000 Lm - 20250 Lm - 27000 Lm

Driver

incluso

Colour temperature

4000K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle

80°x140°

CRI

>70

IK degree



IK10



LED-STREETWAY-50
8031414876334

50W - 6500 LM PF 0,90

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

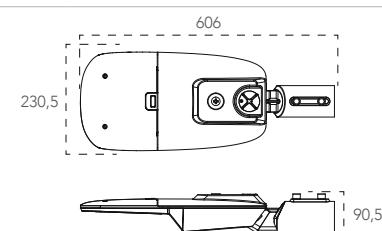



LED-STREETWAY-50W



LED-STREETWAY-100
8031414876341

100W - 12500 LM PF 0,90

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

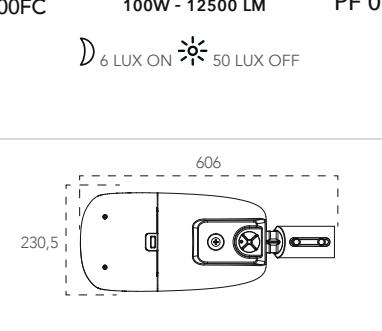



LED-STREETWAY-100W



LED-STREETWAY-150
8031414876358

150W - 19200 LM PF 0,90

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

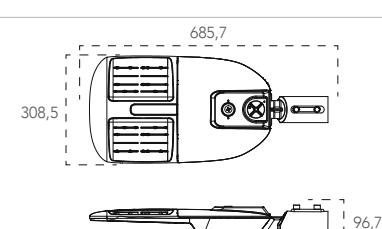



LED-STREETWAY-150W



LED-STREETWAY-200
8031414879106

200W - 24000 LM PF 0,90

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

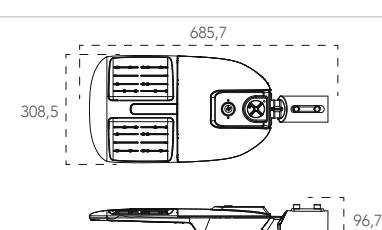

LED-STREETWAY-200W

HIGHWAY



Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV

Built-in LED street light die-cast aluminium body and lens in anti-UV, self-extinguishing shockproof material



Sorgente luminosa
Light source



Materiale

Alluminio

Colore

Antracite

Sorgente luminosa

LED SMD 50W - 100W- 150W

Flusso luminoso

6000 Lm - 12000 Lm - 18000 Lm

Driver

incluso

Temperatura colore

4000K

Durata e on/off

30.000 h >15.000 on/off

Angolo di luce

135X80°

CRI

>70

Grado IK

IK06

Material

Aluminium

Colour

Anthracite

Light source

LED SMD 50W - 100W- 150W

Luminous flux

6000 Lm - 12000 Lm - 18000 Lm

Driver

included

Colour temperature

4000K

Lifetime and on/off

30.000 h >15.000 on/off

Beam angle

135X80°

CRI

>70

IK degree

IK06




LED-HIGHWAY-50
8031414877034

50W - 6000 LM

PF 0,90

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT




LED-HIGHWAY-100
8031414877041

100W - 12000 LM

PF 0,90

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

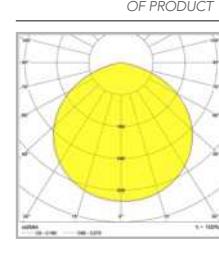


LED-HIGHWAY-150
8031414877058

150W - 18000 LM

PF 0,90

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT



LED-HIGHWAY-ADAT
8031414877904

Adattatore 90° armature stradali
highway imbocco palo 60mm
90°adapter 60mm pole entry for
street light

171

60

221,5

65,2

140

221,5

171

60

221,5

65,2

140

221,5

LED-HIGHWAY-ADAT-S
8031414878734

Adattatore 90° armature stradali
highway imbocco palo 50mm
90°adapter 50mm pole entry for
street light

171

60

221,5

65,2

140

221,5

Faro stradale LED con fissaggio su palo verticale orizzontale più versione a sospensione, in alluminio pressofuso con diffusore in vetro temperato.


Built-in LED street light die-cast aluminium body with tempered glass diffuser structure with mount bracket on vertical or horizontal pole and version with suspension mount bracket



Sorgente luminosa
Light source





Materiale	Material
Alluminio pressofuso	Die-cast aluminum
Colore	Colour
Silver	Silver
Sorgente luminosa	Light source
LED SMD 50W	LED SMD 50W
Driver	Driver
incluso	included
Temperatura colore	Colour temperature
4000K	4000K
Flusso luminoso	Luminous flux
7000 LM	7000 LM
Durata e on/off	Lifetime and on/off
50.000 h - >25.000 on/off	50.000 h - >25.000 on/off
Angolo di luce	Beam angle
155°x75°	155°x75°
CRI	CRI
>80	>80
Grado IK	IK degree
IK08	IK08

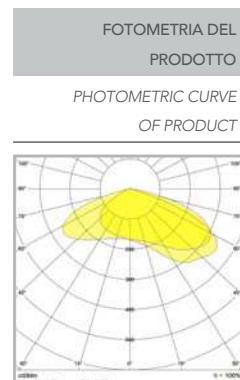

LED-POLIS-50

LED-POLIS-50 50W - 7000 LM PF 0,90


Misure - size
dimensioni in mm - size mm

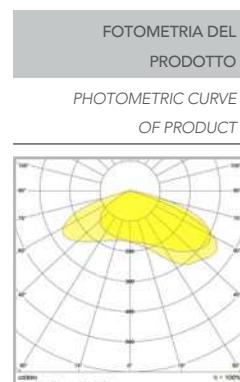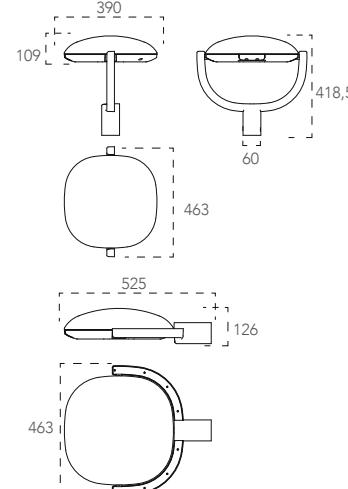

LED-POLIS-S50

LED-POLIS-S50 50W - 7000 LM PF 0,90

Misure - size
dimensioni in mm - size mm

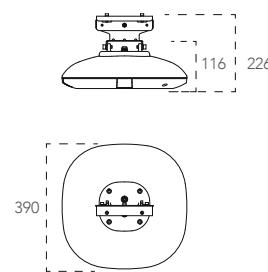

STARGATE XP

Lampada LED high bay in alluminio nero
Black aluminium high bay LED lamp



Sorgente luminosa
Light source

**Materiale**

Alluminio

Colore

Nero

Sorgente luminosa

LED SMD 100W - 150W - 200W

Flusso luminoso

14000 Lm - 21000 Lm - 28000 Lm

Driver

Incluso

Temperatura colore

4000K

Durata e on/off

50.000h >25.000 on/off

Angolo di luce

110°

CRI

>80

Grado IK

IK10

Material

Aluminum

Colour

Black

Light source

LED SMD 100W - 150W - 200W

Luminous flux

14000 Lm - 21000 Lm - 28000 Lm

Driver

Included

Color temperature

4000K

Lifetime and on/off

50.000h >25.000 on/off

Beam angle

110°

CRI

>80


IK degree

IK10




LED-STARGATE-100XP 100W - 14000 LM PF 0,90
8031414877799

Misure - size
dimensioni in mm -
size mm

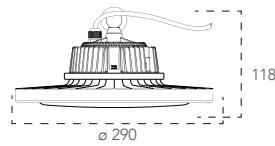


LED-STARGATE-150XP 150W - 21000 LM PF 0,90
8031414877805

Misure - size
dimensioni in mm -
size mm

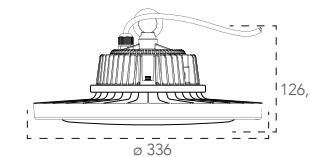




LED-STARGATE-200XP 200W - 28000 LM PF 0,90
8031414877812

Misure - size
dimensioni in mm -
size mm

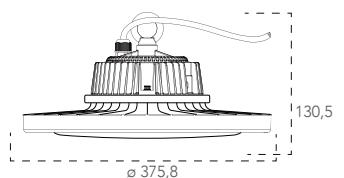

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT

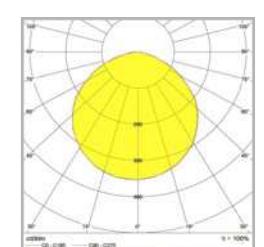

LED-STARGATE-100XP

LED-STARGATE-150XP

LED-STARGATE-200XP

STARGATE

Lampada LED high bay in alluminio nero
Black aluminium high bay LED lamp



Sorgente luminosa
Light source

**Materiale**

Alluminio

Colore

Nero

Sorgente luminosa

LED SMD 100W - 150W - 200W

Flusso luminoso

16500 Lm - 24750 Lm - 33000 Lm

Driver

Driver integrato

Temperatura colore

4000K

Durata e on/off

50.000h >25.000 on/off

Angolo di luce

110°

CRI

>80

Grado IK

IK10

Material

Aluminum

Colour

Black

Light source

LED SMD 100W - 150W - 200W

Luminous flux

16500 Lm - 24750 Lm - 33000 Lm

Driver

Driver built-in

Color temperature

4000K

Lifetime and on/off

50.000h >25.000 on/off

Beam angle

110°

CRI

>80


IK degree

IK10




LED-STARGATE-100-DIM 100W - 16500 LM PF 0,90
8031414868940

Misure - size
dimensioni in mm -
size mm

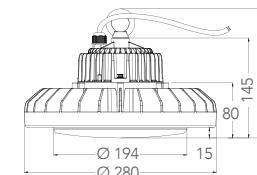


LED-STARGATE-150-DIM 150W - 24750 LM PF 0,90
8031414868957

Misure - size
dimensioni in mm -
size mm

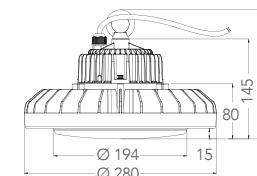




LED-STARGATE-200-DIM 200W - 33000 LM PF 0,90
8031414868964

Misure - size
dimensioni in mm -
size mm

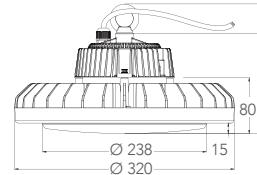

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT



LED-STARGATE-100-DIM

LED-STARGATE-150-DIM

LED-STARGATE-200-DIM


SENSORI / SENSORS

SENSORI INDUSTRIALI DI MOVIMENTO
INDUSTRIAL MOTION SENSORS



LED-SENSOR-HB-DIM
8031414879748

120-277V
Load capacity
120VAC:4A
277VAC:3A

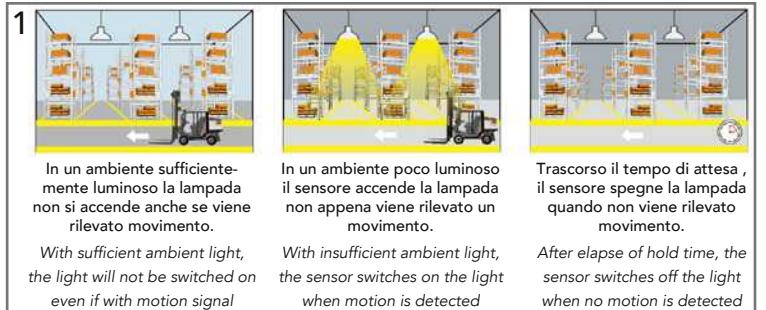

Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.
After elapse of hold time, the sensor switches off the light when no motion is detected

2



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal

Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità
When motion is detected, the sensor will switch on the light to 100% brightness

Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.
With insufficient ambient light, the sensor dims the light at present low light level if no motion is detected

Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.
After elapse of standby period, the sensor switches off the light if no motion is detected

Trascorso il tempo di attesa, il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected

Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.
After elapse of standby period, the sensor switches off the light if no motion is detected


Trascorso il tempo di attesa, il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected

Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.
After elapse of standby period, the sensor switches off the light if no motion is detected



LED-SENSOR-HB
8031414879731

Load capacity
400W
220V - 240V

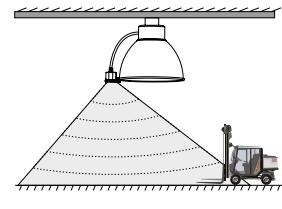

In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal

Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità
When motion is detected, the sensor will switch on the light to 100% brightness

Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.
With insufficient ambient light, the sensor dims the light at present low light level if no motion is detected

Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.
After elapse of standby period, the sensor switches off the light if no motion is detected

Trascorso il tempo di attesa, il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected


Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.
After elapse of standby period, the sensor switches off the light if no motion is detected

Accessori inclusi - accessories included



LED-SENSOR-TP
8031414879724

Load capacity
no limitation
220V - 240V

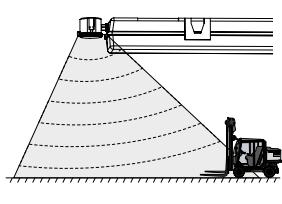

In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal

Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità
When motion is detected, the sensor will switch on the light to 100% brightness

Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.
With insufficient ambient light, the sensor dims the light at present low light level if no motion is detected

Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.
After elapse of standby period, the sensor switches off the light if no motion is detected

Trascorso il tempo di attesa, il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected

Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.
After elapse of standby period, the sensor switches off the light if no motion is detected



LED-SENSOR-REMOTE
8031414879717

Radiocomando per sensori industriali
Industrial sensors remote control

ATLANTIC

Plafoniera stagna per tubi a LED bilampada in PC+PC
Waterproof lamp for double LED tube in PC+PC



Waterproof lamp for double LED tube in PC+PC

Waterproof lamp for double LED tube in PC+PC




IP65



LED-ATLANTIC-ST-60
8031440355315

2xT8 230V
non inclusi - not included

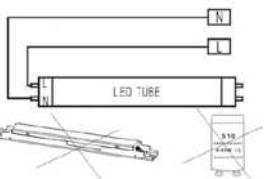


Misure - size
dimensioni in mm - size mm

660 118 74



LED-ATLANTIC-ST-120
8031440355322

2xT8 230V
non inclusi - not included

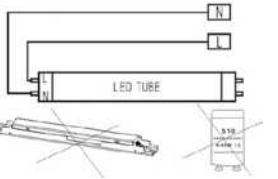


Misure - size
dimensioni in mm - size mm

1260 118 74



LED-ATLANTIC-ST-150
8031440355292

2xT8 230V
non inclusi - not included

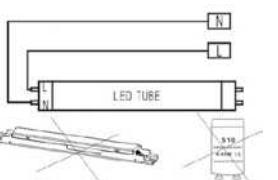

Misure - size
dimensioni in mm - size mm


1560 118 74

CONCORDE



Plafoniera stagna in alluminio e policarbonato LED integrato

Aluminium and PC LED TRI PROOF light

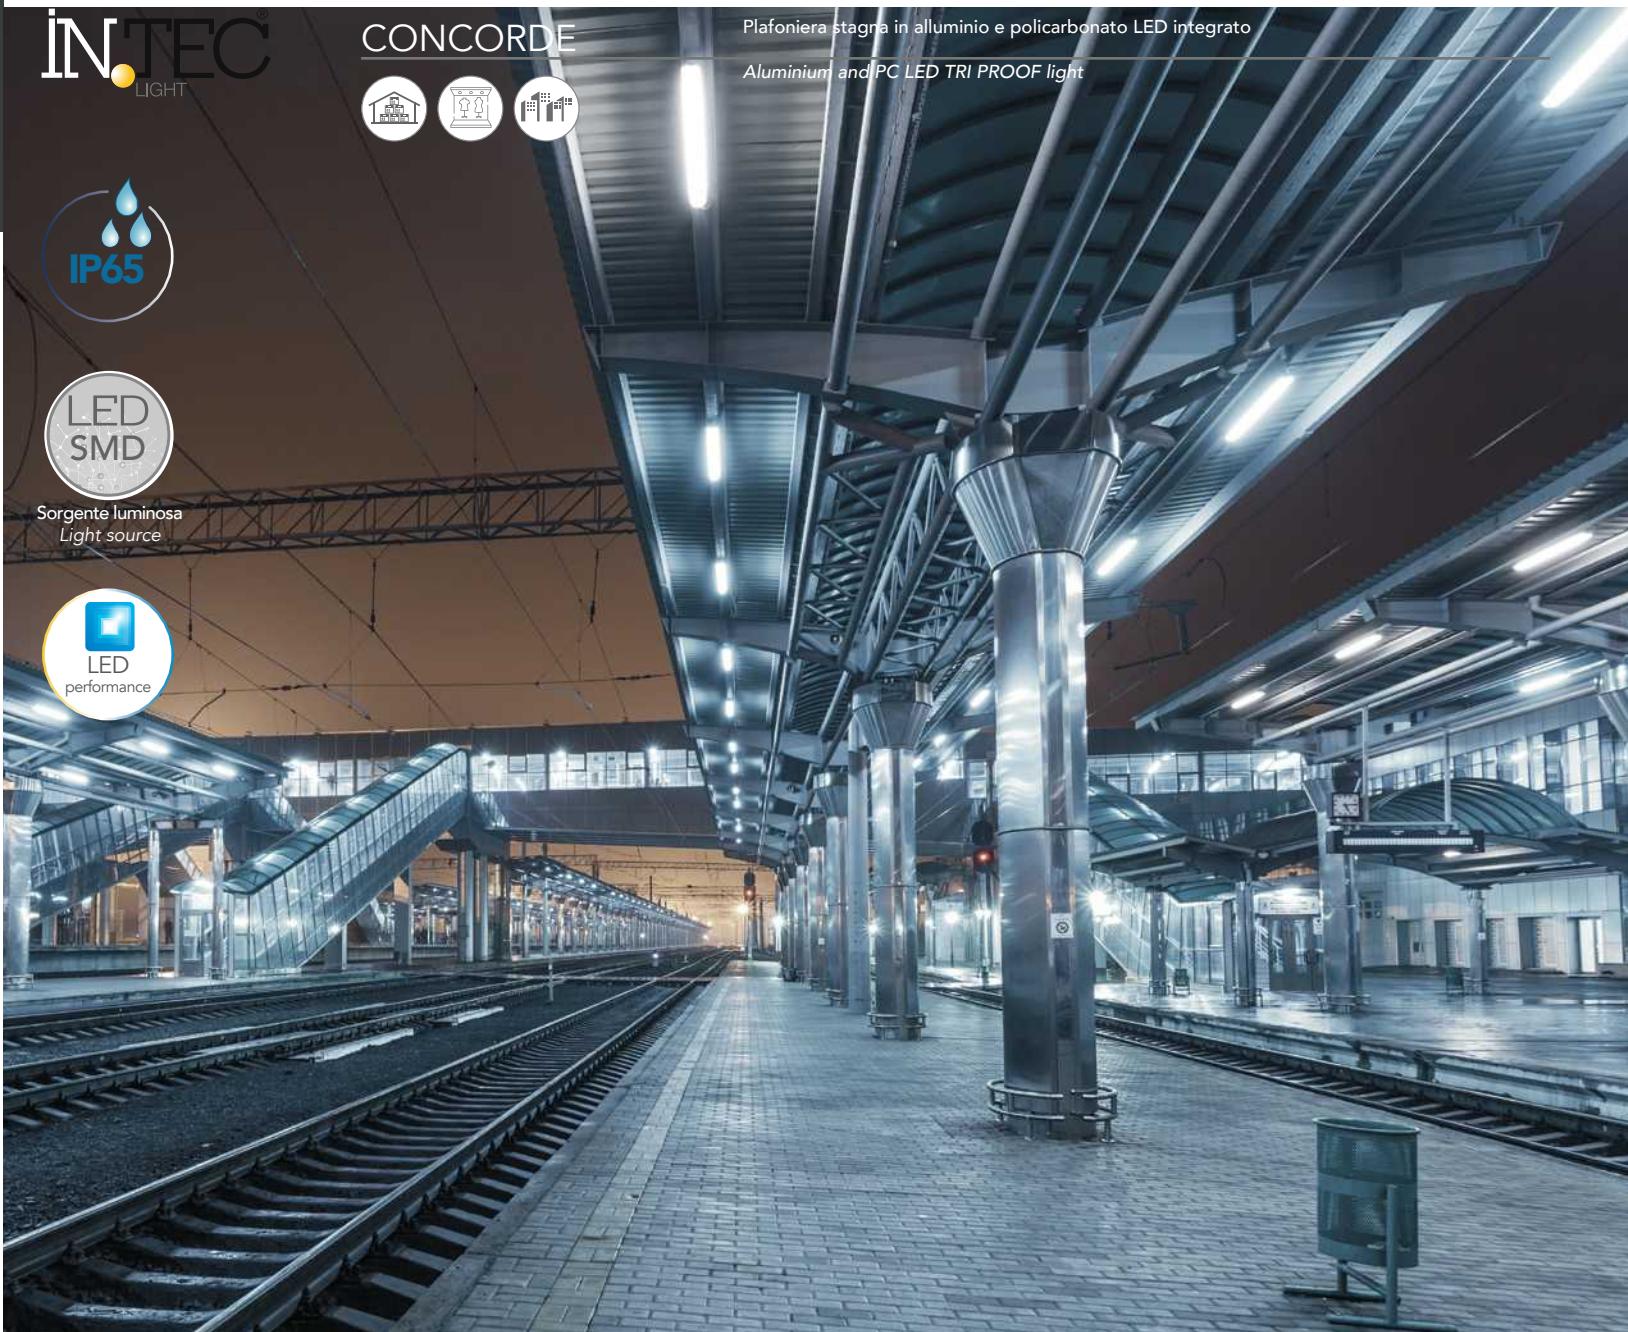Sorgente luminosa
Light source**Materiale**

Policarbonato

Colore

Bianco

Sorgente luminosa

LED SMD 30W - 60W - 75W

Flusso luminoso

3900 Lm - 7800 Lm - 9700 Lm

Driver

Integrato

Temperatura colore

4000K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK10

Material

Polycarbonate

Colour

White

Light source

LED SMD 30W - 60W - 75W

Luminous flux

3900 Lm - 7800 Lm - 9700 Lm

Driver

Built-in driver

Color temperature

4000K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle


120°

CRI

>80

IK degree

IK10

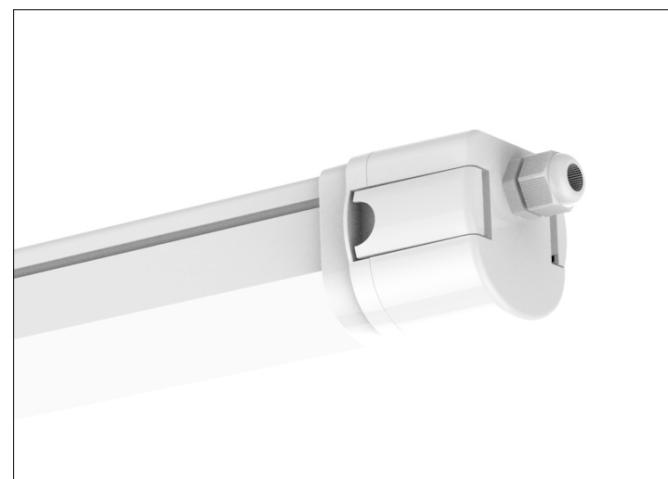


LED-CONCORDE-70
8031414868346 30W - 3900 LM PF 0,90

Misure - size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

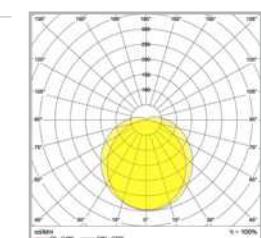


LED-CONCORDE-70




LED-CONCORDE-130
8031414066766 60W - 7800 LM PF 0,90

Misure - size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

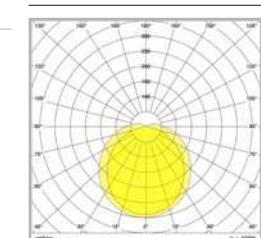


LED-CONCORDE-130




LED-CONCORDE-160
8031414868353 75W - 9700 LM PF 0,90

Misure - size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO
PHOTOMETRIC CURVE
OF PRODUCT

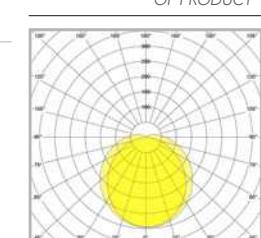

LED-CONCORDE-160

OCEAN

Plafoniera stagna LED integrato in policarbonato

Built-in LED TRI-PROOF ceiling lamps in PC

Sorgente luminosa
Light source**Materiale**

Policarbonato

Colore

Bianco

Sorgente luminosa

LED SMD 9W - 18W - 36W - 45W

Flusso luminoso

765 Lm - 1530 Lm - 3060 Lm - 3820 Lm - 3240 Lm

Driver

Integrato

Temperatura colore

4000K

Durata e on/off25.000 h >15.000 on/off OCEAN
30.000 h >15.000 on/off OCEAN SENS**Angolo di luce**

120°

CRI

>80

Grado IK

IK07

Material

Polycarbonate

Colour

White

Light source

LED SMD 9W - 18W - 36W - 45W

Luminous flux

765 Lm - 1530 Lm - 3060 Lm - 3820 Lm - 3240 Lm

Driver

Built-in

Color temperature

4000K

Lifetime and on/off25.000 h >15.000 on/off OCEAN
30.000 h >15.000 on/off OCEAN SENS**Beam angle**


120°

CRI


>80

IK degree


IK07

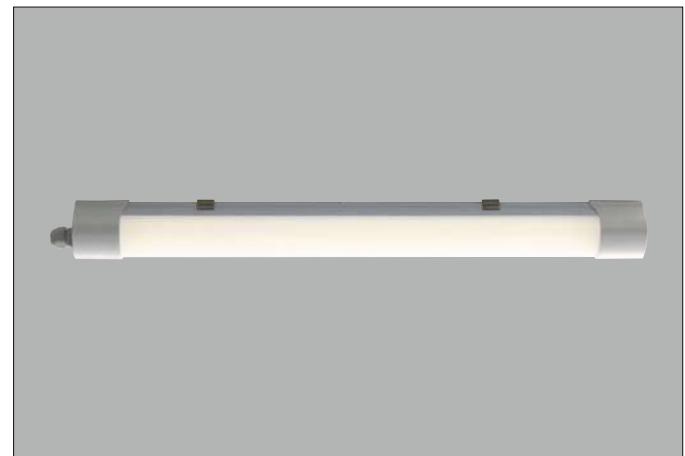STAFFE INCLUSE
BRACKET INCLUDEDLED-OCEAN-30
8031440357760 9W - 765 LMLED-OCEAN-60
8031440357777 18W - 1620 LMLED-OCEAN-120
8031440357784 36W - 3060 LM PF 0,90LED-OCEAN-150
8031440357791 45W - 3820 LM PF 0,90Misure - size
dimensioni in mm -
size mmAC230V
MULTI-CONNECTLED-OCEAN-SENS
8031414868858 36W - 3240 LM PF 0,90Misure - size
dimensioni in mm -
size mmcon sensore microonde di movimento
with microwave motion sensor

crepuscular sensor

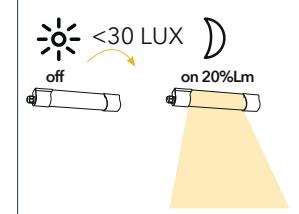


motion sensor

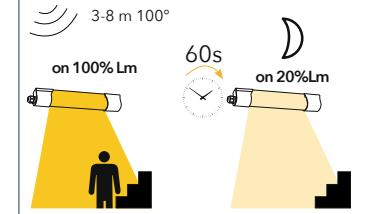


FOTOMETRIA DEL PRODOTTO


PHOTOMETRIC CURVE OF PRODUCT




LED-OCEAN-30




LED-OCEAN-60



LED-OCEAN-120



LED-OCEAN-150



LED-OCEAN-SENS

Lampada LED high bay in alluminio silver
Aluminium linear high bay LED lamp Silver finish



Sorgente luminosa
Light source


Materiale

Alluminio silver

Colore

Silver

Sorgente luminosa

LED SMD 100W - 150W - 200W

Flusso luminoso

15000 Lm - 22500 Lm - 30000 Lm

Driver

Incluso

Temperatura colore

4000K

Durata e on/off

50.000 h >25.000 on/off

Angolo di luce

120°

CRI

>80

Grado IK

IK10

Material

Aluminium silver

Colour

Silver

Light source

LED SMD 100W - 150W - 200W

Luminous flux

15000 Lm - 22500 Lm - 30000 Lm

Driver

Included

Color temperature

4000K

Lifetime and on/off

50.000 h >25.000 on/off

Beam angle

120°

CRI

>80

IK degree

IK10

CLASSE A+ CE EMC



LED-SUPERIA-100
8031414868315 100W - 15000 LM PF 0,90

LED-SUPERIA-150
8031414868865 150W - 22500 LM PF 0,90

LED-SUPERIA-200
8031414868322 200W - 30000 LM PF 0,90

Misure - size
dimensioni in mm -
size mm
605-905-1205 135 72

ACCESSORI INCLUSI
CABLE 1m INCL



LED-SUPERIA-PL
8031414870899 KIT 2pz ORIENTABILE 60°±


Kit 2 pz cavi sospensione
5m fissaggio

LED-SUPERIA-SOSP
8031414871803 Kit 2 pz cavi sospensione
5m fissaggio


I-DRIVER-SUPERIA-HELP
803141486339 Emergency pack IP20 20W
for 3 hours

Emergency pack IP20 20W
for 3 hours


FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT



LED-SUPERIA-100



LED-SUPERIA-150

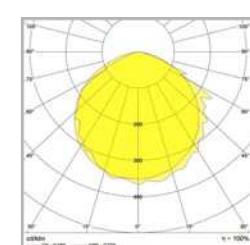

LED-SUPERIA-200

EASY DOMOTICA 24V

Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica.

Questa sezione raggruppa diverse tipologie di prodotti 24V (ad esempio indoor e outdoor) che, grazie all'utilizzo di accessori easy connector, possono essere connessi tra di loro per il controllo simultaneo.

Il controllo dei dispositivi diventa easy: la connessione ad alimentatori a tensione costante in parallelo è compatibile con centraline di controllo in Radio Frequenza 2,4G, Infrarossi, Wifi o Bluetooth e le centraline, a loro volta, prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.



CAVO-4CH-CONN-MF
8031414878772



CAVO-4CH-CONN-T
8031414878789



CAVO-4CH-CONN-M
8031414878796

100 cm Cavo di connessione connettore M+F
100 cm Connection cable M+F connector

40+20cm Cavo di connessione a T connettore M+F+F
40+20cm T connection cable M+F+F connector

50 cm Cavo di connessione connettore M+cavi sciolti
50 cm Connection cable M+cables

XANTO-RF

Incasso in alluminio pressofuso antiriflesso

Diecast aluminium anti-glare down-light

Materiale

Alluminio pressofuso

Material

Die cast aluminium

Colore

Bianco

Colour

White

Sorgente luminosa

LED SMD 12W - 30W

Light source

LED SMD 12W - 30W

Driver

DC 24V non incluso

Tensione costante connessione in parallelo

Driver

DC 24V not included

Constant voltage parallel connecting system

Temperatura colore

RGB + 4000K

Color temperature

RGB + 4000K

Flusso

846 Lm- 2088 Lm

Luminous flux

846 Lm- 2088 Lm

Durata e on/off

25.000 h ~ >15.000 on/off

Durability and on/off

25.000 h ~ >15.000 on/off

Angolo di luce

120°

Light angle

120°

CRI

>80

CRI

>80



INC-XANTO-R120-24V
8031414877942


12W 846LM

INC-XANTO-R220-24V
8031414878697

30W 2088LM
PF 0,90

FOTOMETRIA DEL PRODOTTO

PHOTOMETRIC CURVE OF PRODUCT

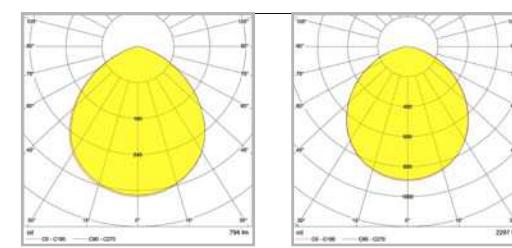

INC-XANTO-R120-24V INC-XANTO-R220-24V

Potenza - power

12W

30W



Foro - cut out

dimensioni in mm



Misure - Size

dimensioni in mm



PANEL



Pannello LED con struttura in alluminio
diffusore in acrilico

Materiale

Alluminio, diffusore in acrilico

Colore

Bianco

Sorgente luminosa

LED SMD 30W

Driver

DC24V tensione costante non incluso

Temperatura colore

RGB + 4000K

Punti luce

1

Flusso luminoso

2000 Lm

Durata e on/off

20.000h ~ >10.000 on/off

Angolo di luce

120°

CRI

>80

LED panel with aluminum structure
and acrylic diffuser

Material

Aluminium, acrylic diffuser

Colour

White

Light source

LED SMD 30W

Driver

DC24V constat voltage not included

Colour temperature

RGB + 4000K

Number of light sources

1

Luminous Flux

2000 Lm

Lifetime and on/off

20.000h ~ >10.000 on/off


Beam angle

120°

CRI

>80

STRIP

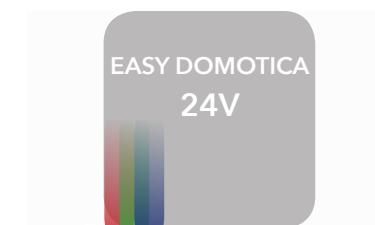

Rotolo strip LED 5 metri

5 meters roll strip LED

Materiale

Kapton senza silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

19,2W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

RGB + 4000K

Flusso luminoso

570Lm/m

Grado di protezione

IP20

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>80



W/m Lm/m LED/m

STRIP24V-5050-RGBW
8031414871384 19,2W 570 LM 60 LED

Misure - Size




Misura taglio
cut - size




LED-PANEL-60X60-24V
8031414875313 30W PF 0,90

Misure - size
dimensioni in mm - size mm

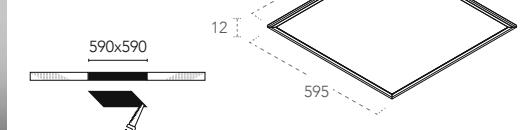

FOTOMETRIA DEL
PRODOTTO


PHOTOMETRIC CURVE
OF PRODUCT

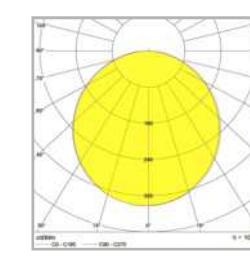

LED-PANEL-60X60-24V

FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

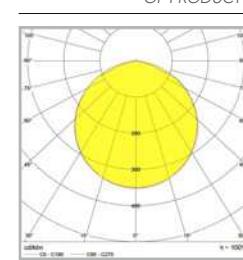

STRIP24V-5050-RGBW

STRIP



EASY DOMOTICA
24V



Rotolo strip LED 5 metri

5 meters roll strip LED

Materiale

Kapton con rivestimento in silicone

Sorgente luminosa

60xLED/m SMD 5050

Potenza

19,2W/m

Driver

DC24V tensione costante non incluso

Temperatura colore

RGB + 4000K

RGB + 4000K

Flusso luminoso

570Lm/m

Grado di protezione

IP68

Durata e on/off

50.000h ~ >25.000 on/off

CRI

>80

Material

Kapton with silicone cover

Light source

60xLED/m SMD 5050

Power

19,2W/m

Driver

DC24V constant voltage not included

Colour temperature

RGBW + 4000K

RGBW + 4000K

Luminous flux

570Lm/m

IP degree

IP68

Lifetime and on/off

50.000h ~ >25.000 on/off

CRI

>80

CLASSE A+ CE II

W/m Lm/m LED/m

STRIP24V-5050RGBW-IP68
8031414871407

19,2W 570LM 60 LED

Misure - Size




Misura taglio cut - size



FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

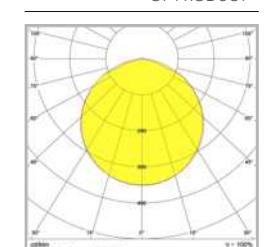

STRIP24V-5050RGBW-IP68

TARGET



EASY DOMOTICA
24V



Faro proiettore in alluminio
con picchetto incluso

Aluminium flood light with
spike included

Materiale

Alluminio

Colore

Nero

Sorgente luminosa

LED COB 8W - 30W

Driver

DC24V tensione costante non incluso

Temperatura colore

RGB + 4000K

RGB + 4000K

Flusso luminoso

340 - 840 Lm

Durata e on/off

30.000 h >15.000 on/off

Angolo di luce

30°

CRI

>80

Grado IK

IK10

Material

Aluminum

Colour

Black

Source light

LED COB 8W - 30W

Driver

DC24V constant voltage not included

Colour temperature

RGB + 4000K

RGB + 4000K

Luminous flux

340 - 840 Lm

Lifetime and on/off

30.000 h >15.000 on/off

Beam angle

30°

CRI

>80

IK degree

IK10


CLASSE A+ CE III

LED-TARGET-8-24V
8031414878604

8W - 340 Lm




Misure - size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

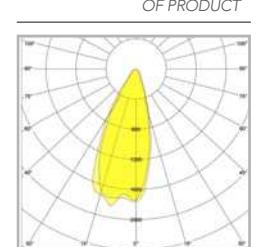


LED-TARGET-30-24V
8031414878550

30W - 840 LM




Misure - size
dimensioni in mm - size mm



FOTOMETRIA DEL
PRODOTTO

PHOTOMETRIC CURVE
OF PRODUCT

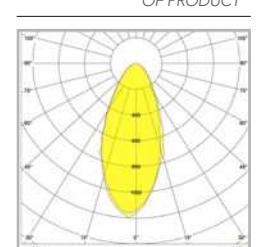

EASY DOMOTICA 24V

SPRINT



Segnapassi incasso a pavimento o parete

Inground and wall recessed light

Materiale

Alluminio

Colore

Acciaio

Sorgente luminosa

LED 1,5W

Driver

DC 24V tensione costante non incluso

Temperatura colore



Flusso luminoso

29 Lm

Durata e on/off

25.000 h ~ >10.000 on/off

Angolo di luce

108°

CRI

>80

Grado IK

IK08

Material

Aluminium

Colour

Stainless steel color

Light source

LED 1,5W

Driver

DC 24V constant voltage not included

Colour temperature



Luminous flux

29 Lm

Lifetime and on/off

25.000 h ~ >10.000 on/off

Beam angle

108°

CRI

>80

IK degree

IK08

RUNNER



Segnapassi incasso a pavimento o parete

Inground and wall recessed light

Materiale

Alluminio

Colore

Finitura nickel

Sorgente luminosa

LED 10W

Driver

DC 24V tensione costante non incluso

Temperatura colore



Luminous flux

390 Lm

Durata e on/off

30.000 h ~ >15.000 on/off

Angolo di luce

30°

CRI

>80

IK degree

IK10

Material

Aluminium

Colour

Nickel finish

Light source

LED 10W

Driver

DC 24V constant voltage not included

Colour temperature



Luminous flux

390 Lm

Life time and on/off


30.000 h ~ >15.000 on/off




LED-SPRINT-R5-24V
8031414878543

1,5W

Misure - size
dimensioni in mm - size mm

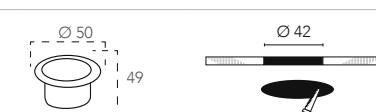

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT




Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box

Connessione in parallelo
parallel connection



FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

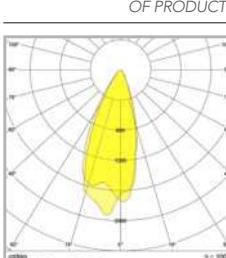


LED-RUNNER-Q8-24V

LED-RUNNER-Q8-24V
8031414878536

10W


Misure - size
dimensioni in mm - size mm

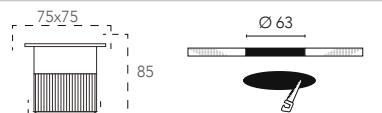

Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box

FOTOMETRIA DEL PRODOTTO
PHOTOMETRIC CURVE OF PRODUCT

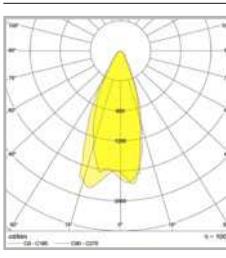


LED-RUNNER-R8-24V

LED-RUNNER-R8-24V
8031414878567

10W

Misure - size
dimensioni in mm - size mm

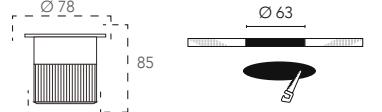

Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box

Connessione in parallelo
parallel connection

Proiettore LED RGB full color in alluminio

LED RGB full color lamp in aluminium


Materiale

Alluminio

Sorgente luminosa

LED 30x1W - 36x1W - 72x2W

Driver

incluso

Temperatura colore

RGB full color


Angolo di luce

45°

Grado di protezione

IP65

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Grado IK

IK10

Material

Aluminium

Light source

LED 30x1W - 36x1W - 72x2W

Driver

included

Color temperature

RGB full color


Beam angle

45°

IP degree

IP65

Lifetime and on/off

50.000h >25.000 on/off

CRI



>80

IK degree



IK10


 LED-RAYS-30P
8031440358071




30X1W

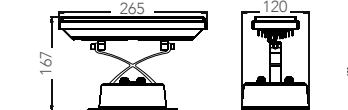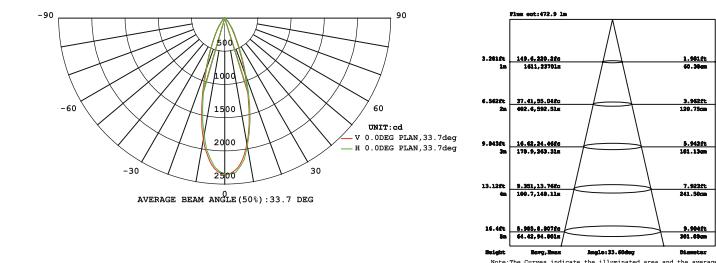
 Misure - size
dimensioni in mm -
size mm

 LED-RAYS-36P
8031440355445

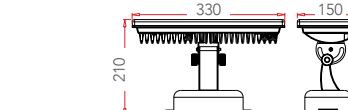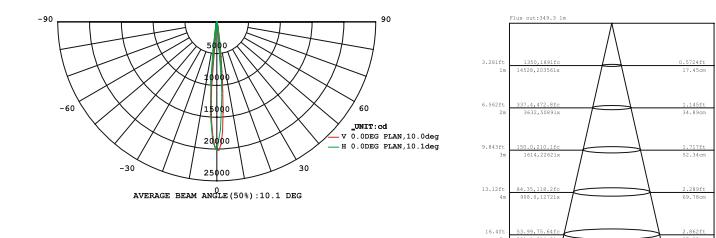
36X1W


 Misure - size
dimensioni in mm -
size mm

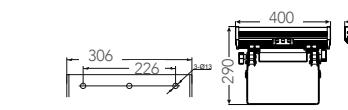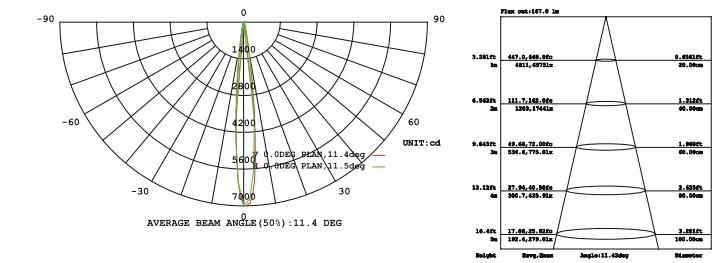 LED-RAYS-72P
8031440358040


72X2W


 Misure - size
dimensioni in mm -
size mm


WALLWASHER

Proiettore LED RGB full color in alluminio

LED RGB full color lamp in aluminium

Materiale

Alluminio

Sorgente luminosa

LED 18x2W - 36x2W

Driver

integrato

Temperatura colore

RGB full color



Angolo di luce

45°

Grado di protezione

IP65

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Grado IK

IK10

Material

Aluminium

Light source

LED 18x2W - 36x2W

Driver

built-in

Color temperature

RGB full color



Beam angle

45°

IP degree

IP65

Lifetime and on/off

50.000h >25.000 on/off

CRI

>80

IK degree

IK10



IP65

IP65



Dimming



WALLWASHER




LED-WALLWASHER-18
8031440359559



18X2W

Misure - size
dimensioni in mm -
size mm



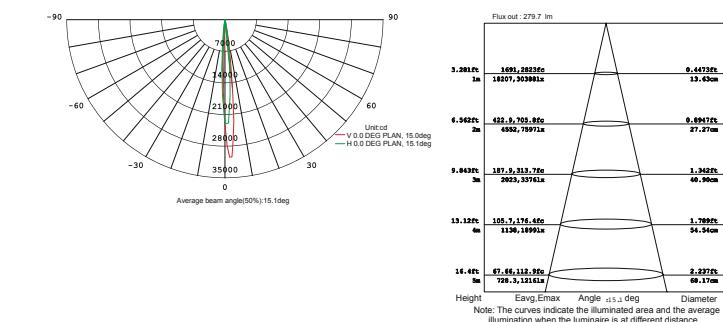


LED-WALLWASHER-36
8031440359528



36X2W

Misure - size
dimensioni in mm -
size mm

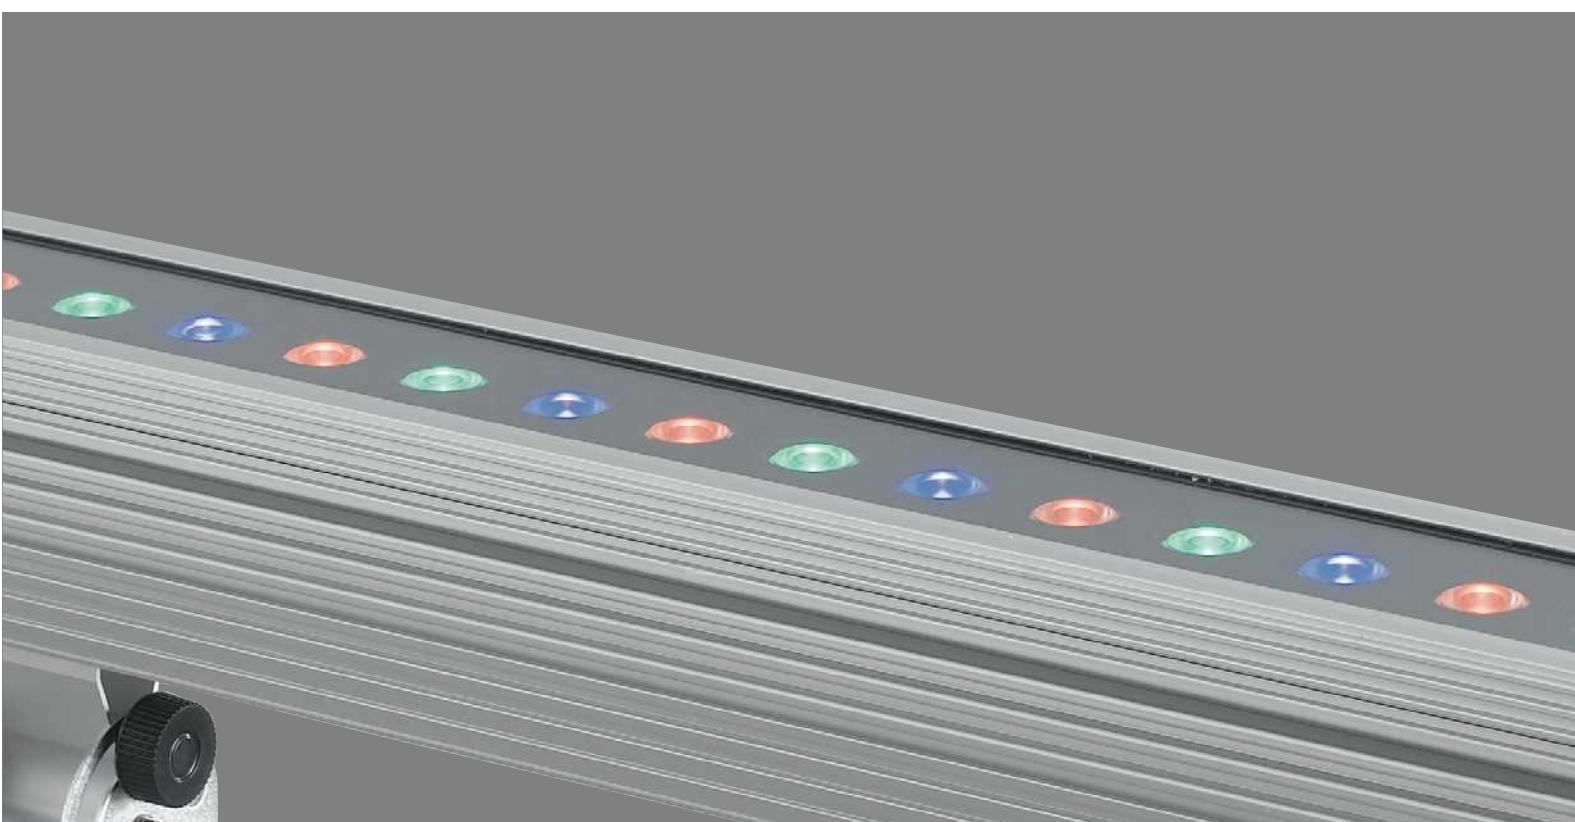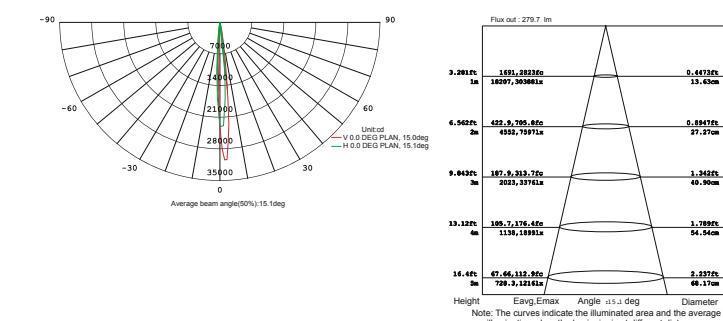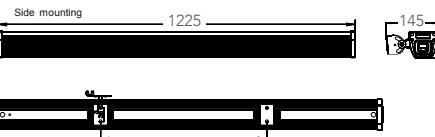

Proiettore LED monocolor o
RGB FULL COLOR in alluminio

LED single colour or RGB full
color lamp in aluminium

Materiale

Alluminio

Material

Aluminium

Sorgente luminosa

LED 3x1W - 9x1W - 18x1W

Light source

LED 3x1W - 9x1W - 18x1W

Driver

DC 12/24V non incluso

Driver

DC 12/24V not included

Temperatura colore

RGB full color 6000K

Color temperature

RGB full color 6000K

RGB

RGB

Angolo di luce

45° - 30° - 40°

Beam angle

45° - 30° - 40°

Grado di protezione

IP65

IP degree

IP65

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Grado IK


IK10

IK degree

IK10




CLASSE A
III
CE
EMC

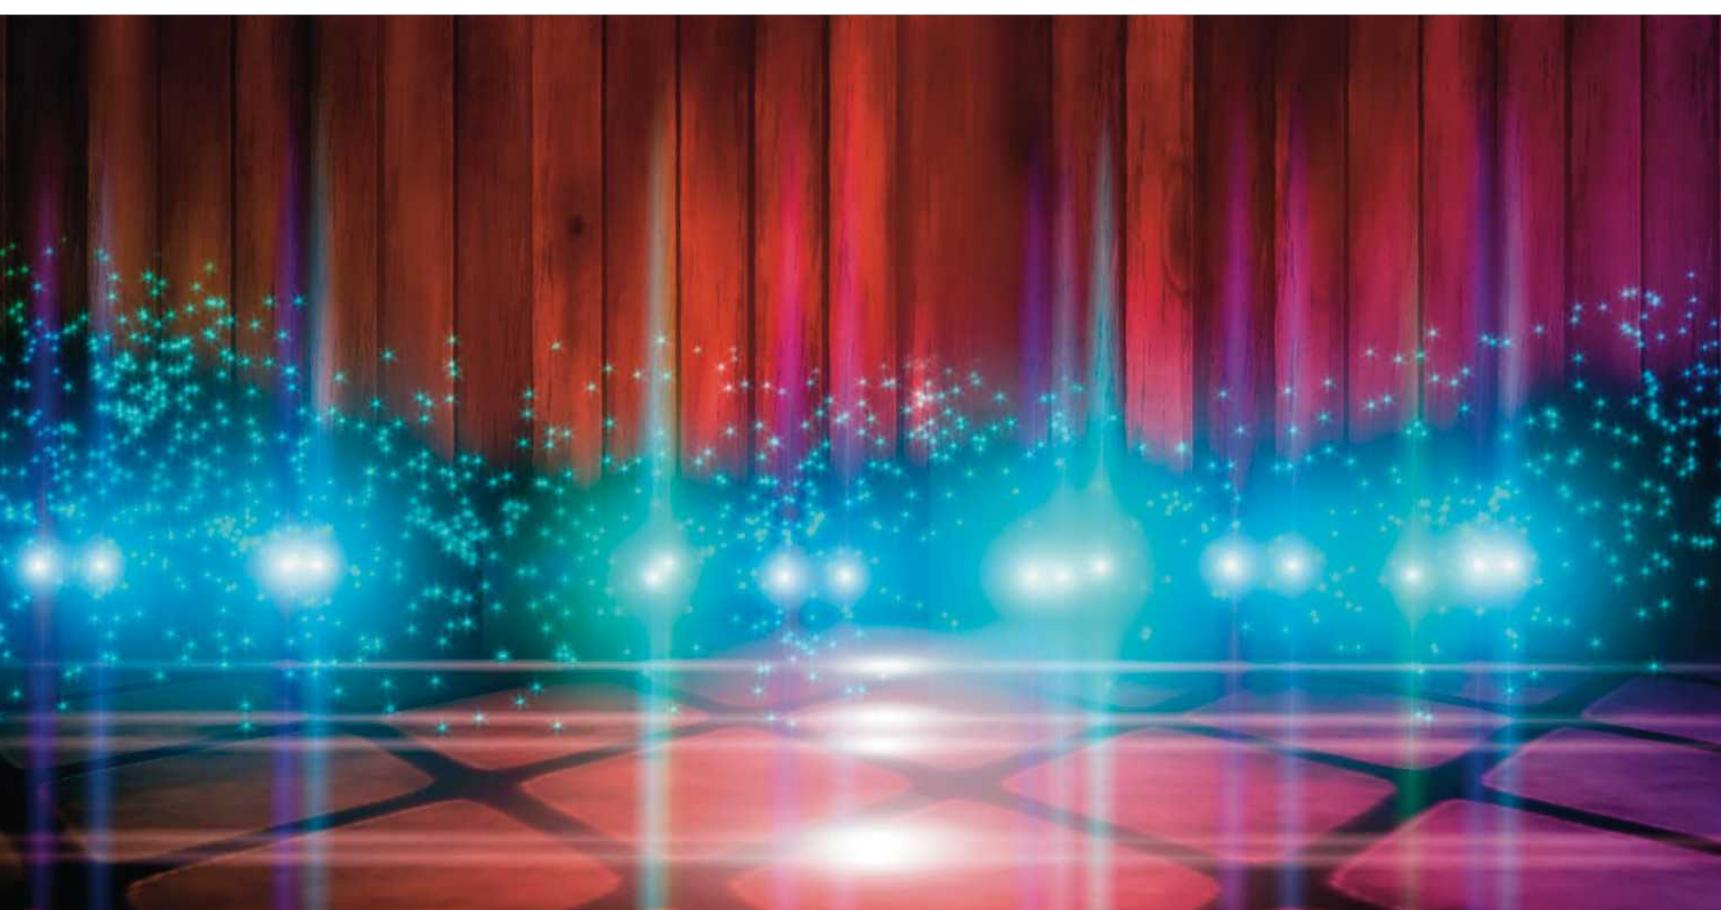

LED-IRIDE-3P 8031440358101	RGB	3X1W	45°	DC12/24V
-------------------------------	-----	------	-----	----------

LED-IRIDE-3P-BCO 8031440359719		3X1W	240 LM	30°	DC12/24V
-----------------------------------	--	------	--------	-----	----------


Misure - size
dimensioni in mm -
size mm

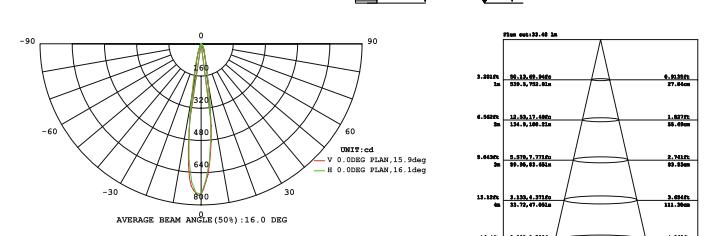

LED-IRIDE-9P 8031440358118	RGB	9X1W	40°	DC12/24V
-------------------------------	-----	------	-----	----------

LED-IRIDE-9P-BCO 8031440359702		9X1W	720 LM	30°	DC12/24V
-----------------------------------	--	------	--------	-----	----------


Misure - size
dimensioni in mm -
size mm

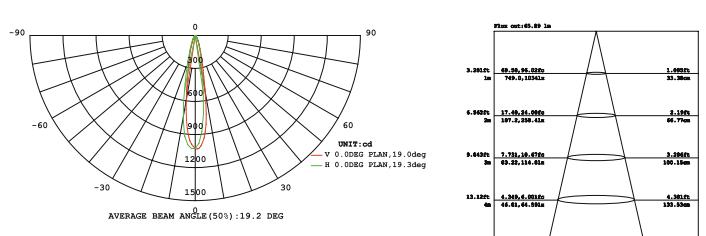

LED-IRIDE-18P 8031440358088	RGB	18X1W	40°	DC24V
--------------------------------	-----	-------	-----	-------

LED-IRIDE-18P-BCO 8031440359689		18X1W	1620 LM	30°	DC24V
------------------------------------	--	-------	---------	-----	-------

Misure - size
dimensioni in mm -
size mm

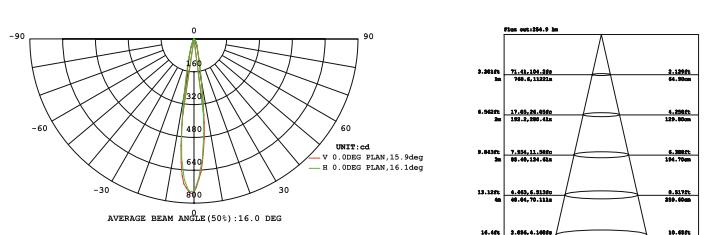



Incassi calpestabili LED RGB FULL COLOR
corpo in lega di alluminio, ghiera in acciaio 316

Materiale

Alluminio pressofuso

Sorgente luminosa

LED 3x1W - 9x1W - 18x1W

Driver

DC 12/24V non incluso

Temperatura colore

RGB full color



Angolo di luce

15°

Grado di protezione

IP67

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Grado IK

IK10

Walkable built-in LED RGB FULL COLOR light 316
stainless steel cover and aluminium alloy housing

Material

Die cast aluminium

Light source

LED 3x1W - 9x1W - 18x1W

Driver

DC 12/24V not included

Color temperature

RGB full color



Beam angle

15°

IP degree

IP67

Lifetime and on/off

50.000h >25.000 on/off

CRI

>80

IK degree


IK10




LED-IRIDE-R6
8031414868971



3X1W DC12/24V




Misure - size
dimensioni in mm -
size mm

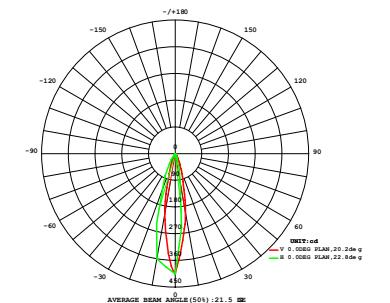


LED-IRIDE-R12
8031414868988



9X1W DC12/24V




Misure - size
dimensioni in mm -
size mm

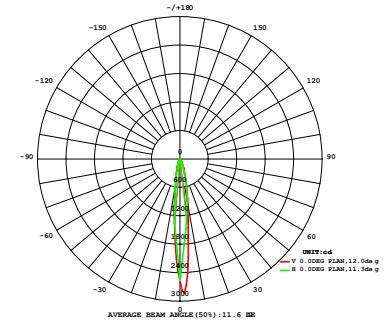


LED-IRIDE-R14
8031414868995



18X1W DC12/24V



Misure - size
dimensioni in mm -
size mm

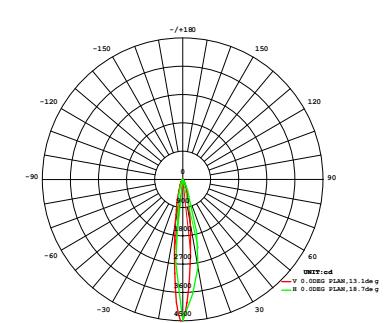

NEPTUNE



Proiettori LED IP68

Flood lamp LED IP68

Materiale

Acciaio inox 316

Colore

Finitura nero o silver

Sorgente luminosa

LED 36x1W - 3x3W

Driver

DC 24V non incluso

Temperatura colore

RGB full color



Angolo di luce

45° - 25°

Grado di protezione

IP68

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Grado IK

IK10

Material

316 stainless steel

Colour

Black or silver finish

Light source

LED 36x1W - 3x3W

Driver

DC 24V not included

Color temperature

RGB full color



Beam angle

45° - 25°

IP degree

IP68

Lifetime and on/off

50.000h >25.000 on/off


CRI

>80

IK degree

IK10

CROWN

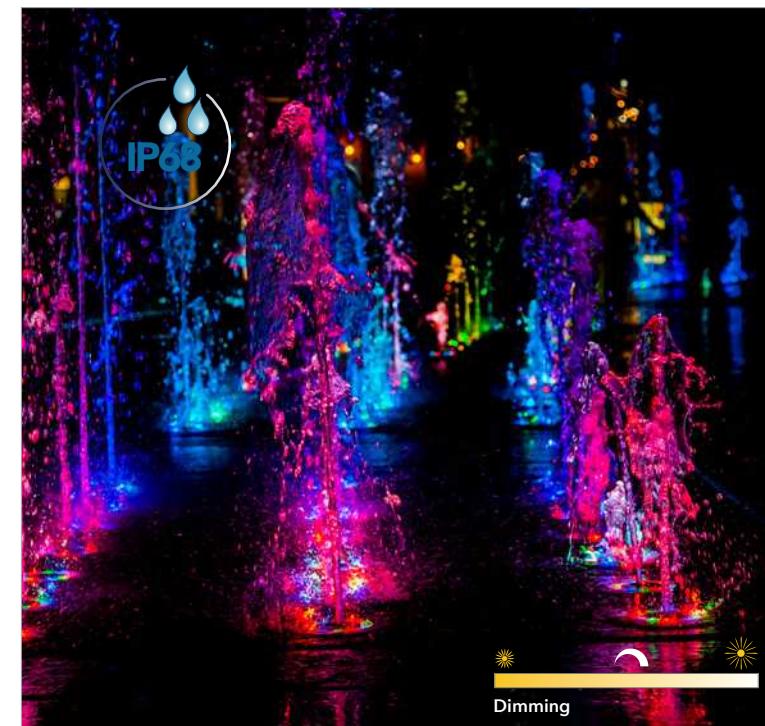

Incasso per fontane LED RGB full color

LED RGB full color fountain recess lamp

Materiale

Acciaio inox 316

Sorgente luminosa

LED 9x2W

Driver

DC 24V non incluso

Temperatura colore

RGB full color



Beam angle

25°

Grado di protezione

IP68

Durata e on/off

50.000h >25.000 on/off

CRI

>80

IK degree

IK10

Material

316 stainless steel

Light source

LED 9x2W

Driver

DC 24V not included

Color temperature

RGB full color



Beam angle

25°

IP degree

IP68

Lifetime and on/off

50.000h >25.000 on/off

CRI


>80

IK degree


IK10




LED-NEPTUNE-36P
8031440358057
RGB
36X1W
45°

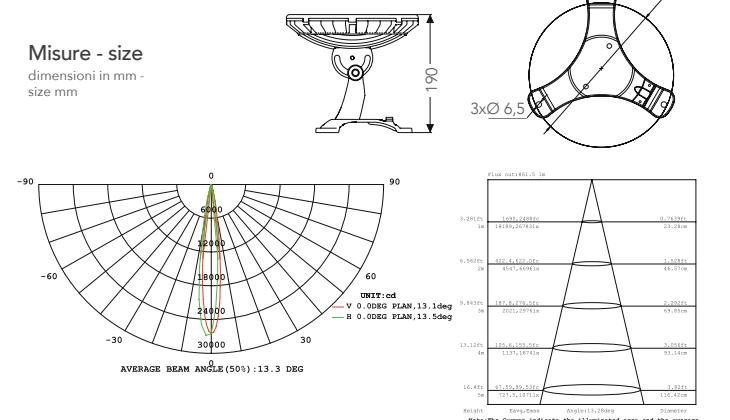

LED-NEPTUNE-3P
8031414869008
RGB
3X3W
25°

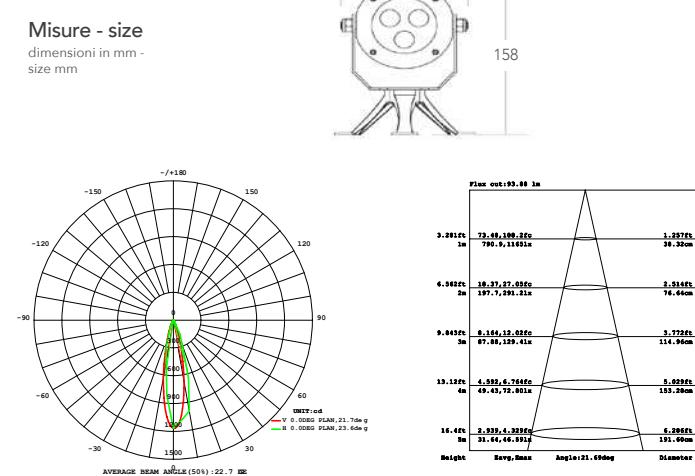

LED-CROWN-R14
8031414869015
RGB
9X2W

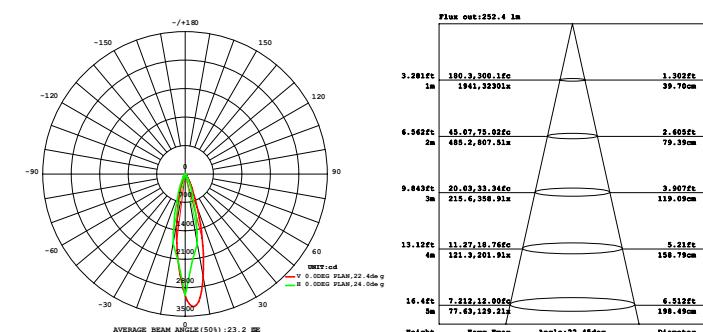

TREVIS

Incasso immersione LED RGB full color

Immersion recessed light LED RGB full color



Materiale

Acciaio inox 316

Sorgente luminosa

LED 9W - 3W

Driver

DC 24V non incluso

Temperatura colore

RGB full color



Angolo di luce

25°

Grado di protezione

IP68

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Grado IK

IK10

Material

316 stainless steel

Light source

LED 9W - 3W

Driver

DC 24V not included

Color temperature

RGB full color



Beam angle

25°

IP degree

IP68

Lifetime and on/off

50.000h >25.000 on/off

CRI

>80

IK degree

IK10

TREVIS





LED-TREVIS-R11
8031414869039



9W

Misure - size
dimensioni in mm -
size mm


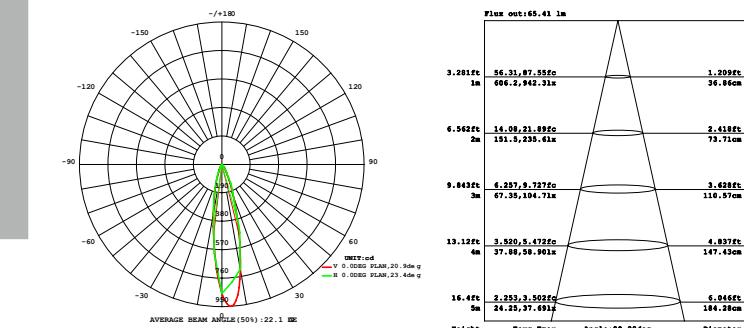
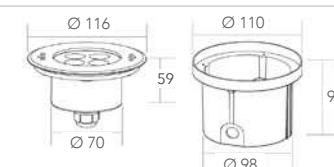


LED-TREVIS-R7
8031414869022




3W

Misure - size
dimensioni in mm -
size mm

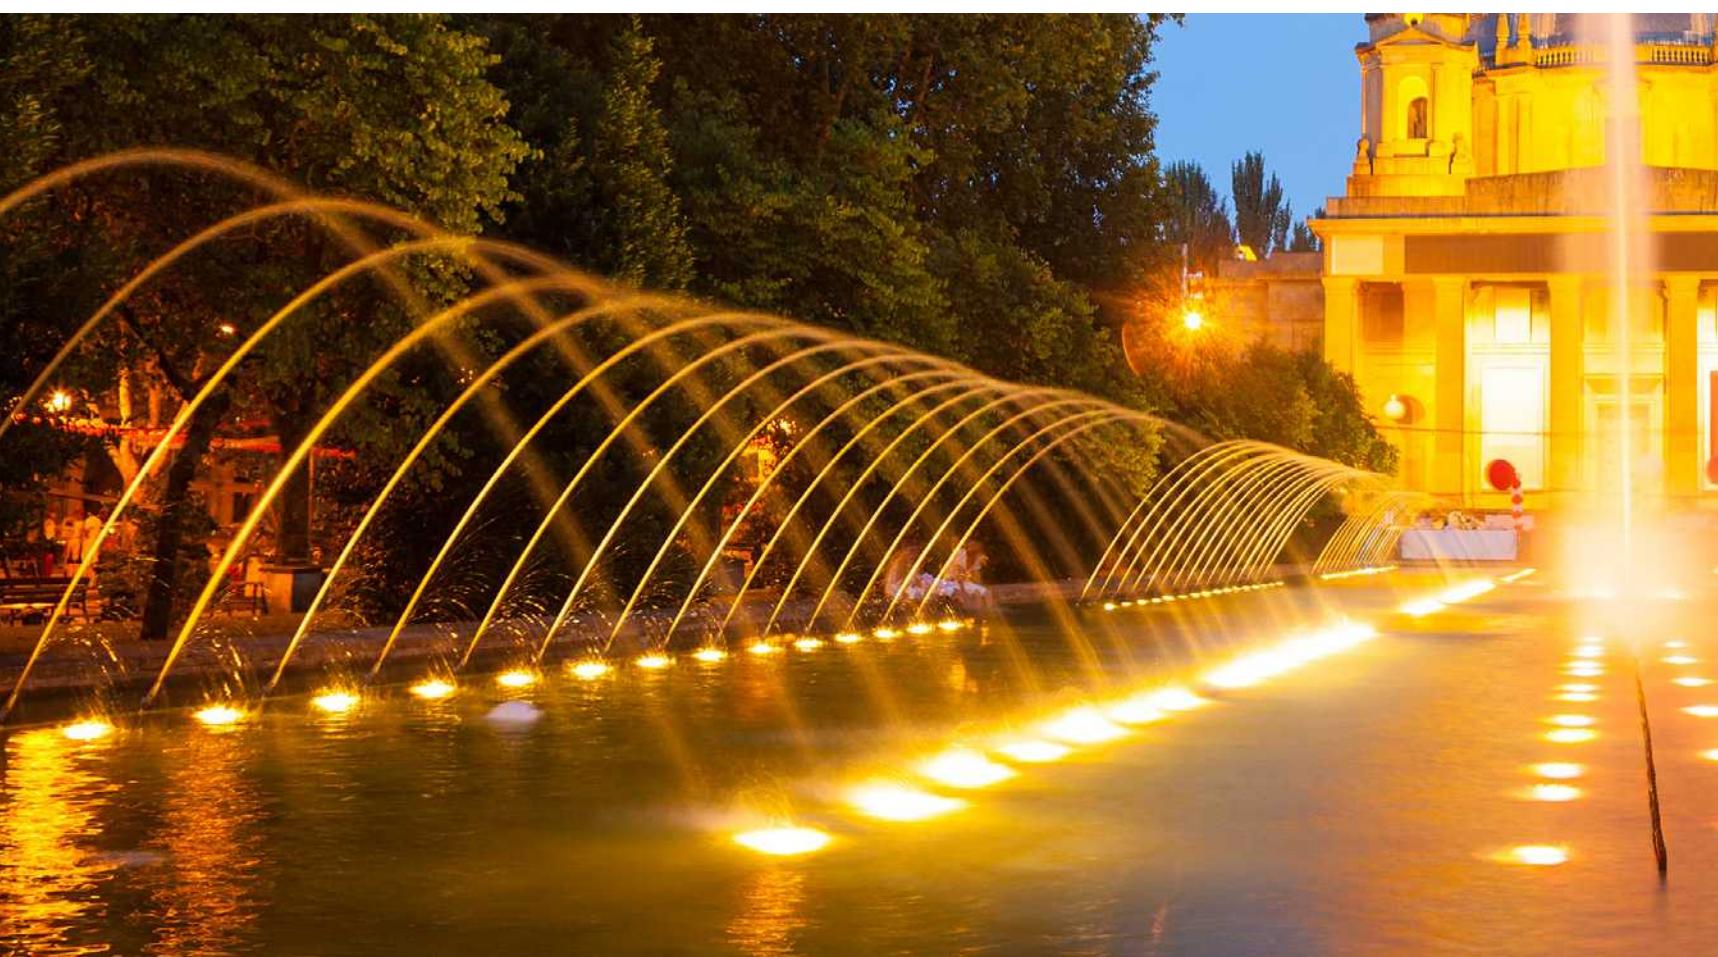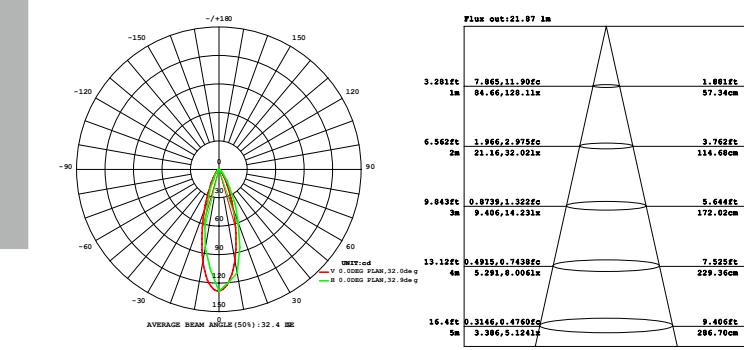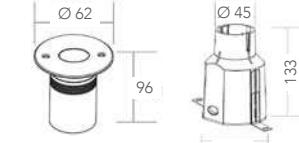

PAR56

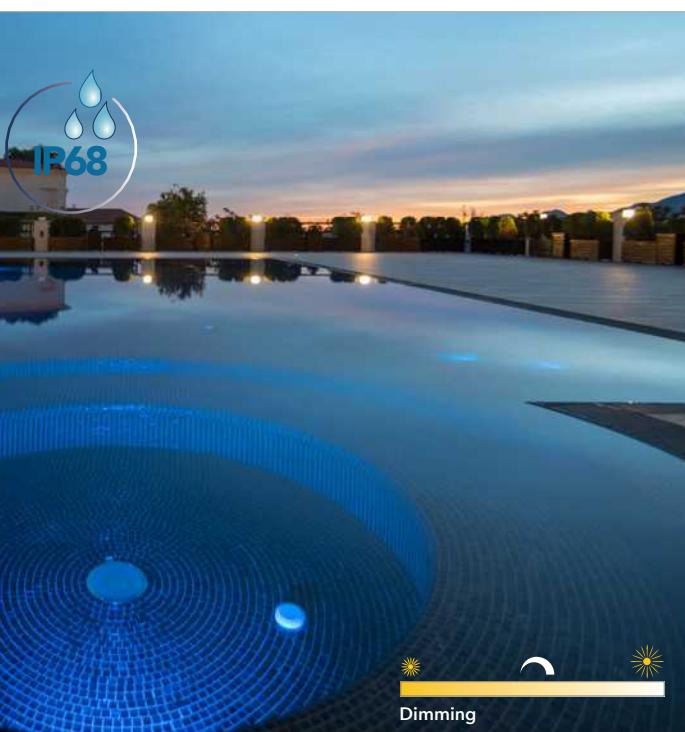

Lampada LED a immersione

Materiale

Policarbonato

Sorgente luminosa

LED 21W

Driver

AC 12V non incluso - DC 24V non incluso

Temperatura colore

RGB full color 5700K



Angolo di luce

45°

Grado di protezione

IP68

Durata e on/off

50.000h >25.000 on/off

CRI

>80

Grado IK

IK10

Immersion LED bulb-light

Material

PC Polycarbonate

Light source

LED 21W

Driver

AC 12V not included - DC 24V not included

Color temperature

RGB full color 5700K



Beam angle

45°

IP degree

IP68

Lifetime and on/off

50.000h >25.000 on/off


CRI

>80

IK degree

IK10

PELPS

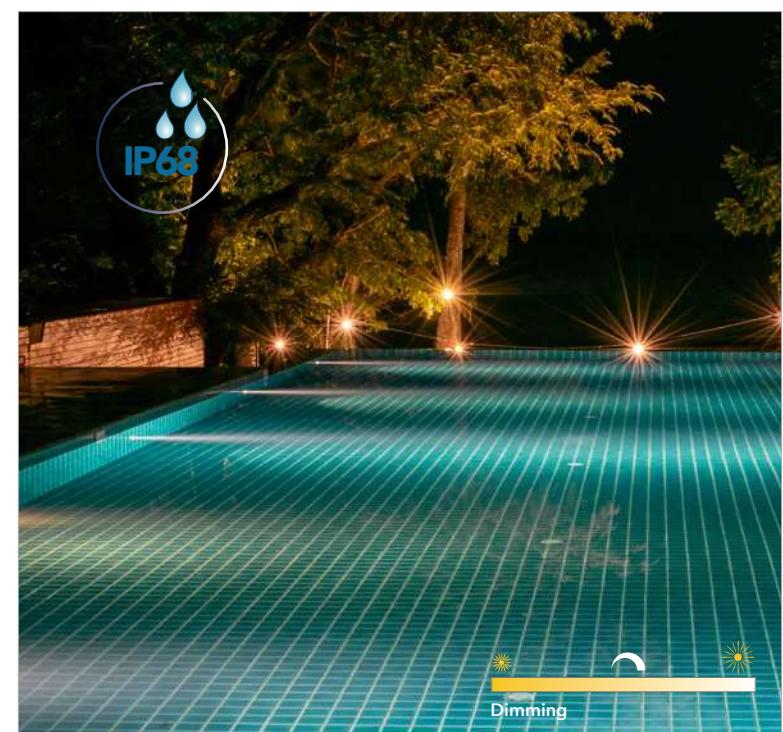

Incasso per piscine

Materiale

Policarbonato

Sorgente luminosa

LED 18W

Driver

AC 12V non incluso - DC 24V non incluso

Temperatura colore

RGB full color 5700K



Angolo di luce

45°

Grado di protezione

IP68

Durata e on/off

50.000h >25.000 on/off

CRI

>80

IK degree

IK10

Incasso per piscine

Material

PC Polycarbonate

Light source

LED 18W

Driver

AC 12V not included - DC 24V not included

Color temperature

RGB full color 5700K



Beam angle

45°

IP degree

IP68

Lifetime and on/off

50.000h >25.000 on/off

CRI

>80


IK degree

IK10




Misure - size

dimensioni in mm -
size mm

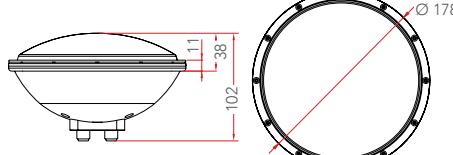

LED-PAR56-RGB 8031440359535		21W	AC12V
LED-PAR56-BCO 8031440359504		21W	1050 LM AC12V
LED-PAR56-24V-RGB 8031414879755		22W	cavo 100 cm incluso 100 cm cable include DC24V

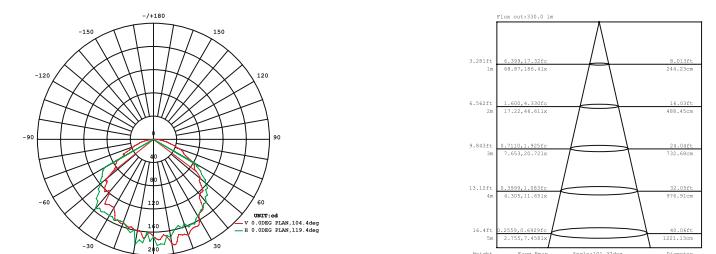


INC-POOL-PAR56
8031440359511



Struttura incasso per PAR 56 per piscine in cemento

Recessed structure for PAR56 for concrete swimming pool





Misure - size
dimensioni in mm -
size mm




CAVO INCLUSO CABLE INCLUDED

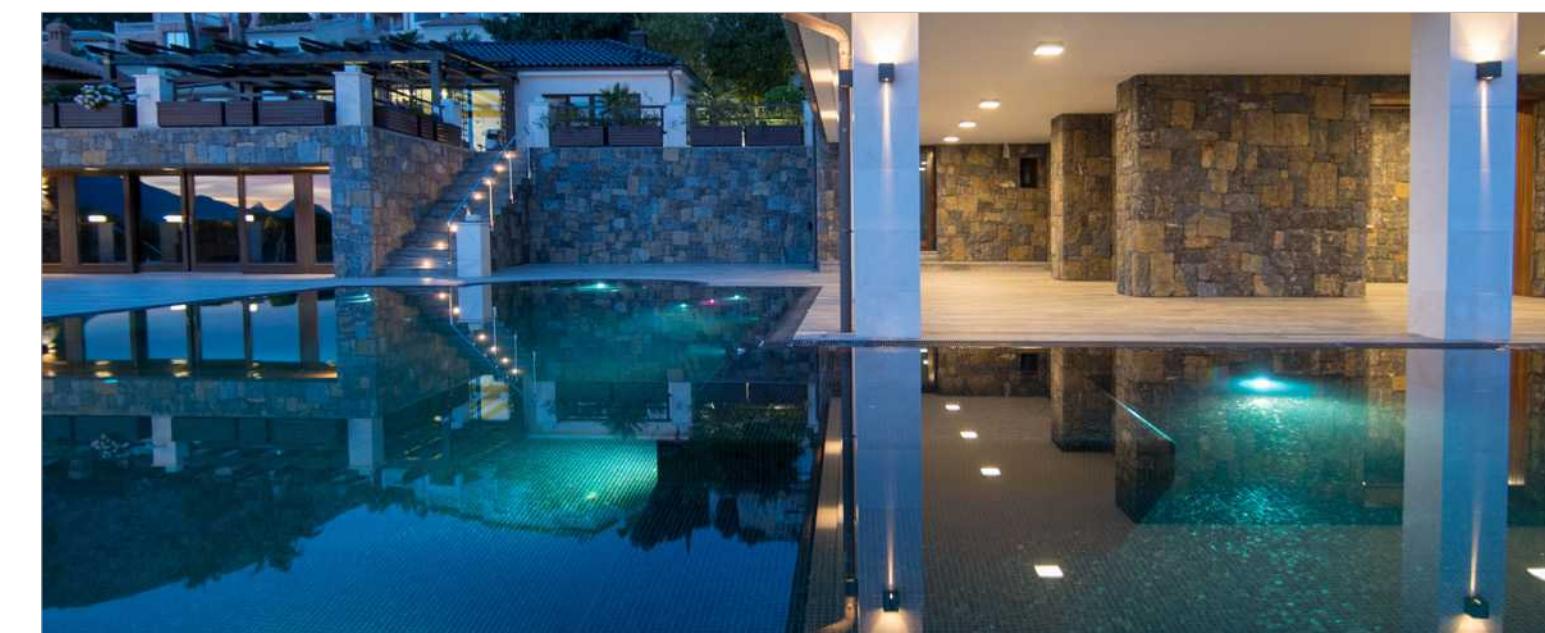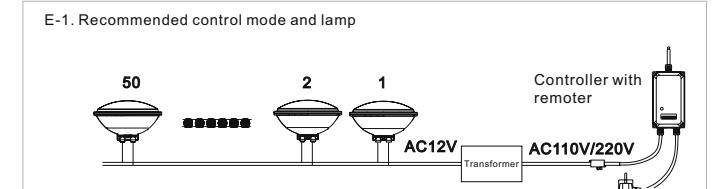



CONTROLLER

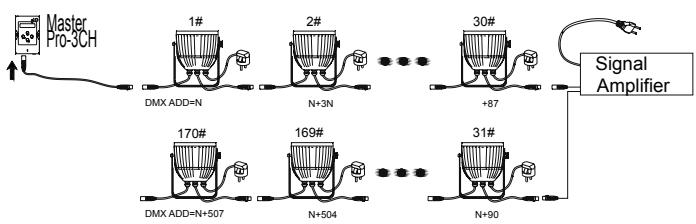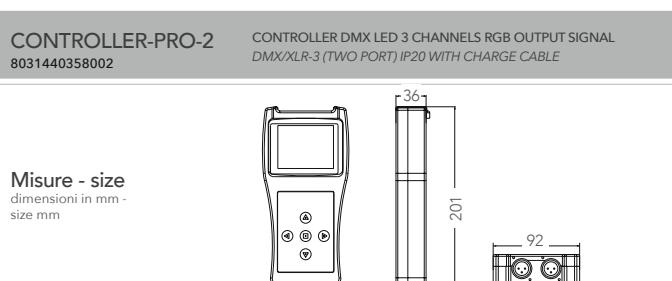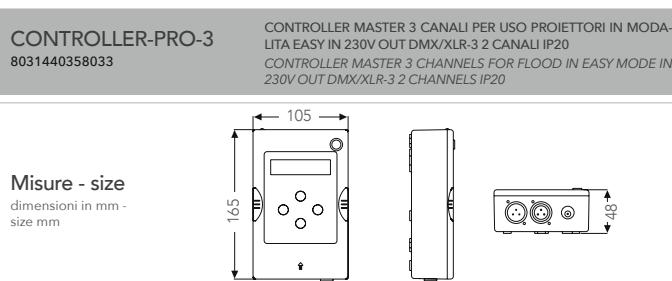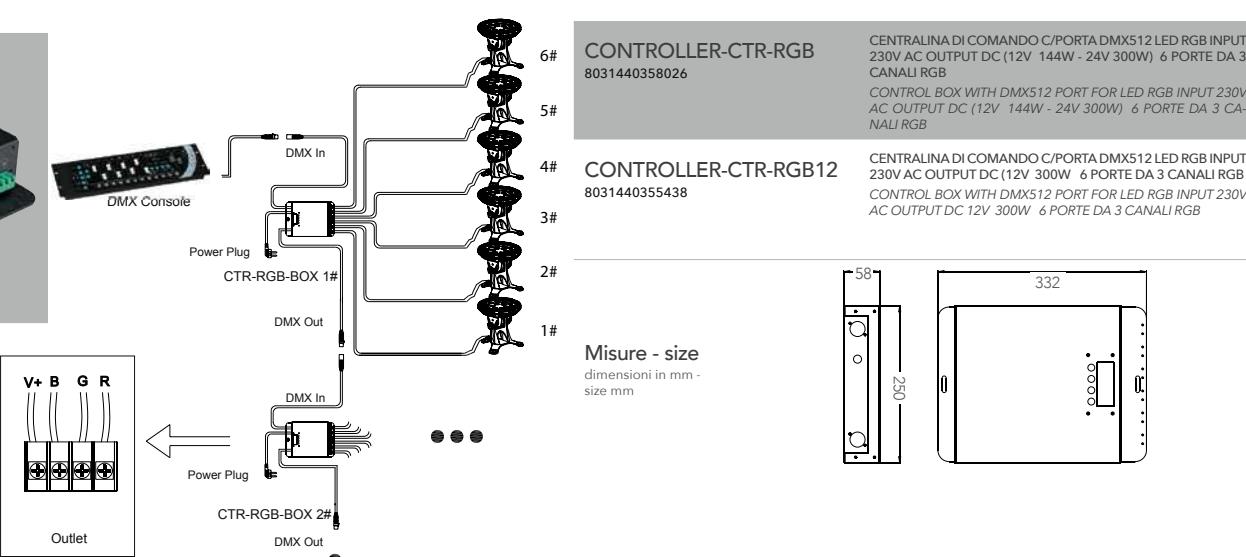

CONTROLLER-POOL
8031440359481
CONTROLLER 240V AC MAX 5A/1100W IP65 DISTANZA MAX 30M
CONTROLLER 240V AC MAX 5A/1100W IP65 MAX DISTANCE 30M

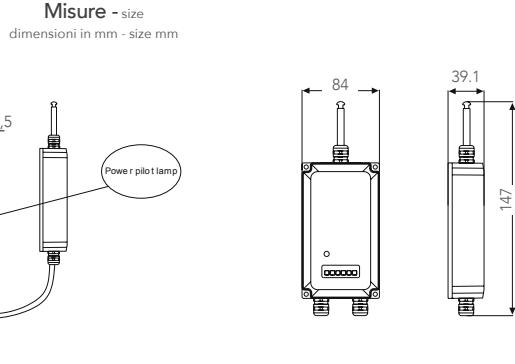

E-1. Recommended control mode and lamp

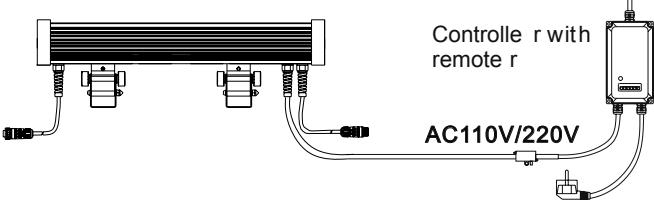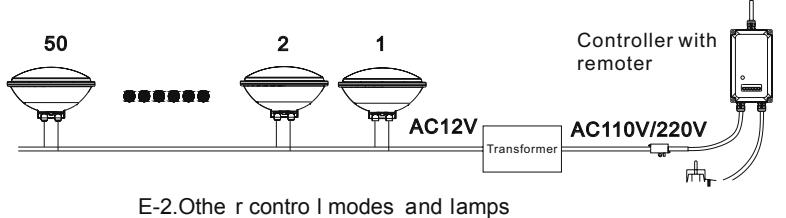


CONTROLLER-DMX-24
8031414872718
CONTROLLER DMX 24 CANALI TENSIONE COSTANTE 4A
INPUT VOLTAGE 12/24V DC OUTPUT POWER 24X(48-96)W OUTPUT CURRENT 24X4A
MISURE 264,5X83X42 MM
CONTROLLER DMX 24 CHANNELS CONSTANT VOLTAGE 4A INPUT VOLTAGE 12/24V DC OUTPUT POWER 24X(48-96)W OUTPUT CURRENT 24X4A
MISURE 264,5X83X42 MM

Misure - size
dimensioni in mm - size mm 264,5x83x42 mm



SPLITTER-DMX-4
8031440359542
SPLITTER DMX 6W XLR-3X4PCS XLR-5X4PCS

Misure - size
dimensioni in mm - size mm

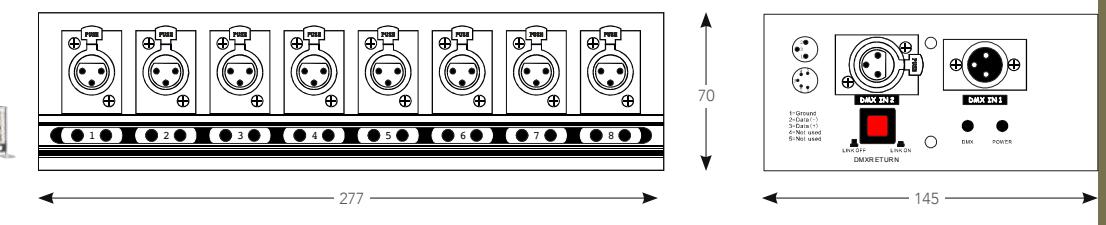

CONTROLLER




LED-SUNLITE-DE3
8031440359498
SUNLITE 2X512 DMX ESA PRO/SUITE 2




CONTROLLER



LED-SUNLITE-U9
8031440359467
SUNLITE CONTROLLER 256 CANALI INPUT
(218 STEPS MAX)
SUNLITE CONTROLLER 256 CHANNELS INPUT
(218 STEPS MAX)

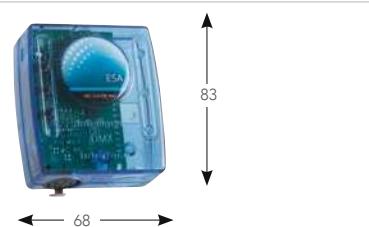

LED-SUNLITE-GU2
8031422251093
SUNLITE DMX STICK-GU2 128 CANALI INPUT 240V
SUNLITE DMX STICK-GU2 128 CHANNELS INPUT 240V

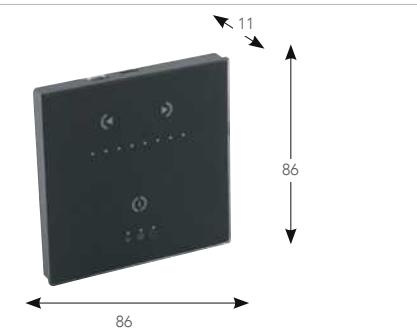

DRIVER - ACCESSORI



TRASFORMATORE-120
8031440355094

TRASFORMATORE DI TENSIONE 120W
INPUT 240V AC OUTPUT 12V AC IP44 10A
mis. 180x134x63 mm



LED-IRIDE-CAVO-2M-2P
8031440355452

CAVO 2 POLI X FARO IRIDE BIANCO ALLUMINIO IP65
2 m



LED-IRIDE-CAVO-2M
8031440358095

CAVO RGB 4 POLI X FARO IRIDE RGB ALLUMINIO IP65 BIANCO
2 m



CONNETTORE-M
8031440355469

CONNETTORE IP68
MASCHIO PER DMX



CONNETTORE-F
8031440355476

CONNETTORE IP68
FEMMINA PER DMX



CONNECTBOX-IP68-3
8031440358903

SCATOLA CONNESSIONE IP68 A TRE POLI
Misure 35x115x71 mm



CONNECTBOX-IP68-2
8031440358927

SCATOLA CONNESSIONE IP68 A DUE POLI
Misure 30x115x41 mm



GUAINA
8031440355483

GUAINA ISOLANTE IP65



DRIVER

ActEC



I-DRIVER/4W
8031414862801

MINI Driver corrente costante - Constant current driver
Output 2-12V 350mA 4W IP65
Input 100 ~ 240V

Misure - size
dimensioni in mm - size mm
38X27X21



I-DRIVER/4W-24V
8031414871797

MINI Driver tensione costante - Constant voltage driver
Output 24V DC 0.17A 4W IP65
Input 100 ~ 240V AC 50 ~ 60Hz

Misure - size
dimensioni in mm - size mm
38X27X21



I-DRIVER-LT-75-24
8031414876822

LT Driver tensione costante - Constant voltage driver
Output 24VDC 3.12A 75W
Input 220 ~ 240V AC

Misure - size
dimensioni in mm - size mm
305X30X17



I-DRIVER-LT-150-24
8031414876846

LT Driver tensione costante - Constant voltage driver
Output 24V DC 6.25A 150W
Input 220 ~ 240V AC

Misure - size
dimensioni in mm - size mm
336X30X17

DRIVER EMERGENZA



I-DRIVER-EMERGENCY
8031414864751

Driver Di Emergenza - Emergency driver
6-60V 400-40mA 4W 180Min
Battery 3,6V 3.0Ah Ni-Cd

Misure - size
dimensioni in mm - size mm
160X38X28



I-DRIVER-HELP
8031414862559

Driver Di Emergenza
Output Voltage 10-120V - Input Voltage 85-265V
3-40W.emergenza 120Min. 18650 Li-Ion Battery
3,7V 2.4Ah

Misure - size
dimensioni in mm - size mm
131X55X21

DIMMER

ActEC



I-DIMMER-D1-10
8031414877959

D1-10 dimmer
Dimming range 1%-100% 1-10V 40mA

Misure - size
dimensioni in mm - size mm
22,5X22,5X48,6

ALIMENTATORI



Alimentatori tensione costante LRS e RSP 12V - Costant voltage power supply LRS e RSP 12V



STRIP-DRIVER12V-35W
8031440360265

Output 12V 3A 36W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
99X82X30



STRIP-DRIVER12V-50W
8031414866779

Output 12V 4.2A 50W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
99X82X30



STRIP-DRIVER12V-75W
8031439581268

Output 12V 6A 72W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
99X97X30



STRIP-DRIVER12V-100W
8031440359368

Output 12V 8.5A 102W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
129X97X30



STRIP-DRIVER12V-150W
8031439611262

Output 12V 12.5A 150W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)
Misure - size
dimensioni in mm - size mm
159X97X30



STRIP-DRIVER12V-200W
8031440359375

Output 12V 16,7A 200W
Input 85 ~ 264VAC 124 ~ 370VDC
Misure - size
dimensioni in mm - size mm
215X115X30



STRIP-DRIVER12V-320W
8031440359344

Output 12V 26,7A 320W
Input 88 ~ 264VAC 124 ~ 370VDC
Misure - size
dimensioni in mm - size mm
215X115X30

ALIMENTATORI



Alimentatori tensione costante LRS e RSP 24V - Costant voltage power supply LRS e RSP 24V



STRIP-DRIVER24V-35W
8031414870943

Output 24V 1,5A 36W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
99X82X30



STRIP-DRIVER24V-50W
8031440364744

Output 24V 2,2A 52W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
99X82X30



STRIP-DRIVER24V-75W
8031414870950

Output 24V 3,2A 76W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
99X97X30



STRIP-DRIVER24V-100W
8031440364751

Output 24V 4,5A 108W
Input 85 ~ 264VAC 120 ~ 373VDC
Misure - size
dimensioni in mm - size mm
129X97X30



STRIP-DRIVER24V-150W
8031414870967

Output 24V 6,5A 156W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)
Misure - size
dimensioni in mm - size mm
159X97X30



STRIP-DRIVER24V-200W
8031440364737

Output 24V 8,4A 201W
Input 85 ~ 264VAC 124 ~ 370VDC
Misure - size
dimensioni in mm - size mm
215X115X30



STRIP-DRIVER24V-320W
8031414864959

Output 24V 13,4A 321W
Input 88 ~ 264VAC 124 ~ 370VDC
Misure - size
dimensioni in mm - size mm
215X115X30

ALIMENTATORI



Alimentatori tensione costante UHP 24V - Costant voltage power supply UHP 24V



I-DRIVER-UHP-350-24
8031414879618

Output 24V 14.6A 350W
Input 90 ~ 264VAC 127 ~ 370VDC
senza ventola - without fan

Misure - size
dimensioni in mm - size mm
220X62X31



I-DRIVER-UHP-500-24
8031414879625

Output 24V 20.9A 501W
Input 90 ~ 264VAC 127 ~ 370VDC
senza ventola - without fan

Misure - size
dimensioni in mm - size mm
232X81X31

ALIMENTATORI



Alimentatori tensione costante RSP 36V - Costant voltage power supply RSP 36V



STRIP-DRIVER36V-200W
8031414870974

Output 36V 5.56A 200W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30



STRIP-DRIVER36V-320W
8031414864829

Output 36V 8.9A 320W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30

ALIMENTATORI



Alimentatori tensione costante RSP 48V - Costant voltage power supply RSP 48V



STRIP-DRIVER48V-200W
8031414878307

Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30



STRIP-DRIVER48V-320W
8031414878314

Output 48V 6.7A 321W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30

DRIVER



Driver LPHC LPH e LCM



I-DRIVER/18W-24
8031414875351

LPH Output 24V 0.75A 18W IP67
Input 180 ~ 264VAC 254 ~ 370VDC



Misure - size
dimensioni in mm - size mm
140X30X22



I-DRIVER/18W
8031439571269

LPHC Output 6~48V 350mA 16,8W IP67
Input 180 ~ 264VAC



Misure - size
dimensioni in mm - size mm
140X30X22



I-DRIVER-DIMM-LCM40
8031439591267

LCM dimmerabile 42W Output DC 2~100V
350mA; 2~80V 500mA; 2~67V 600mA; 2~57V
700mA; 2~45V 900mA; 2~40V 1050mA
Input 180 ~ 295VAC 254~417VDC



Misure - size
dimensioni in mm - size mm
123,5X81,5X23



I-DRIVER-DIMM-LCM60
8031439561260

LCM dimmerabile 60W Output DC 2~90V 500mA;
2~90V 600mA; 2~86V 700mA; 2~67V 900mA;
2~57V 1050mA; 2~42V 1400mA
Input 180 ~ 295VAC 254~417VDC



Misure - size
dimensioni in mm - size mm
123,5X81,5X23

DRIVER



Driver HLG IP67 12-24V



I-DRIVER-HLG-120-12
8031440360272

Output 12V 10A 120W IP67
Input 90 ~ 305VAC 127 ~ 431VDC



Misure - size
dimensioni in mm - size mm
220X68X38,8



I-DRIVER-HLG-120-24
8031440360241

Output 24V 5A 120W IP67
Input 90 ~ 305VAC 127 ~ 431VDC



Misure - size
dimensioni in mm - size mm
220X68X38,8



I-DRIVER-HLG-320-12
8031440360258

Output 12V 22A 264W IP67
Input 90 ~ 305VAC 127 ~ 431VDC



Misure - size
dimensioni in mm - size mm
252X90X43,8



I-DRIVER-HLG-320-24
8031440360227

Output 24V 13.34A 320W IP67
Input 90 ~ 305VAC 127 ~ 431VDC



Misure - size
dimensioni in mm - size mm
252X90X43,8

DRIVER



Driver ELG 24V IP67 dimmerabili e LPV 24V IP67 - Dimmable driver ELG 24V IP67 and LPV 24V IP67



I-DRIVER-ELG-100-24
8031414876914

ELG Dimmerabile
Output 24V 4A 100W IP67
Input 100 ~ 305VAC 142 ~ 431VDC
continuo,320VAC for 24Hrs; 360VAC for 1Hr



Misure - size
dimensioni in mm - size mm
199X63X35,5



I-DRIVER-ELG-100-24DA
8031414876921

ELG Dimmerabile DALI
Output 24V 4A 100W IP67
Input 100 ~ 305VAC 142 ~ 431VDC
continuo,320VAC for 24Hrs; 360VAC for 1Hr



Misure - size
dimensioni in mm - size mm
199X63X35,5



I-DRIVER-ELG-150-24
8031414876891

ELG Dimmerabile
Output 24V 6.25A 150W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
219X63X35,5



I-DRIVER-ELG-150-24DA
8031414876907

ELG Dimmerabile DALI
Output 24V 6.25A 150W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
219X63X35,5



I-DRIVER-ELG-240-24
8031414876877

ELG Dimmerabile
Output 24V 10A 240W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
244X71X37,5



I-DRIVER-ELG-240-24DA
8031414876884

ELG Dimmerabile DALI
Output 24V 10A 240W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
244X71X37,5



I-DRIVER-LPV-60-24
8031414876839

LPV Output 24V 2.5A 60W IP67
Input 90 ~ 264VAC 127 ~ 370VDC



Misure - size
dimensioni in mm - size mm
162,5X42,5X32



I-DRIVER-LPV-100-24
8031414876853

LPV Output 24V 4.2A 100W IP67
Input 90 ~ 264VAC 127 ~ 370VDC



Misure - size
dimensioni in mm - size mm
190X52X37



I-DRIVER-LPV-150-24
8031414876860

LPV Output 24V 6.3A 150W IP67
Input 180 ~ 305VAC 254 ~ 431VDC



Misure - size
dimensioni in mm - size mm
191X63X37,5

DRIVER



Driver XLG 24V IP67



I-DRIVER-XLG-75-24
8031414873708

Output 24V 3.1A 75W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
140X63X32



I-DRIVER-XLG-100-24
8031414875705

Output 24V 4A 100W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
140X63X32



I-DRIVER-XLG-150-24
8031414879601

Output 24V 6.25A 150W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
180X63X35,5



I-DRIVER-XLG-200-24
8031414879588

Output 24V 8.3A 200W IP67
Input 100 ~ 305VAC 142 ~ 431VDC



Misure - size
dimensioni in mm - size mm
199X63X35,5

ADATTATORI

Adattatore tensione costante - Constant voltage power supply



STRIP-ADAT-12W
8031433141208

12V 12W - SPINA CEE 7/16 IP20 - OUTPUT 12V 1A INPUT 110-240V 0,5A
MISURE - size 38X67X42mm - CAVO 1500mm - IP20 - CLASSE 2



STRIP-ADAT-24W
8031433251204

12V 24W - SPINA CEE 7/16 IP20 - OUTPUT 12V 2A INPUT 110-240V 0,6A
MISURE - size 38X80X50 mm - CAVO 1500mm - IP20 - CLASSE 2



STRIP-ADAT-36W
8031436601235

LED 12V 36W - SPINA CEE 7/16 IP20 - OUTPUT 12V 3A INPUT 110-240V 0,6A
MISURE - size 35X100X50 mm - CAVO 1500mm - IP20 - CLASSE 2

AMPLIFICATORE

Amplificatore segnale - Signal amplifier



STRIP-AMPLIFIER-5C
8031414871858

5 Canali Dc 12-24V
Output Current < 3A/Ch (5Channel)
Output Power:12V <180W; 24V<360W

Misure - size
dimensioni in mm - size mm
81X64X25

REMOTE CONTROL



RF-COM-1CH
8031414876402

Radiocomando RF 2,4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non include
RF 2,4G remote control dimming light 4 zone 1 channel 2xAAA not included

Dimming



RF-COM-2CH
8031414876396

Radiocomando RF 2,4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non include
RF 2,4G remote control cct adjustable white 4 zone 2 channels 2xAAA not included

luce calda
warm white luce naturale
natural white luce fredda
cool white



RF-COM-5CH
8031414876419

Radiocomando RF 2,4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non include
RF 2,4G remote control RGB/RGBW/RGB+CCT 4 zone 5 channels 2xAAA not included

RGB

luce calda
warm white luce naturale
natural white luce fredda
cool white



RF-WALLPAD-1CH
8031414876426

Wallpad RF 2,4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non include
RF 2,4G wallpad dimming light 4 zone 1 channel 2xAAA not included

Misure - size
dimensioni in mm - size mm
86X86X36,5

Dimming



RF-WALLPAD-2CH
8031414876433

Wallpad RF 2,4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non include
RF 2,4G wallpad cct adjustable white 4 zone 2 channels 2xAAA not included

Misure - size
dimensioni in mm - size mm
86X86X36,5

luce calda
warm white luce naturale
natural white luce fredda
cool white



RF-WALLPAD-5CH
8031414876440

Wallpad RF 2,4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non include
RF 2,4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 2xAAA not included

Misure - size
dimensioni in mm - size mm
86X86X36,5

RGB

luce calda
warm white luce naturale
natural white luce fredda
cool white



RF-DMXPAD-1CH
8031414876457

Wallpad RF 2,4G controllo dimmer-varialuce 4 zone 1 canale 230V collegabile con protocollo DMX 512 -
RF 2,4G wallpad dimming light 4 zone 1 channel 230V linkable with DMX512 protocol

Misure - size
dimensioni in mm - size mm
120X80X37

Dimming



RF-DMXPAD-2CH
8031414876464

Wallpad RF 2,4G controllo CCT bianco dinamico 4 zone 2 canali 230V collegabile con protocollo DMX 512
RF 2,4G wallpad cct adjustable white 4 zone 2 channels 230V collegabile con protocollo DMX 512

Misure - size
dimensioni in mm - size mm
120X80X37

luce calda
warm white luce naturale
natural white luce fredda
cool white



RF-DMXPAD-5CH
8031414876471

Wallpad RF 2,4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 230V collegabile con protocollo DMX 512

RF 2,4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 230V collegabile con protocollo DMX 512

luce calda
warm white luce naturale
natural white luce fredda
cool white



RF-RICEVITORE-2CH
8031414876488

Ricevitore RF 2,4G 2 canali per WALLPAD/RADIOCOMANDO/WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT Input: 10,5A 12-24V Output: 2CH;5A/CH - 2x(60-120)W

RF 2,4G receiver box 2 channels for WALLPAD/RADIOCOMANDO/WALLPAD DMX usable for SINGLE COLOR/CCT

Input: 10,5A 12-24V Output: 2CH;5A/CH - 2x(60-120)W



RF-RICEVITORE-5CH
8031414876495

Ricevitore RF 2,4G 5 canali per WALLPAD/RADIOCOMANDO/WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input: 15,5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W

RF 2,4G receiver box 5 channels for WALLPAD/RADIOCOMANDO/WALLPAD DMX usable for SINGLE COLOR/CCT/RGB/RGBW/RGB+CCT

Input: 15,5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W



RF-WIFI-CONTROL-5CH
8031414878710

Ricevitore Wi-Fi + RF 2,4G 5 canali per WALLPAD/RADIOCOMANDO/WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input: 15,5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W

Wi-Fi + RF 2,4G receiver box 5 channels for WALLPAD/RADIOCOMANDO/WALLPAD DMX usable for SINGLE COLOR/CCT/RGB/RGBW/RGB+CCT

Input: 15,5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W



RF-BT-CONTROL-5CH
8031414878826

Ricevitore Bluetooth + RF 2,4G 5 canali per WALLPAD/RADIOCOMANDO/WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input: 15,5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W

Bluetooth + RF 2,4G receiver box 5 channels for WALLPAD/RADIOCOMANDO/WALLPAD DMX usable for SINGLE COLOR/CCT/RGB/RGBW/RGB+CCT

Input: 15,5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W



LED-CONTROL-RGBW
8031414862498

Kit controller + radiocomando 2,4G per prodotti LED RGBW DC24V 6A 144W x 4 canali Controller + 2,4G remote control kit for LED RGBW items DC24V 6A 144W x 4 channels



STRIP-CONTROL-WIFI
8031440359474

Kit controller + radiocomando 2,4G per prodotti LED RGBW DC 12/24V 6Ax3ch Max Distanza 20m Controller + 2,4G remote control kit for LED RGBW items DC 12/24V 6Ax3ch Max distance 20m

STRIP-CONTROL-WIFI

Powered by tuya Intelligence Inside

STRIP-CONTROL-WIFI

Powered by tuya Intelligence Inside



STRIP-SOUND
8031434531213


Ricevitore musicale + telecomando RGB 12V PER STRIP LED Musical control receiver RGB 12V for strip led + remote control

STRIP-SOUND

Powered by tuya Intelligence Inside

STRIP-SOUND

Powered by tuya Intelligence Inside

I-CLAY-SCADER
8031414865031SCATOLA DI DERIVAZIONE ELETTRICA CLAY IN PORCELLANA BIANCA
ø 80x H 45 mm
white porcelain external junction box CLAYI-CLAY-INTERRUTTORE
8031414865048INTERRUTTORE ROTATIVO CLAY IN PORCELLANA BIANCA 10A AC230V 50Hz
ø 65x H 60 mm
white porcelain rotating switch CLAY 10A AC230V 50HzI-CLAY-PRESA
8031414865055PRESA ELETTRICA CLAY POLIVALENTE IN PORCELLANA BIANCA 10/16A
AC230V 50Hz ø 65x H 37 mm
white porcelain universal socket CLAY 10/16A AC230V 50HzI-CLAY-PRESA-F
8031414865062PRESA ELETTRICA SCHUKO CLAY IN PORCELLANA BIANCA
AC230V 50Hz ø 65x H 50 mmI-CLAY-E27
8031414871117PORTALAMPADA CLAY IN PORCELLANA BIANCA E27
AC230V 50Hz - H 60 ø 45 mm
white porcelain E27 lamp-holder AC230V 50HzI-CLAY-E14
8031414870929PORTALAMPADA CLAY IN PORCELLANA BIANCA E14
AC230V 50Hz - H 60 ø 35 mm
white porcelain E14 lamp-holder AC230V 50HzI-CLAY-BASE
8031414870936ROSONE IN PORCELLANA BIANCA ø105 - H 30 mm
white porcelain canopy ø 105 - H 30 mmI-CLAY-ISOLATORI
8031414865079KIT 4PZ ISOLATORI CLAY IN PORCELLANA BIANCA
ø 18x H 20 mm
white porcelain pulleys CLAY set 4pcsI-CLAY-CAVO-BCO
8031414865086CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 5m 3X0,75
twisted white fabric wire CLAY 5m 3X0,75I-CLAY-CAVO-2P-BCO
8031414865277CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
BIANCO 5m 2X0,75 twisted white fabric wire CLAY 5m 2X0,75I-CLAY-CAVO-R25 BCO
8031414871162CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 25m 2X0,75 twisted white fabric wire CLAY 25m 2X0,75I-CLAY-CAVO-ORO
8031414865093CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN ORO 5m 3X0,75 twisted white fabric wire CLAY 5m 3X0,75I-CLAY-CAVO-2P-ORO
8031414865284CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE ORO
5m 2X0,75 twisted white fabric wire CLAY 5m 2X0,75I-CLAY-CAVO-R25 ORO
8031414871131CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN ORO 25m 2X0,75 twisted white fabric wire CLAY 25m 2X0,75I-CLAY-CAVO-R25 MAR
8031414871148CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 25m 2X0,75 twisted white fabric wire CLAY 25m 2X0,75I-CLAY-CAVO3X1,5 BCO
8031414877980CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 2,5m 3X1,5mm
twisted white fabric wire CLAY 2,5m 3X1,5mmI-CLAY-CAVO3X1,5 MAR
8031414878000CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 2,5m 3X1,5mm
twisted white fabric wire CLAY 2,5m 3X1,5mmI-CLAY-CAVO3X1,5 ORO
8031414877997CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN ORO 2,5m 3X1,5mm
twisted white fabric wire CLAY 2,5m 3X1,5mm



I-PORTALAMPADE-E14-L
8031440354592

Portalampada E14 con copertura liscia in PET



I-PORTALAMPADE-E14-S
8031440354578

Portalampada E14 in PET con copertura filettata e ghiera



I-PORTALAMPADE-E14-T
8031440354585

Portalampada E14 in PET con copertura mezza filettata con ghiera



I-PORTALAMPADE-E27-L
8031440354554

Portalampada E27 con copertura liscia in PET



I-PORTALAMPADE-E27-P
8031440354561

Portalampada E27 in PBT



I-PORTALAMPADE-E27-S
8031440354530

Portalampada E27 in PET con copertura filettata e ghiera



I-PORTALAMPADE-E27-T
8031440354547

Portalampada E27 in PET con copertura mezza filettata con ghiera



I-PORTALAMPADE-GU10
8031435751221

Portalampada GU10 in PBT con cavo di 12 cm




I-PORTALAMPADE-MR16
8031439761264

Portalampada MR16 in PBT con cavo di 10 cm



I-PORTALAMPADE-T8
8031439851262

Portalampada T8 in PBT fissaggio a clip

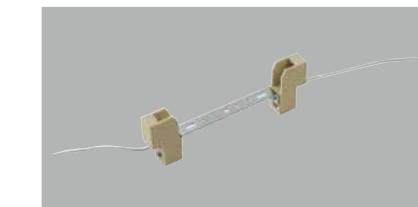


I-PORTALAMPADE-R7S
8031414861491

Portalampada R7S 118 mm in PBT incluso filo da 15 cm



I-PORTALAMPADE-G9
8031414862962

Portalampada G9 in PBT con cavo di 10 cm

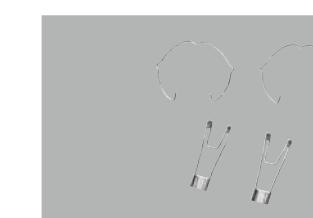

INC-MATRIX-KIT
8031436551233






Kit molle e anello per faretti incasso GU10.




CABLAGGIO
8031414865499

CABL. TRIP. CAVO TONDO BCO CM250 H05VV-F 3X0,75 - SPINA ITALIA 10A, 250V

ADATTATORI / LAMP HOLDER ADAPTERS

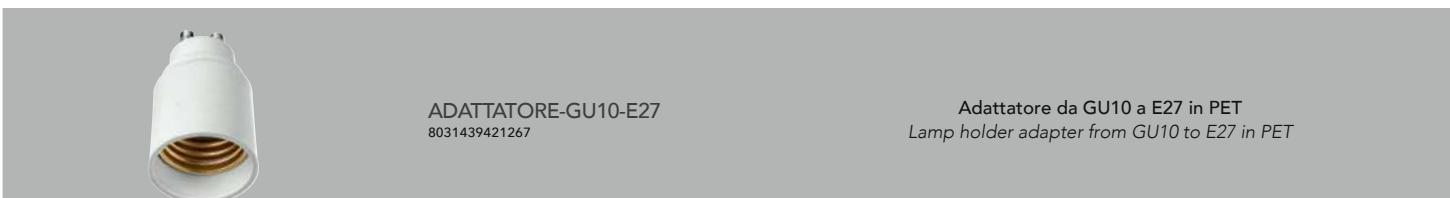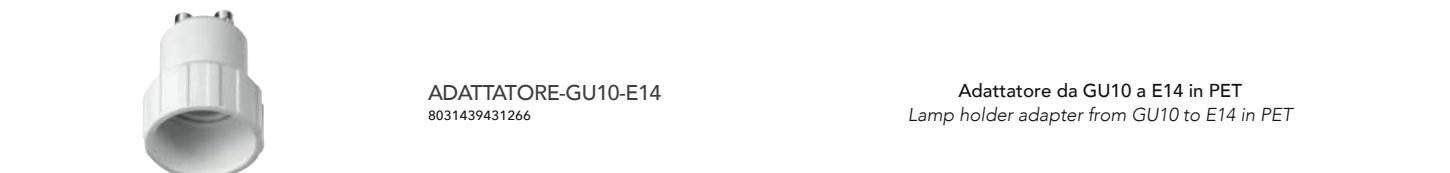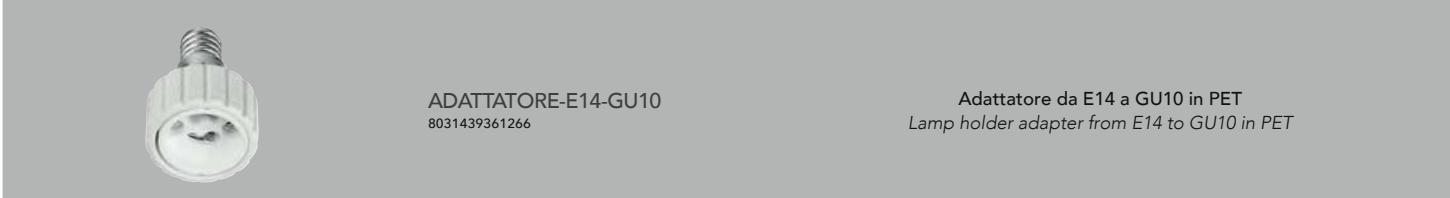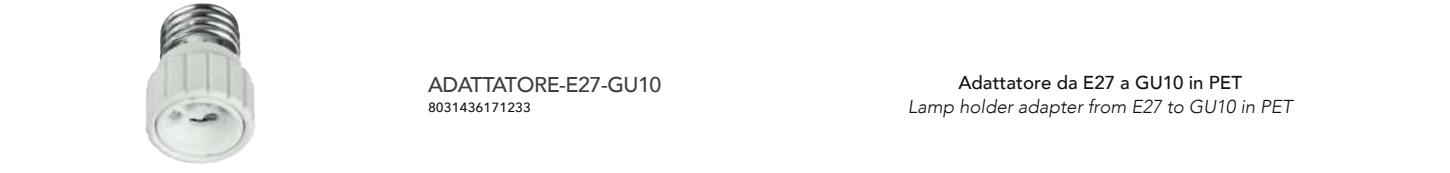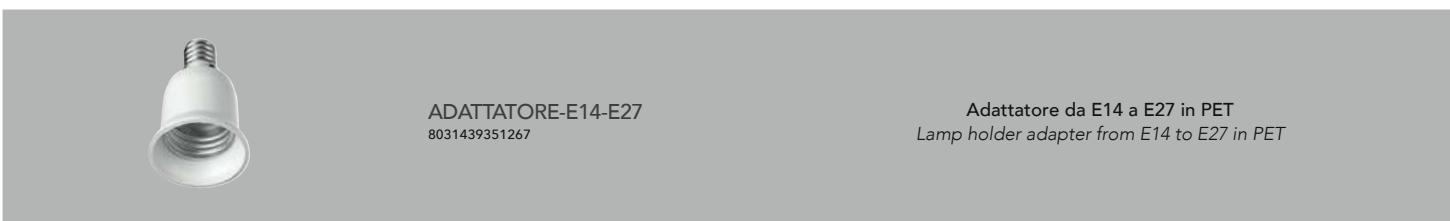

ADATTATORI / LAMP HOLDER ADAPTERS

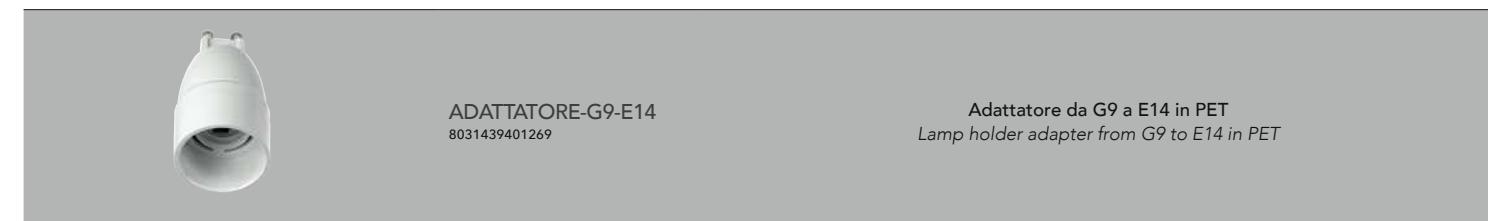

ACCESSORI

I-POWER-SC-BP2-USB2
8031414864911ADATTATORE MULTIPRESA ON/OFF 1XSCHUKO+2 BIPASSO+2USB2.1A 230V 10/16A
CAVO 1,5M SPINA H05VV-FI-POWER-SC2-BP4
8031414864881ADATTATORE MULTIPRESA INTERRUTTORE ON/OFF 2XSCHUKO+4 BIPASSO 230V
10/16A CAVO 1,5M SPINA H05VV-FI-POWER-SC3
8031414864843ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 3XSCHUKO 230V 10/16A
CAVO 1,5M SPINA H05VV-FI-POWER-SC3-BP6
8031414864904ADATTATORE MULTIPRESA INTERRUTTORE ON/OFF 3XSCHUKO+6X BIPASSO 230V
10/16A CAVO 1,5M SPINA H05VV-FI-POWER-SC4
8031414864850ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 4XSCHUKO 230V 10/16A
CAVO 1,5M SPINA H05VV-FI-POWER-SC5
8031414864867ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 5XSCHUKO 230V 10/16A
CAVO 1,5M SPINA H05VV-FI-POWER-SC6
8031414864874ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 6XSCHUKO 230V 10/16A
CAVO 1,5M SPINA H05VV-F

Wi-Fi

INTEC[®]
LIGHT

Good solution for your Smart life!

SMART HUB

SMART-GATEWAY-BT
8031414878970Interfaccia di collegamento dispositivo bluetooth con rete wifi
Device connection interface bluetooth with wifi network

SMART PLUG

SMART-POWER-SC4USB3
8031414879014

ADATTATORE MULTIPRESA WIFI 4 SCHUKO 3 USB 1000-2400W 10A INPUT 100-240V WIFI 2.4GHz

SMART-PRESA
8031414878987

ADATTATORE PRESA WIFI 230V 50Hz 16A FREQUENZA 2.4GHz

COMMUTATORI SMART

SMART-SWITCH-2
8031414879045CONTROLLER WIFI 2.4GHz
PER ACCENSIONE E TIMER
INTERRUTTORI 2 VIE 230V
MAX 10ASMART-SWITCH-1
8031414879038CONTROLLER WIFI 2.4GHz
PER ACCENSIONE E TIMER
INTERRUTTORI 1 VIA 230V
MAX 10ASMART-START
8031414879021CONTROLLER WIFI 2.4GHz
PER ACCENSIONE E TIMER
PRODOTTI 230V MAX 2200W/10A

SMART SENSOR

SMART-SENSOR
8031414879007

SENSORE INFRAROSSI WIFI 2.4GHz

SMART-PORTER
8031414878994

SENSORE PORTE E FINESTRE WIFI 2.4GHz ALIMENTATO A BATTERIE AAA1,5V



Divisione F.A.N. EUROPE LIGHTING s.r.l. a socio unico



Agglomerato A.S.I Località Bosco Fangone 80035 Nola (Napoli)
Tel. +39 0813151017 - Tel. +39 0818210771 - Fax +39 081 4629040
info@faneurope.it

www.faneurope.it



[DOWNLOAD CATALOG](#)

L'azienda si riserva il diritto di effettuare modifiche ai prodotti presenti in questo catalogo senza preavviso alcuno.
The company reserves the right to make changes to the products in this catalog without prior notice.



SMART INTEC

SCARICA L'APP SMART INTEC SU:
DOWNLOAD APP SMART INTEC ON:



Download on the
App Store



GET IT ON
Google Play



8 031414 877256